

DJI Mic 3


Quick Start Guide

Introduction

DJI Mic 3 boasts a dual-channel wireless audio system that includes two wireless transmitters and a dual-channel receiver, allowing for simultaneous recording of two audio sources. Transmitters feature built-in high-quality omnidirectional microphones and are equipped with clips for convenient portability. The standard charging case can charge both transmitters and receiver simultaneously and enables automatic linking between them. The transmitter clip is detachable and magnetic, supporting various wearing options.

DJI Mic 3

DJI Mic 3 Transmitter

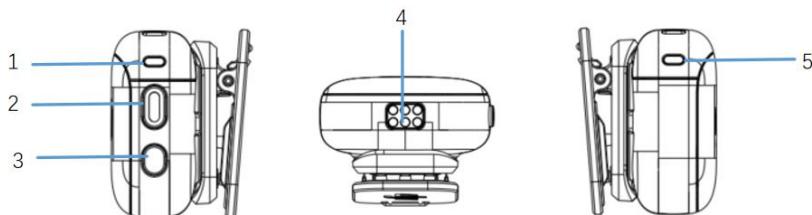

1. System Status LED

Indicates transmitter status, including connection status, battery level, RF status and mode, and noise reduction status.

2. Recording Button

Press and hold for 2 seconds to power on or off. Press once to start or stop recording.

Press twice to enable or disable noise reduction.

3. Linking Button

Press and hold for 2 seconds to initiate linking. After connecting, press once to start or stop recording on the Bluetooth device, and press twice to switch the working mode.


4. Charging Contacts

Connect to the charging contacts of the charging case or cable to start charging. It can also be used for data export.

5. Recording Status LED

A red light indicates that internal recording is in progress.

DJI Mic 3 Receiver

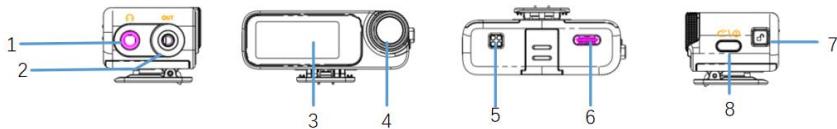

1、3.5 mm Jack (Audio Listening)

Insert 3.5mm TRS headphones to listen to the transmitter audio.

2、3.5 mm Jack (line out)

For audio output.

3、Touchscreen

4、Dial

Rotate to adjust gain.

5、Charging Contacts

Connect to the charging contacts of the charging case or cable to start charging.

6、USB-C Port

For connecting to a computer for upgrades, as a computer microphone when paired with the transmitter, and also for charging.


7、Adapter Release Button

8、Power Button

Press and hold for 2 seconds to power on or off. Press once to lock or unlock the screen.

When the receiver is not on the home screen, press once to return to the home screen.

DJI Mic 3 Charging Case

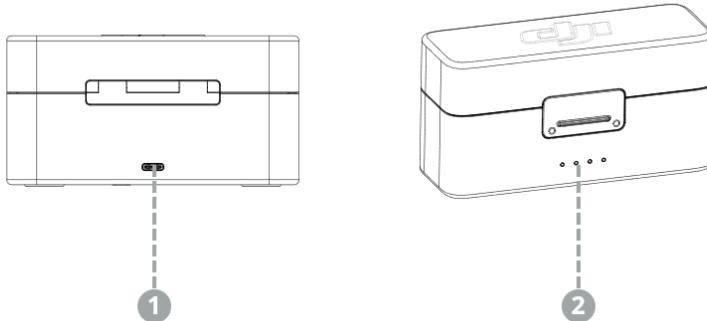

1. Charging port (USB-C)

Charge the charging case itself through the USB-C port.

2. Power indicator

Displays information about the current charge level of the charging case. See the table below for details.

 Indicates the battery level of the charging case.

-  LED is on
-  LED is flashing
-  LED is off

LED1	LED2	LED3	LED4	Battery Level During Charging (LEDs blink in sequence)
				76~99%
				51~75%
				26~50%
				≤25%
				Fully charged (Power off)
LED1	LED2	LED3	LED4	Battery Level
				76~100%
				51~75%
				26~50%
				10~25%
				<10%

Japan Warning message

W52/W53: only indoor use.

To view the full compliance information, slide down on the camera view, tap the settings icon, and scroll through to select Compliance Info.

WARNING

1. This product contains magnets. Keep the product away from magcards, implantable medical devices such as pacemakers, hard disks, RAM chips, and other devices to avoid interference.
2. This product is not waterproof. If the inside of the battery comes into contact with water, chemical decomposition may occur, potentially resulting in the battery catching on fire, and may even lead to an explosion.
3. The batteries should be used at a temperature between -10 °and 45 °C (14 °and 113 °F). A high temperature can cause an explosion or fire. A low temperature will reduce the performance of a battery.
4. DO NOT leave the product near heat sources such as inside a vehicle on hot days.
5. DO NOT store the product for an extended period of time after fully discharging the battery. Otherwise, the battery may over-discharge and cause irreparable damage.
6. The packaging contains small parts. Keep out of reach of children to prevent any small parts from being accidentally swallowed.

FCC Compliance Notice

Supplier's Declaration of Conformity

Product name: DJI Mic 3

Model Number: DMT03 / DMR03

Responsible Party: DJI Research LLC

Responsible Party Address: 17301 Edwards Road, Cerritos, CA 90703

Website: www.dji.com

We, DJI Research LLC, being the responsible party, declares that the above mentioned model was tested to demonstrate complying with all applicable FCC rules and regulations.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a **Class B** digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

End user must follow the specific operating instructions for satisfying RF exposure compliance. This

transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. The portable device is designed to meet the requirements for exposure to radio waves established by the Federal Communications Commission (USA).

These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on the body.

These requirements set a SAR limit of 4 W/kg averaged over ten gram of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on the limbs.

ISED Compliance Notice

CAN ICES-003 (B) / NMB-003(B)

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) L'appareil ne doit pas produire de brouillage; (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with RSS-102 radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. The portable device is designed to meet the requirements for exposure to radio waves established by the RSS-102.

Cet équipement est conforme aux limites d'exposition aux rayonnements CNR-102 établies pour un environnement non contrôlé. L'utilisateur final doit suivre les instructions spécifiques pour satisfaire les normes. Cet émetteur ne doit pas être co-implanté ou fonctionner en conjonction avec toute autre antenne ou transmetteur. Le dispositif portatif est conçu pour répondre aux exigences d'exposition aux ondes radio établie par le développement énergétique DURABLE.

These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on the body.

Ces exigences un SAR limite de 1,6 W/kg en moyenne pour un grammme de tissu. La valeur SAR la plus

élevée signalée en vertu de cette norme lors de la certification de produit à utiliser lorsqu'il est correctement porté sur le corps.

These requirements set a SAR limit of 4W/kg averaged over ten grams of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on the limbs.

Ces exigences un SAR limite de 4 W/kg en moyenne pour dix gramme de tissu. La valeur SAR la plus élevée signalée en vertu de cette norme lors de la certification de produit à utiliser lorsqu'il est correctement porté sur le membres.

No operation is permitted for the frequency “5600-5650 MHz”

Aucune opération n'est autorisée pour la fréquence « 5600-5650 MHz »

The device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

Les dispositifs fonctionnant dans la bande de 5 150 à 5 250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

Where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 6.2.2.3 shall be clearly indicated.

Lorsqu'il y a lieu, les types d'antennes (s'il y en a plusieurs), les numéros de modèle de l'antenne et les pires angles d'inclinaison nécessaires pour rester conforme à l'exigence de la p.i.r.e. applicable au masque d'élévation, énoncée à la section 6.2.2.3, doivent être clairement indiqués.

EU & UK Compliance Notice



EU Compliance Statement: SZ DJI Osmo Technology Co., Ltd. hereby declares that this device (DJI Mic 3 Transmitter / DJI Mic 3 Receiver (DMT03 / DMR03)) is in compliance with the essential requirements and other relevant provisions of the Directive 2014/53/EU.

A copy of the EU Declaration of Conformity is available online at www.dji.com/euro-compliance

EU contact address: DJI GmbH, Industriestrasse 12, 97618, Niederlauer, Germany

GB Compliance Statement: SZ DJI Osmo Technology Co., Ltd. hereby declares that this device (DJI Mic 3 Transmitter / DJI Mic 3 Receiver (DMT03 / DMR03)) is in compliance with the essential requirements and other relevant provisions of Radio Equipment Regulations 2017, [the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012](#).

A copy of the GB Declaration of Conformity and PSTI SOC are available online at www.dji.com/euro-compliance

Environmentally friendly disposal



Old electrical appliances must not be disposed of together with the residual waste, but have to be disposed of separately. The disposal at the communal collecting point via private persons is for free. The owner of old appliances is responsible to bring the appliances to these collecting points or to similar collection points. With this little personal effort, you contribute to recycle valuable raw materials and the treatment of toxic substances.