



User Manual



BZ-201

Wireless Stereo Speaker
System



FEATURES


- Studio-quality sound performance
- Immersive bass & crystal treble for multimedia entertainment
- Multiple connections compatible with various portable devices

SPECIFICATIONS

RMS Output power	50 watts [@ 10% THD]
Subwoofer driver	2 * 5.25 inch
Tweeter driver	2 * 1 inch
Frequency response	50Hz-20kHz
S/N Ratio	≥75dB
Separation	≥63dB
Side controller	Volume / Treble / Bass / Input switch
Weight	13.23 lb [6.0kg]
Dimension	6.85[L] x 10.1[H] x 7.8[W]inch [174[L] x 256[H] x 199[W]mm]

PACKAGE CONTENTS

- BZ-201 Wireless Stereo Speaker System
- User manual
- 4.9ft Speaker cable
- 4.9ft RCA to 3.5mm stereo cable
- 4.9ft 3.5mm to 3.5mm stereo cable
- 4.9ft AC power cord

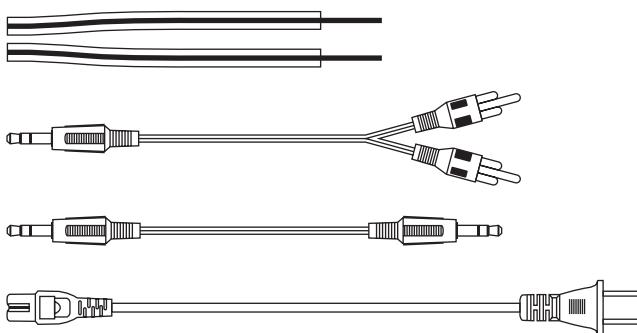




A. Wired Connection


INPUT 2 Mode [3.5mm socket]

1. Press the **MODE/VOLUME** until the indicator turns to “GREEN”.
2. Connect the 3.5mm plug of the audio cable into the 3.5mm socket on the powered speakers.
3. Connect the RCA plugs (white and red) to the audio devices that are capable of fitting into the RCA socket.
4. Stream the music from your device and adjust the volume properly.
5. Once the streaming signal is paused for over 10 minutes, the speakers will go into STANDBY mode, and the indicator will turn to RED. To wake the speakers up, simply start streaming music.

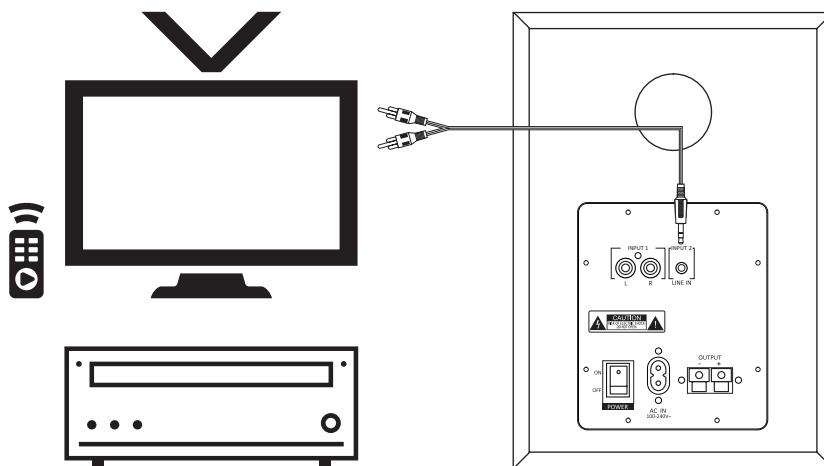




I/O CONNECTIONS

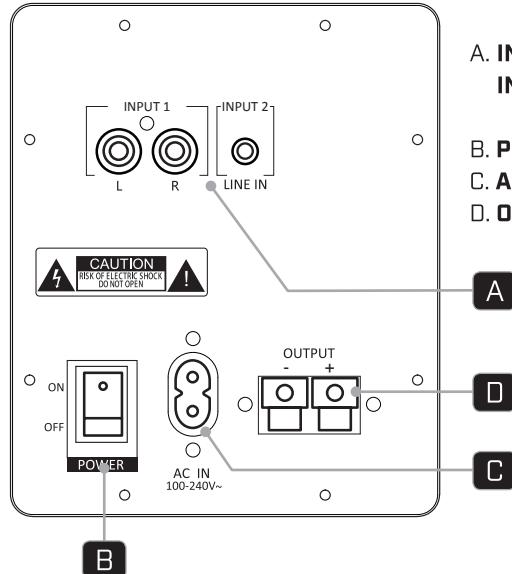

- A. **INPUT 1:** Analog input via RCA audio socket.
- INPUT 2:** Analog input via 3.5mm audio socket.
- B. POWER:** Power on/off the system.
- C. AC IN:** To plug the AC power cord.
- D. OUTPUT:** To connect to the cable of satellite speaker.

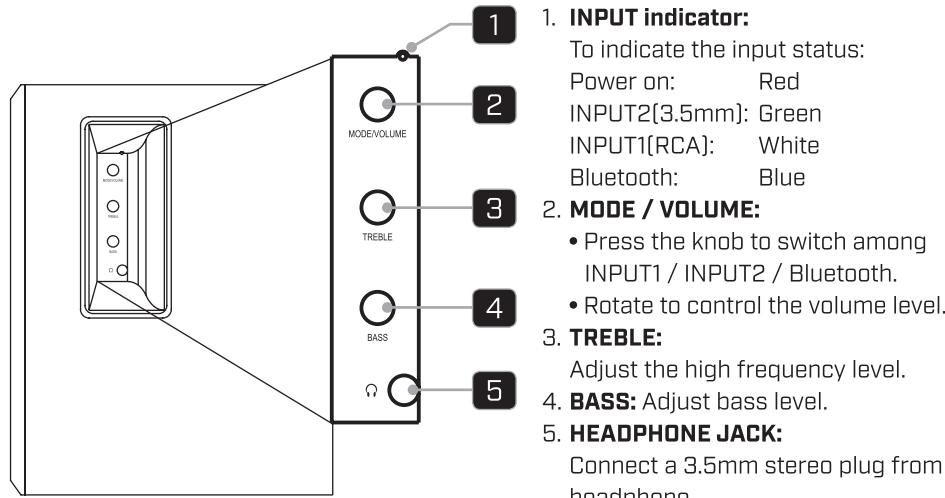


- 1. **INPUT indicator:**
To indicate the input status:
Power on: Red
INPUT2[3.5mm]: Green
INPUT1[RCA]: White
Bluetooth: Blue
- 2. **MODE / VOLUME:**
 - Press the knob to switch among INPUT1 / INPUT2 / Bluetooth.
 - Rotate to control the volume level.
- 3. **TREBLE:**
Adjust the high frequency level.
- 4. **BASS:** Adjust bass level.
- 5. **HEADPHONE JACK:**
Connect a 3.5mm stereo plug from headphone.




CONNECTION INSTRUCTIONS

1. Put the powered speaker on the right side, and the other one on the left side.
2. Connect the passive speaker cables into the powered speaker's **OUTPUT** socket.
Ensure the wire with the red ring is connected to the red clip(+) on both speakers.
3. Plug the AC power cord into a standard household electrical outlet.

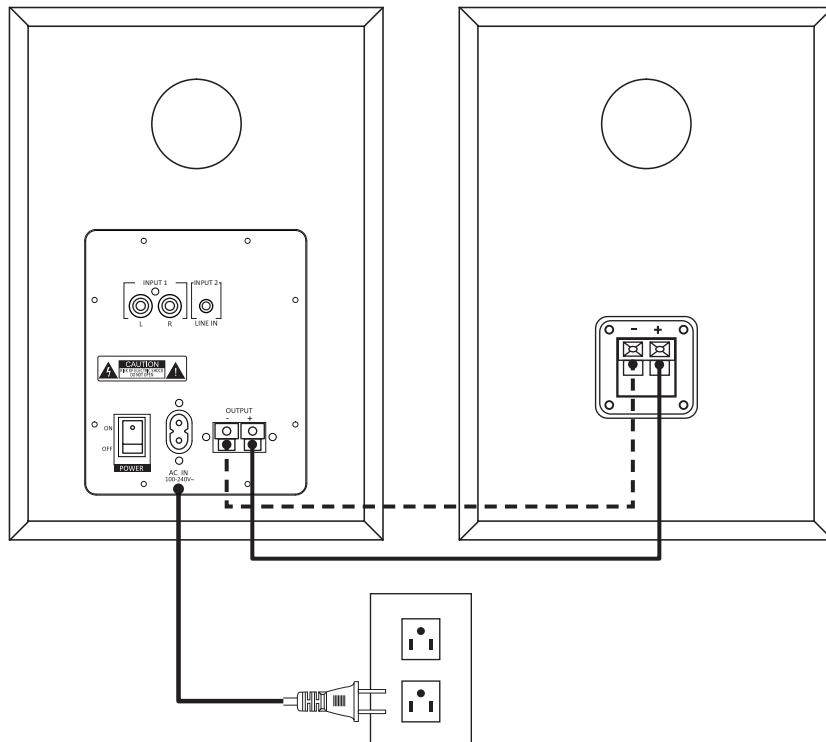

**INPUT 1 Mode [RCA socket]**

1. Press the **MODE/VOLUME** until the indicator turns to “WHITE”.
2. Connect the RCA plugs (white and red) of the audio cable into the RCA socket on the powered speakers
3. Connect the 3.5mm plug to the audio devices that are capable of fitting into a 3.5 socket.
4. Stream the music from your device and adjust the volume properly.
5. Once the streaming signal is paused for over 10 minutes, the speakers will go into STANDBY mode, and the indicator will turn to RED. To wake the speakers up, simply start streaming music.

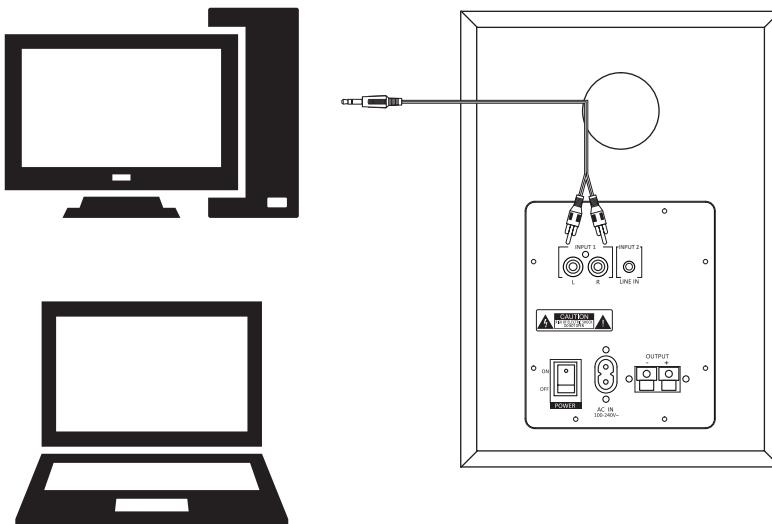




B. Wireless Connection

Bluetooth Mode

1. Press the **MODE/VOLUME** until the indicator turns to “BLUE”.
2. When the indicator flashes quickly, the speakers are ready for pairing to your Bluetooth device.
3. Activate the Bluetooth function in your devices, and find the “BZ-201” to connect.
4. Enter “0000” if password is required.
5. Stream the music from your device and adjust the volume properly.
6. Once the streaming signal is paused over 10 minutes, the speakers will go into STANDBY mode, and the indicator will turn to RED. To wake the speakers up, simply start streaming music.

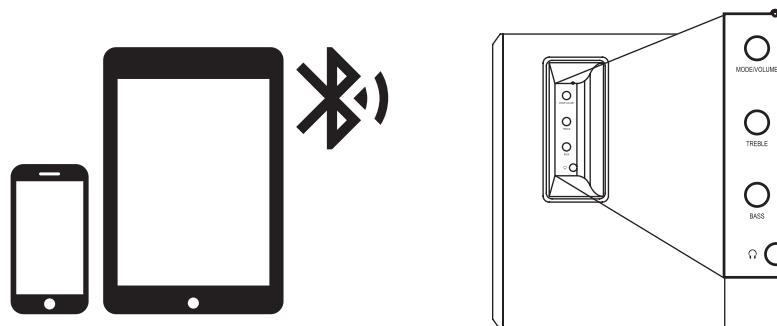

Notice: The wireless transmission distance may be not longer than 32ft.

WARNING

1. Do not connect the power plug into an AC outlet until all connections are made.
2. Please remove AC power cord if you do not use this device for a long time.
3. Do not expose the speakers to any dripping or splashing and make sure no object filled with liquids, such as vases, etc., are placed on them.



FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 - (1) This device may not cause harmful interference, and
 - (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body



Thank you for purchasing a quality Rosewill product.
Please register your product at www.rosewill.com for complete warranty information
and support for your product.

Rosewill® **Technical Support Information**
techsupport@rosewill.com • 1-800-575-9885