


正面

蓝牙音箱说明书

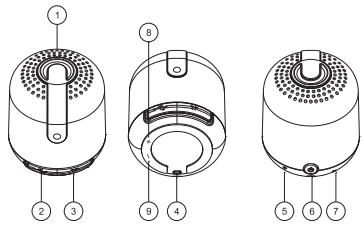

1. 喇叭
2. Micro USB接口
3. TF卡
4. 挂绳位
5. 复位键/LED灯
6. 开关按键
7. 麦克风孔
8. 音量+/下一首
9. 音量-/上一首

充电：
1. Micro USB接口外接5V充电器，充电指示灯亮。
2. 充电完成后红色指示灯灭。
注意：当播放音乐突然有低电量警告音出来后，表示电池电量不足，需要充电。如不进行充电，产品会自动关机。
开机默认蓝牙模式，TF卡播后优先，双击开关切换模式

开机配对：
1. 长按[〇]键3秒，开机提示声过后请松开按键，本机蓝灯开始快闪进入配对状态，在Bluetooth蓝牙设备上执行配对步骤来检测本系统，本系统配对外为“A8”
2. 在Bluetooth立体声音源设备上的显示屏上出现检测的设备列表，本系统显示为“A8”，选择这个设备执行配对，配对过程中本系统发出一声提示音过后蓝灯慢闪状态，表示配对成功。
3. 本系统记忆最后连接的设备本系充每次重新开机，系统将会自动连接最后成功配对的设备
4. 本系统正和Bluetooth立体声音源设备连接时，若要本系统连接新的Bluetooth立体声音源设备，需在现在连接的设备上退出本系统的蓝牙装置式将蓝牙设置为(关)的模式，这时你就可以和新的设备配对了。
播放：
系统正和蓝牙立体声源设备连接时短按[〇]键一下或按立体声音源设备的播放键一下，本系统进入音乐播放状态，若要暂停播放状态，再短按[〇]一下即可。

※ 播放上一首: 在播放音乐状态下短按(-)键进入上一首播放状态。
※ 播放下一首: 在播放音乐状态下短按(+)键进入下一首播放状态。
※ 音量+: 在播放音乐状态下长按(+)键。
※ 音量-: 在播放音乐状态下长按(-)键。
接听来电：
来电时本系统发出来电指示声,短按[+]键一下就可以接听来电。
※ 来电拒接: 来电时本系统发出来电指示声, 长按[+]键即可拒接来电。
※ 挂断电话: 通话过程中如要挂断通话，短按[+]键，本系统将自动挂断当前的电话通话。

关机：
1. 长按[〇]键3秒进入关机状态，提示音过后蓝灯熄灭系统自动进入关机状态。
2. 当电量不足时系统将自动进入关机状态。
3. 当机子不连接时，超过5分钟本机自动进入关机状态。
充电：
使用USB连接线到本机接口，充电时红灯长亮，充满后红灯熄灭。
注：请在关机状态下对本机进行充电，才能保证电池电量达到充满状态。


温馨提示：
1. 在关机状态下充电才能保证锂电池能充满。
2. 如机子在开机状态下卡死为低电量死机，请使用细小竹签或铁丝，往灯孔里捅本机隐藏复位键即可复位关机。

规格参数：

额定功率	3W
频率响应	20HZ-20KHZ
失真度	<1%
信噪比	≥90DB
扬声器	4Ω3W diameter 31mm
电池容量	3.7V/500mAh
蓝牙版本	Bluetooth v4.2
产品尺寸	φ40.5*45.5mm
产品重量	49g

背面

Bluetooth Speaker

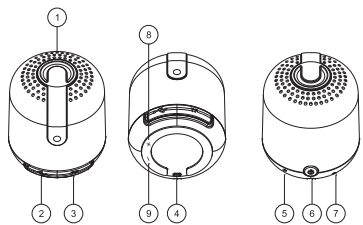

1. Speaker
2. Micro USB socket
3. TF Card
4. Hole for cord
5. Reset Key/LED indicator
6. On/Off button
7. Hole for MIC
8. Volume up/Next
9. Volume down/Previous

Charge: 1. When Micro USB connected with 5V charger, the indicator lighting will be turned on.
2. The indicator light will be turned off after finished charge.
Note: If there is a warning voice of low power when playing music, it means power is too low and need charge immediately. It will shut down automatically without charge.
The speaker is on bluetooth mode when turned on, TF mode would be prior to bluetooth mode after insert TF card. Double Press On/Off button to shift mode.
※ Boot Pairing
1. After 3 seconds Long press[〇] button and the starting up tone then release the button, blue light start fast flashing and the device enters pairing status automatically. Perform the pairing procedure on the Bluetooth device. The pairing named "A8".
2. This speaker would be named A8 on Bluetooth audio device, choose it and start pairing, this device will send out an indicator tone and start blue light flash slowly when paired successfully.
3. This speaker will auto connect with the last audio devices it connected.
4. When this speaker is connected with audio device, please exit and turn off the bluetooth, then connect with another new audio device.
You have to disconnect from bluetooth mode on the existing device first. Make sure that bluetooth mode is off before switching to another mode. If you would like to use bluetooth mode again, simply restart your A8.
※ Play
Your A8 Bluetooth speaker will begin play when you short-press [〇] or press the play button on a connected bluetooth stereo audio source. To pause play, short-press [〇].

※ To play the previous selection: Short-press (-) during play.
※ To play the next selection: Short-press (+) during play
※ Volume up + : Long-press (+) button.
※ Volume down - : Long-press (-) button.
※ **Answering a phone call:** If your phone is connected with the A8 speaker, there will be a warning tone from the speaker when you get phone call. Simply press[+] to pick up the phone call.
※ **Rejecting a phone call**
If your phone is connected with the A8 speaker, there will be a warning tone from speaker when you get a phone call. Long-press[+] to reject the call.
※ **Hang up a phone call**
Pressing [〇] button during a call will end up the call.
※ **Power off**
Long-press [〇] for three seconds to power the A8 off. A warning tone and blue LED will alert you that the A8 is inactive.
The A8 will power-off automatically when the battery becomes low. Without connection with an audio source for more than five minutes, the device will enter power-off status.
※ **Charging:**
Connect the provided USB cable with the A8 speaker. Red Led indicates the A8 is charging.
Red LED light off indicates the A8 is fully charged.

Notice:
1. Full charge need turn off the speaker.
2. Please use prod or wire to press Reset button which was hide on light hole to reset or turn off if the speaker was innormal when using.

SPECIFICATION :

Power	3W
Frequency	20HZ-20KHZ
THD	<1%
S/N	≥90DB
Speaker	4Ω3W diameter 31mm
Battery	3.7V/500mAh
Bluetooth Version	Bluetooth v4.2
Size	φ40.5*45.5mm
Weight	49g

<p>NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"> - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -Consult the dealer or an experienced radio/TV technician for help 	<p>Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p>This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.</p>		
---	---	--	--