


尺寸：70×100mm

材质：157g铜版纸


工艺：四色印刷

其他：风琴折

WiEppo



www.wieppo.com

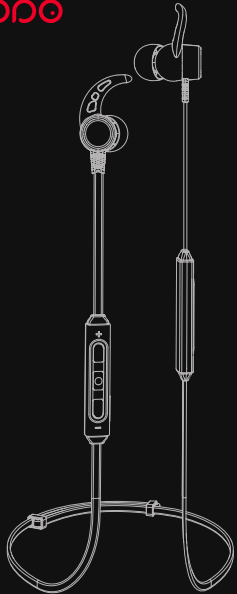


RB-790

Bluetooth Wireless Earphone


User Manual ▶

01 Warnings



- Do not listen through earphones at a high volume level for extended periods of time
- Do not use the earphones while driving, operating machinery, or performing other activities that require hearing surrounding sounds.
- Please charge the earphone at least every two month when the earphone is not frequently used.
- Do not expose the product to fire, high temperature, direct sunlight, or excessive physical shock.
- Do not clean the product while it is working or the battery is charging.

02 Packing Contents

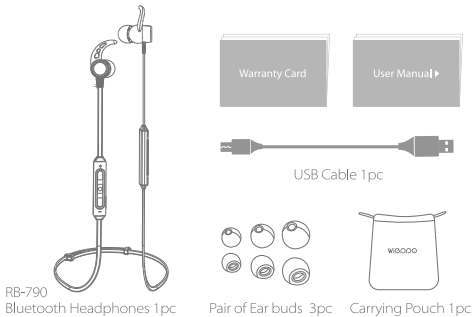

RB-790 Bluetooth Headphones 1pc

Pair of Ear buds 3pc

Carrying Pouch 1pc


03 Technique Parameters

Bluetooth Version	V4.2 + EDR
Bluetooth Profile	A2DP, HSP, HFP, AVRCP
Codec	SBC, MP3, AAC
Bluetooth Signal Distance	≤ 10 m / 33 ft
Playtime	≥ 4 h
Standby Time	≥ 100 h
Charging Time	2 h
Charger Port	Micro USB-B
Battery Type	Lithium-ion battery, 3.7V/80mAh
Charge Voltage	5±0.1V,≥200mA
Microphone sensitivity	~42dB
Impedance	16 Ω
Sensitivity	96 ± 3 dB
Frequency Response	20 Hz – 20 kHz
Weight	19g / 0.70oz

Note:

The Bluetooth signal unavailable depends on a variety of reasons. May be far or shorter than 10 m / 33 feet located obstacles between the headphone and your device, or your device does not even support Bluetooth 4.2 .

04 Key Functions

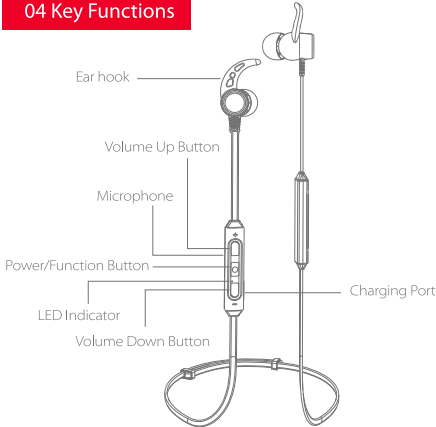

Listen to Music


Audio option	Action
Play or pause audio	Tap the Power/Function button
Skip to next track	Press the Volume Up button for 2 seconds
Play previous track	Press the Volume Down button for 2 seconds
Adjust the volume	Tap the volume up or volume down button

05 Charging The Earphones

- Uncover the charging port on remote.
- Insert the charging cable and connect the USB side to the power.
- While charging, the LED indicates in RED.
- LED Indicates in BLUE means fully charged.


Note:

Please fully charge the headphone when first time use it.Do not use the product on charging.(fully charge the device takes 2 hours)



06 Power On/Off

- Hold the Power/Function button for about 3 seconds till the LED flashes in blue twice and you will hear the sound "Power on".
- Hold the Power/Function button for about 3 seconds until the LED flashes in red twice and you hear the sound "Power off".




07 Bluetooth Pairing Steps

1. Hold the Power/Function button for 4 seconds till the LED indicator flashes in blue & red alternately to enter the pairing mode.

2. Turn on your Bluetooth device, select "RB-790" once it appears on the device list.

3. Once successfully paired, the LED indicator will only flash in blue and you will hear the sound "Connected".



Note:

- Paring mode will be enabled when the headphone is powered off only. If you have turned it on, pairing model will not appear.
- Enter the pairing code "0000" if requested. Otherwise you do not have to do this.
- Without any actions in paring mode, the device will automatically power off in 5 minutes.

08 Multipoint Connections

Multipoint connection feature enables 2 Bluetooth devices simultaneously connected to the earphones.

Connecting to a 2nd Bluetooth device:

- Disable the bluetooth function on the previous paired device.
- Power off the headphone.
- Both enable Bluetooth on the second device and power on the headphone for paring. Please refer to 07 Bluetooth Paring Steps.

Note:

- The earphone automatically connects with the most recently paired device ("Primary device").
- You must manually connect the second device ("Secondary device") to the earphone via its operating system.
- The earphone will prioritize the audio from Primary device.
- You can control Primary device using the earphone in line controller.
- When Primary device is idle, the earphone can receive audio from Secondary device.
- Secondary device must be controlled directly from its operating system.
- Simultaneous audio from both devices is disabled.
- Simultaneous call standby is possible, but the device that receives the call first takes priority. Calls cannot be made simultaneously.

09 Battery Status Display on IOS / Android Device

Users with iOS or Android devices will be able to view the battery status on their device's display after successfully paired.

10 FCC Certification Information

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID : 2AQO2RB-790