





Free Sport, Enjoy Music Life.

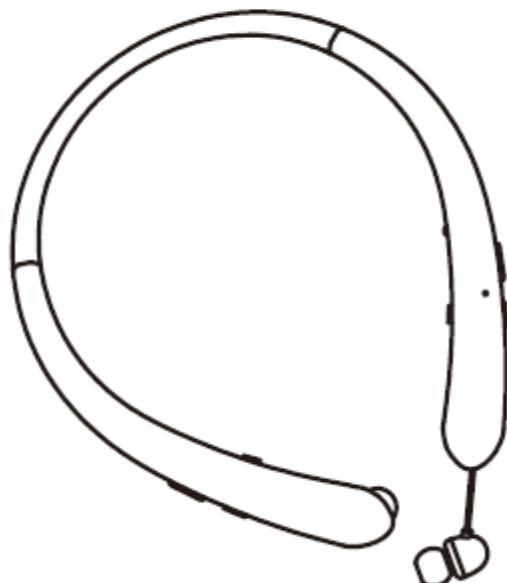

HX 965

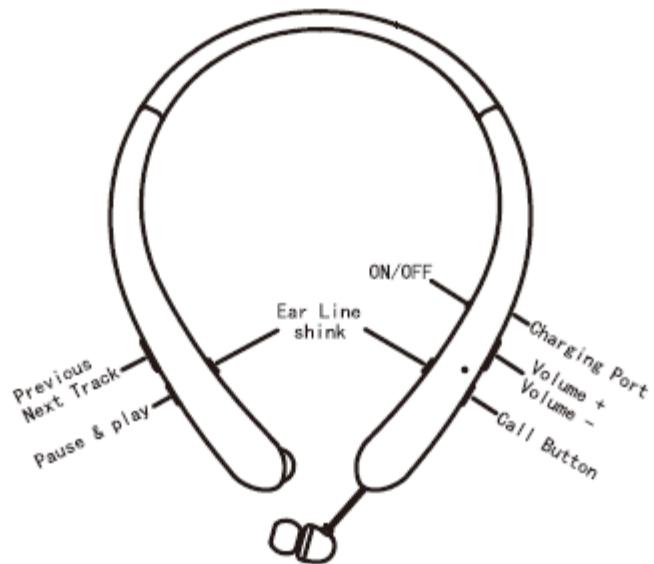

Specifications

Item	Description
Wireless specification	4.0(Headset/Hands Free/A2DP Profiles
Battery	Battery 3.7V/150 mAh Li Polymer
Standby time/Talk Time	Up to 550 hours/Up to 15 hours
Music play time	Up to 12 hours
Charging time	Less than 2 hours
Charging rated input	DC 5.0V,500Ma
Operation temperature	-10 ° C~60°C
Dimension/weight	150mm(W)x175mm(L)x15mm(H)/55g

How to Use

Power On/Power Off

- Slide the Power switch to the ON or OFF position

Charging

- When the charger is connected (with the power on or off) the headset will turn off
- While charging the LED indicator will show a solid red light and then change to violet, when charged 80% and above
- When charging is completed, the LED indicator will show a solid blue light

Low Battery

- An announcement will be made once every 2 minutes
- If the battery is not charged, the headset will turn off

Battery Status Alert

- Slide the VOLUME switch to the - position for 1 second
- There are 3 levels of battery power

Battery Status	High	Medium	Low
Voice Prompt	Battery High	Battery Medium	Battery Low
LED Indicator	Blinking	Blinking	Blinking
	Blue	Violet	Red
	3 times	3 times	3 times

Retractable Earbud Wire

- By pulling the left or right earbuds, the earbud wires can be extended
- Pressing the Earbud Wire Retraction button winds the earbud wire automatically.

How to Use

Pairing

- Before using the headset for the first time, you must pair it with a Wireless-enabled handset
- To pair your headset with an additional handset, the headset must be placed in Pairing Mode
- There are 2 Pairing Methods with the HX 965

Easy Pairing (First Time Pairing)

1. Slide the Power switch to the ON position to turn on the HX 965 When the headset enters Pairing Mode, the LED indicator will show a solid blue light
2. Using your handset, find the Wireless Menu and search for or add new devices Select HX 965 from the list of devices and pair it with your handset
3. If asked for the Pass/PIN code please enter 0000(4 Zeros)
Note If your handset supports Secure Simple Pairing (SSP), you will not need to enter Pass/PIN code

Once pairing has completed successfully, you will hear "Your headset paired" The HX 965 will automatically turn off if not paired within 3 minutes.

Manual Pairing (Pairing with another phone or re-pairing)

With the power off press the CALL button and slide the Power switch to the ON position at the same time for 2 seconds When the headset enters Pairing Mode, the LED indicator will show a solid blue light After the procedure repeat Easy Pairing steps 2 through 3

How to Use

Multi-connection

Advanced Multipoint

The HX 965 is capable of having two devices connected to the headset at the same time. This will give you the freedom of using call waiting between calls on both of your connected phones.

Connection

-Pair the headset with one of your Wireless-enabled handsets (see the pairing instructions on page 2)

Turn off the headset

-With the power off, press the CALL button and slide the power switch to the ON position at the same time for 2 seconds to enter Manual Pairing mode

Pair and connect the headset with your other Wireless-enabled handset (this will be your primary handset)

Once this handset is paired and connected, go back and connect the originally paired handset to the headset. This will now be your secondary handset.

NOTE When the HX 965 is connected to two handsets at the same time (Multipoint), the headset calling functions will work with the primary handset
NOTE In case of failure to connect to the primary phone through Easy Pairing, HX 965 will enter pairing mode

Calling Function

Voice Dialing and Last Number Redial features work with the primary handset (or handset which made the last outgoing call)

Call Waiting

While speaking on an active call, press the CALL button for 1 second to switch to an incoming call

To switch between 2 active calls, press the CALL button for 1 second

To terminate the active call or both calls at once, briefly press the CALL button

If both handsets are receiving an incoming call, the headset will default to the primary device

How to Use

Auto Reconnect

- If the HX 965 is turned off (either accidentally or intentionally) while connected to a handset, the headset and handset will disconnect. The headset and handset will automatically reconnect when the HX 965 is tuned back on while in range
- The secondary handset need to be connected via selecting HX 965 from the list of devices at Wireless menu

Out range

- If the paired devices are separated by a range of 10 meters (33 feet) or more the headset and handset will disconnect and HX 965 will vibrate to alert
- If vibrate is set to off by sliding the VOLUME switch to the 'position and hold for 2 seconds, HX 965 will not vibrate
- If the headset and handset do not automatically reconnect when they are back within the required range. Briefly press the CALL button on the HX 965 to reconnect manually
- It is possible to use these functions only when your handset supports them. For further information about using these features, please consult your handsets user manual
- While in multi-connection and streaming, the inactive paired device, which is out of range, will be disconnected. The HX 965 will alert once with no attempt to reconnect

Calling

Answering a call /Ending a call

When there is an incoming call, the headset will ring and vibrate
HX 965 will not vibration function is on off

Briefly slide the VOLUME switch to the position to stop the vibration
Briefly press the CALL button

Transferring a call

While on a call on your handset, press the PLAY/PAUSE/STOP button twice on the HX 965 to transfer the audio either from headset to handset or from handset to headset

How to Use

Voice dialling

- Briefly press the CALL button to activate Voice Command
- Note:** If the handset does not support Voice Dialing, it is possible that performing this action will activate Last Number Redial.
- Last number redial**
- Press and hold the CALL button for 1.5 second to activate Last Number Redial the headset will beep. And call the last number dialed
- Call waiting**
- Answer a second call without hanging up the first call by pressing the CALL button for 1 second (you will hear a beep). Press the CALL button for 1 second to turn to the original call
- Briefly press the CALL button to terminate the active calls at once (subject to handset's support)
- Rejecting a Call**
- Press the CALL button for 2 seconds when the handset rings.
- Mic Mute**
- Slide the VOLUME switch to the + position and the FF/REW switch to the REW position at the same time for 1 second to mute/unmute the Mic during conversation

Volume control

- Slide the VOLUME switch to the + or - position

Audio streaming controls

- PLAY** Briefly press the PLAY/PAUSE button
- PAUSE** Briefly press the PLAY/PAUSE button
- STOP** Press and hold the PLAY/PAUSE button
- NEXT SONG** Briefly slide the FF/REW switch to the FF position
- PREVIOUS SONG** Briefly slide the FF/REW switch to the REW position
- FAST FORWARD** Slide and hold the FF/REW switch to the FF position
- REWIND** Slide and hold the FF/REW switch to the REW position

LED Indicator

Function	HX 965	Status	Action
	Power on		The blue LED light flickers 4 times
	Power off		LED light flickers 4 times and then turns off
	Pairing mode		The blue LED light stays on
	Headset/hands-free Profile connected		The blue LED light flickers 1 time every 5 seconds
	Call connected		The blue LED light flickers 1 time every 5 seconds
Charging	Charging complete		The red LED light stays on and changes to violet when charged 80% and above The blue LED light stays on

Troubleshooting

Issue	Possible problem	Resolution
Does not turn on	Check whether the battery of the HX 965 is fully charged	Charge the battery
Unable to communicate with the Wireless Headset HX 965	Check whether the handset supports the headset or Hands-free Wireless profiles	Determine whether your handset supports the headset or hands-free Wireless profiles
	Check whether the battery of the HX 965 is low	Charge the battery
Unable to pair the HX 965 with the Wireless Device	Check and make sure the headset is on.	Slide the Power switch to the ON position to turn on the Headset.
	Check and make sure the headset is placed in pairing mode	With the power off, press the CALL button and slide the Power switch to the ON position at the same time for 1 second to place the headset in Manual Pairing mode
Low sound (speaker)	Check the speaker volume	Increase the volume level

Package Contents

Complete Package contains:

Headset*1

Manual*1

Ears Caps*4

Important safety information

Avoiding hearing damage

Permanent hearing loss may occur if you use your Hands free car kit at a high Volume. Set the volume to a safe level. You can adapt over time to a higher volume of Sound that may sound mormal but can be damaging to tour hearing. If you experience ringing in your ears or muffled speech. Stop listening and have your hearing checked. The louder the volume, the less time is required before your hearing could be affected. Hearing experts suggest that to protect your hearing Limit the amount of time you use Headset at high volume. Avoid turning up the volume to block out noisy surroundings. Turn the volume down if you can't hear people speaking near you. Please refer to your handset user guide for more information on how to adjust listening lefe to your handset.

Using headsets safely

Use of Headset to listen to music while operating a vehicle is not recommended and is illegal in some areas. Be careful and attentive while driving. Stop using this device if you find it disruptive or distracting while operating any type of vehicle or performing any other activity that requires your full attention.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Dear buyer

Thanks a lot for your support. We would like to do harder to supply you with better service. Every cooperation with you is deeply cherished by us, since we do run this shop with strong sincerity. Please contact us any time when you have any doubts or suggestion about this product. We are happy to try best to satisfy you!

If you feel good at our products, your favorable comment would be the best motivation and reward for us.

May you have a happy day!



Made in China