

Introduction

E20, a pair of truly wireless smart earphones. Its innovative lightweight design and best in class technology gives you freedom and comfort to listen to your tracks for hours. Communicate or listen to music up to 2.5 hours with the built-in wireless Bluetooth microphone. With capacity 420mAh battery of portable charging case, fully charged for 1 hours. Earphones can be charged five times for use a full day.

Packaging Contents

- EarBuds
- Charging Case
- User Guide
- 2Pcs Small Eartips
- 2Pcs Large Eartips

Specifications

- Model Name: E20 Bluetooth Version:5.0
- Charging Case Input: 5V 500mA
- Charging Case Output: 5V 40mA*2
- Earphones Charging Time: *1 hours
- Playing Time: *2.5 hours
- Battery Capacity: Earbud 40mAh/pcs, Charging case 420mAh
- Weight: Earbud *4.5g/pcs, Charging case *63g


*The actual data will be different from the product or other factors.

1

Features

- **True Wireless:** Earphones without any cable hanging on your neck. It's the most technically advanced earphones with superior sound.
- **Ergonomic Design:** For secure and comfort wear, the shape of the earbuds is carefully designed according to ear geometry.
- **Safety Design:** You can listen to the sound of the surrounding environment while crossing the street by triple-click left or right function key.
- **With 420mAh Battery Capacity:** The E20 portable charging case equipped with 420mAh battery capacity which can charge the earbud.
- **Audio Evolved:** Experience acoustic bliss with wirelessly streamed audio that lets you feel every note of your music when you hear it.
- **Long Battery Life:** Built-in rechargeable lithium polymer battery, it supports up to 2.5 hours playing/ talk time.
- **Compatibility:** The E20 is compatible with Android, iOS and other Bluetooth-enabled devices.

Appearance & Interface Description

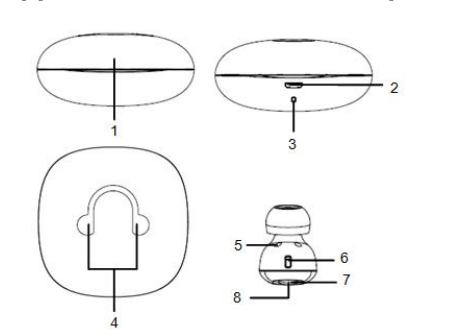

1. Press type switch
2. USB Charging Port
3. Charging Case LED Indicator
4. Ear Bud Charging State Viewport
5. Charging Connector
6. Mic
7. Ear Bud LED Indicator
8. Multi-function Button

3

Operation Instructions

- 1. Switching E20 On/Off**
 - To turn on E20, press and hold the Multi-function Button on both earpieces for about 3 seconds until the Blue LED starts flashing.
 - To turn off E20 manually, press and hold the Multi-function Button for about 4 seconds.
 - The earpieces turn off automatically when placed in the charging box.
 - The earpieces turn off automatically unconnected devices beyond 5mins.
 - 2. Pairing E20**
 - Before connecting E20 to your device, make sure that E20 is in pairing mode.
 - When using the E20 for the first time, the left and right earphones have been paired successfully by factory default.
 - Open the lid, take earpieces out of charging case.
 - (1) Press and hold on the LEFT earphone for 3 seconds until the LED light on.
 - (2) Press and hold on the RIGHT earphone for 3 seconds until the LED light on.
 - (3) Wait about 8 seconds until the LEFT earphone LED flashes Red and Blue, and the RIGHT earphone LED flashes Blue to indicate that the earpieces have entered pairing mode.
 - (4) Activate Bluetooth on your phone, search & select E20 pairing.Both earpieces LED flashes Blue when connecting successful.
- *Note:**
*Only one E20 displays in your mobile Bluetooth device list when the earphones in pairing mode.
*There will be two E20 displayed in your mobile Bluetooth if the pairing is unsuccessful, please restore to factory settings.

4

3. Call Function

- Answering a Call: Press the Multi-function Button on the left earpiece once to answer an incoming call.
- Ending a Call: Press the Multi-function Button on the left earpiece once to end an ongoing call.

4. Charging Earphones & Charging Case

- To charge the charging case
 - (1) Plug one end of the charging cable into charging case charging input and the other end into a USB Power Adapter.
 - (2) The blue LED turns on and start flashing to indicate that the charging case is charging. Once completely charged all of the blue LED would turn on.
- To charge the earphones
 - (1) Place the earpieces into the charging case to charge the earpieces.
 - (2) The earphones LED flashed red to indicate that the earphones is charging normally and will turn off once fully charged.

5. Music Function:

- **Pause / Play:** When playing music, simply press the left or right function key once.
- **Next Song:** When playing music, press left or right function key twice.

6. Environmental Sound Function:


- **Turn On/Off :** Triple-click the left or right function key to turn on/off after your earbuds well connected with the devices.

5

7. Restore Factory Settings

- (1) Place the LEFT and RIGHT earphones back in the charging case to make sure that earphones was fully charged.
- (2) Delete all "E20" paired from your mobile Bluetooth device list and turn off the Bluetooth function.
- (3) Take the LEFT earphone from charging case, press and hold on the earphone for 8 seconds until the LED flashes Red and Blue;
- (4) Take the RIGHT earphone from Charging case, press and hold on the earphone for 8 seconds until the LED flashes Red and Blue.
- (5) Let the LEFT and RIGHT earphone close(less than 5cm) about 30 seconds later, the LEFT earphone LED flashes Red and Blue, and the RIGHT earphone LED flashes Blue, the earphones enter pairing mode.
- (6) Re-activate Bluetooth on your phone, search & select E20 pairing.Both earpieces LED flashes Blue when connecting successful.

8. How to wear your Earphones

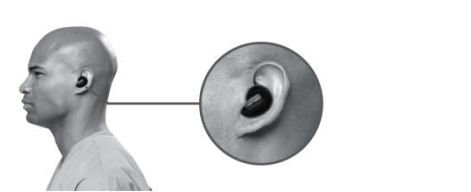

6


Precautions

- Please read all safety instructions and warnings thoroughly before using this product. Improper use of this product may result in damage to this or attached products.
1. Do not disassemble the product or attempt to fix it.
 2. Do not attempt to replace any part of this product or battery inside.
 3. Do not crush, puncture, dispose of in fire, short the contacts or expose the product to water or other liquids.
 4. Do not store or use the product in a high-temperature environment, including intense sunlight or heat.
 5. Avoid drops, bumps, abrasions and impacts.
 6. If there is any reason to believe that there is damage to the product, discontinue use immediately.
 7. If you find that the product is too hot, is emitting an odour, or is deformed, punctured or exhibits any suspicious or abnormal behaviour, discontinue use immediately and contact our customer service.
 8. Always charge this product before extended storage.

7

MELODY E20

USER MANUAL



FCC STATEMENT :

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.