


Aroma Diffuser

BK-EG-FD28

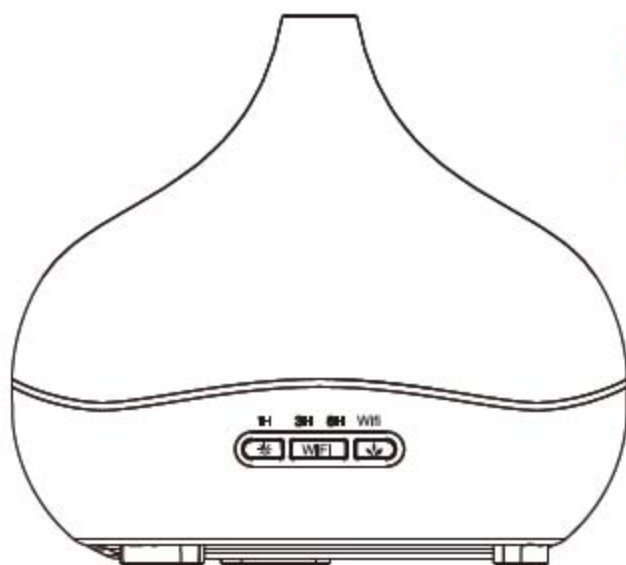

 COMPATIBLE WITH
amazon alexa

 Google Home


IFTTT



Thank you for purchasing RENPHO Smart Essential Oil Diffuser,
please read this instruction carefully before operating.

GETTING TO KNOW THE DEVICE

RENPHO Essential Oil Diffuser uses ultrasonic waves to instantly vaporize water and essential oil in the tank, to produce a cool, dry fragrant mist.

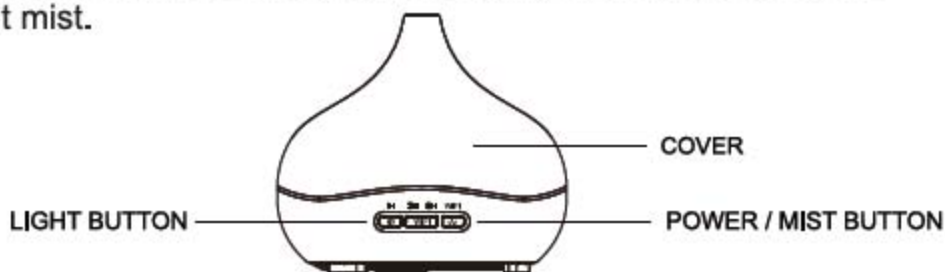

BUTTONS FUNCTION

POWER / MIST Button

This button toggles among 1H/3H/6H/OFF. The default timer is 1H. Press once turn on the mist and it is 1H default timer, press again it's 3H, 6H timer and mist off in turn. Long press to change the mist output volume Strong/Light

LIGHT Button

Short press to turn on/change LED color. Long press to turn off LED. 7 different colors, each with 2 brightness levels.

Connect to WIFI button (see mobile app section of this guide)

INDICATOR LIGHTS

1H	1 hour auto off Timer
3H	3 hours auto off Timer
6H	6 hours auto off Timer
WIFI	Quick flashing twice per second: automatic network connecting mode and ready to connect to the APP
	Always bright: successfully connect to WiFi (working)
	Not bright: failed to connect to WiFi (not working)
	Slowly flashing once 2 seconds: AP mode(use when WiFi is weak); ready to connect to the APP

OPERATION

1. Keep product upright and remove the cover vertically. Fig1
2. Connect the AC adapter to the power input on the base of the unit. Fig2
3. Using the measuring cup, carefully add cool water to the reservoir. Do not exceed the maximum level. Do not add water while the diffuser is in operation. Add desired essential oils to the water tank. Fig3
4. Replace top cover. Rotate the cover to adjust the direction of the vapor. Note the cover must be in place while the diffuser is in operation. Fig4
5. Plug the diffuser into an outlet.



Fig1



Fig2



Fig3



Fig4



Fig5




Fig6

6. Press Power button to begin operation. You can cycle through 1H/3H/6H auto shutoff. Long press the Power button to choose between Strong (one beep) and Light (two beeps) mist amount. To turn diffuser off, press Power button to cycle through timer settings until off.
7. Short press LED button to turn on/change LED color. Long press to turn off LED indicator light Fig 6.
8. The diffuser will automatically shut off if water level becomes too low.

ACCIDENTAL LEAKAGE

In the event of the unit being knocked over or tipped during use, please follow the steps as below to avoid malfunction:

1. Unplug the unit and remove the cover.
2. Pour out any remaining water from the water tank.
3. Shake the unit gently to drain water and then allow it to air-dry for at least 24 hours.

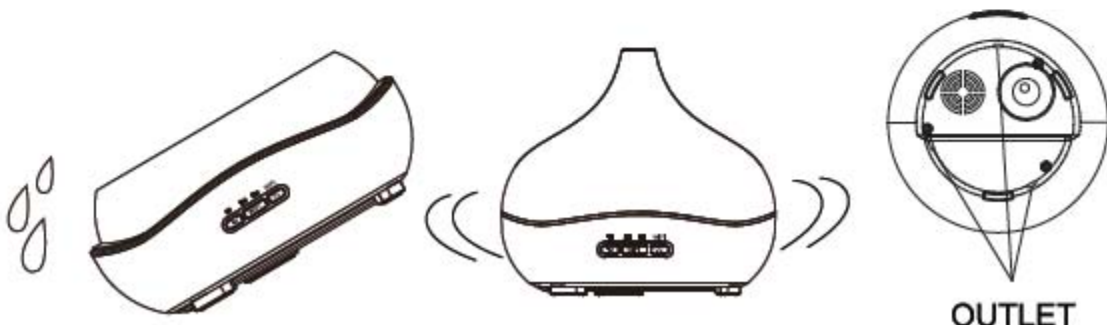

MAINTENANCE

After using 5-6 times, or 3-5 days, please clean the product as follow:

1. Unplug the unit from power supply and remove the cover.
2. Pour out any remaining water from the tank.
3. Add a small amount of warm dish detergent, and wipe it gently, then use cleaning cloth to dry it gently.
4. Pour water away from the air outlet as illustrated in the right-hand picture below.
5. Do not use other acids or enzymes detergents, as this may give off hazardous gas or cause malfunction.
6. If the diffuser is not used for an extended period, drain water from the reservoir and allow to dry. Before using, clean the reservoir with a mild detergent.

Note: Be sure to use a mild detergent.



DOWNLOAD APP

Search and download "RENPHO Smart" App from Apple App Store/Google Play
Or Scan QR Code below and follow the instruction to download APP.

NOTE: For iPad download, please choose filters-support-iPhone only.



RENPHO Smart




iOS/Android



REGISTER ACCOUNT

1. Tap "Login" to the new page.
2. Add Devices, tap "Confirm indicator rapidly blink" after indicator light flashes.
 - A. Automatic Network Connecting Mode: The device's WIFI indicator light rapidly flashes 2 times per second. This is the normal mode to connect device with WIFI.
 - B. AP Mode: When the WIFI's signal is weak that automatic network connecting mode doesn't work. You can choose AP MODE to connect the device with WIFI.


3. Select Wi-Fi device for network connection

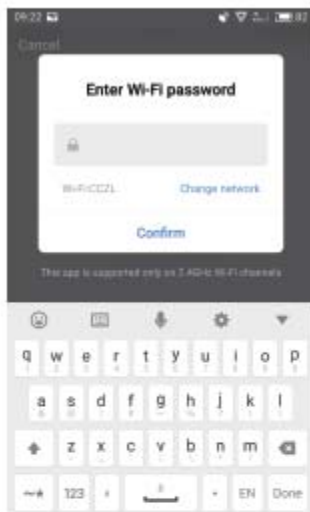

Important Notice: This device can support only for 2.4Ghz WiFi channel. If your mobile phone connects with 5Ghz network, please change it to 2.4Ghz (Setting—WLAN—choose 2.4G network)


NOTES: ADD DEVICE - ADDING FAILED

1. If the APP interface is shown as in the picture to the right, it means that the network connection failed.
2. If the APP control doesn't work suddenly. Please try by connecting again (Delete previous data by long pressing 5 seconds on the WIFI button firstly) / view help / Contact Seller by support@renpho.com

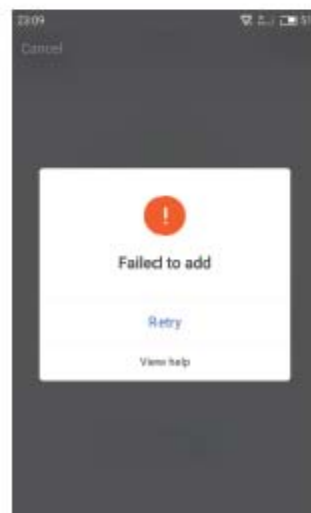

MANAGE YOUR ACCOUNT

1. Go to "Profile" page to edit your personal information.

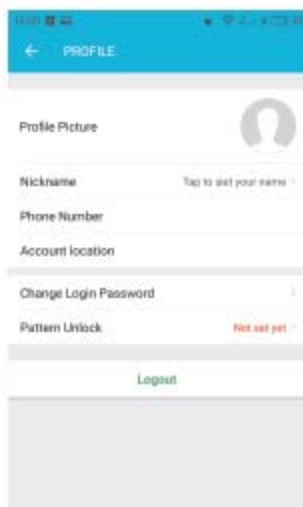

2. Device Sharing

If you have connected the device and others also want to connect it. They cannot connect directly with the device. Other mobile phone need to install the RENPHO Smart APP and register their own account. Then the first user who connected the device can go to this page to add other users.



HOW TO WORK WITH ALEXA

Amazon Certified



works with
amazon alexa



Control this product with your voice
through select Alexa devices.

Search and enable "Smart life" skill in your Amazon Alexa APP.

The mobile number/E-mail register for Smart life account should be the same as RENPHO Smart APP. After login it will discover devices, please make sure you open the device before search.

Important Notes:

1. Voice control supports MIST ON/OFF and LED light ON/OFF/Color Changing and brightness Changing ONLY.
2. Once you revise the name of the diffuser in RENPHO Smart APP, Alexa won't be able to find the device by the revised name, please search for the device again in Amazon Alexa APP.

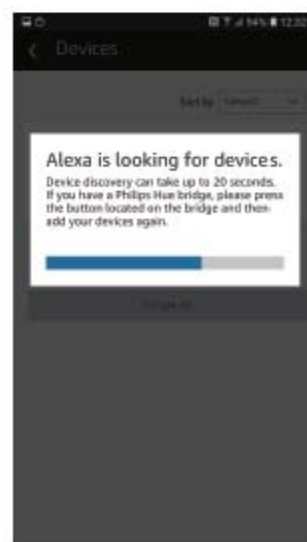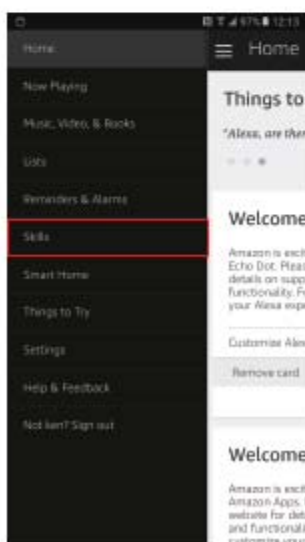

HOW TO WORK WITH GOOGLE ASSISTANT



works with
Google Assistant




Control this product with your voice
through Google Home.

Search and link "Smart life" in your Google Home APP.

The mobile number/E-mail register for Smart life account should be the same as RENPHO Smart APP. After login and authorize it will discover devices, please make sure you open the device before search.

Important Notes:

1. Voice control supports MIST ON/OFF and LED light ON/OFF/Color and brightness Changing ONLY.
2. Once you revise the name of the diffuser in RENPHO Smart APP, Google Assistant won't be able to find the device by the revised name, please search for the device again in Google Home.

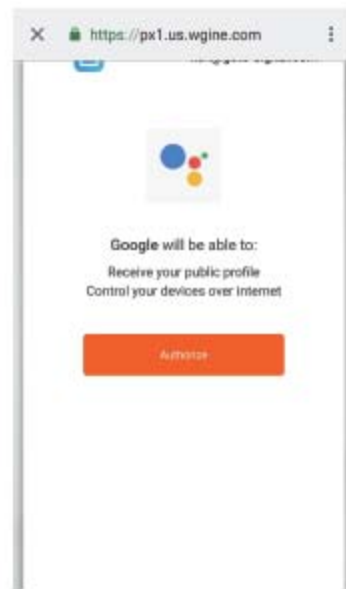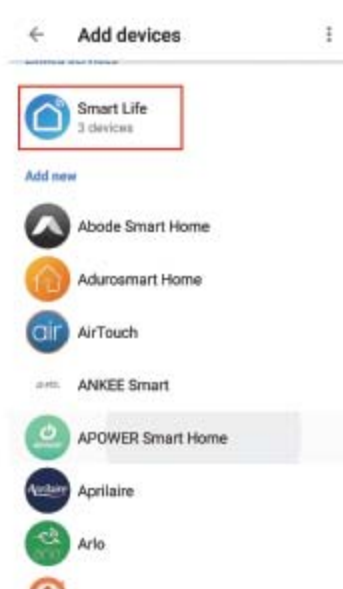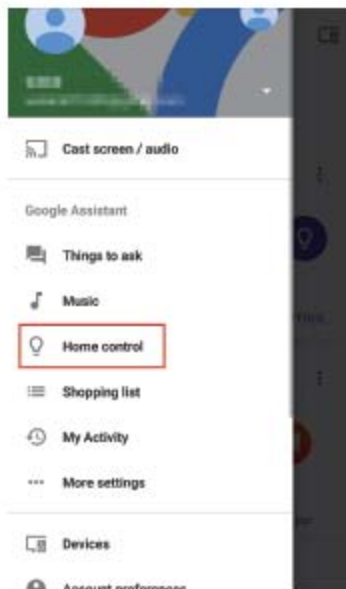

Works with
IFTTT

Furthermore, RENPHO essential oil diffuser also works with **IFTTT**, which allows maximum convenience.

SPECIFICATIONS

Dimensions	Approx 168.5 x 142MM
Weigh(excluding adaptor)	Approx 400g
Power: Input/Output	AC100-240V 50-60HZ/ DC 24V 600MA
Length of charger cord	Approx 170CM
Electric consumption	Approx 14W
Time Mode	1H/3H/6H/ON
Tank Capacity	300ML
Materials	PP/ABS/PC
Accessories	AC Adapter, Measuring cup, User manual
Method of mist production	2.4MHZ



CUSTOMER SERVICE AND WARRANTY

We are dedicated to ensuring your 100% satisfaction. We provide our customers 12-month worry-free guarantee.

Please feel free to contact us at support@renpho.com with your Amazon order #.

We will always try our best to reply within 24 hours of customer emails.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any

interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses

instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause

harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of

the following measures:

-- Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

The distance between user and products should be no less than 20cm

ADDRESS:

JOICOM CORPORATION
13280 EAGLEBLUFF LN
EASTVALE, CA 92880
United States

US Customer Service Phone:

1(844)417-0149 M-F 9:00-17:00(PST)

UK Customer Service Phone:

44-749-186-7344 M-F 10:00-17:00(GMT)