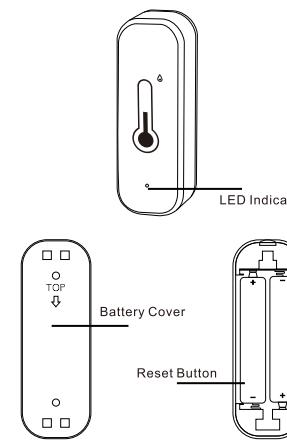


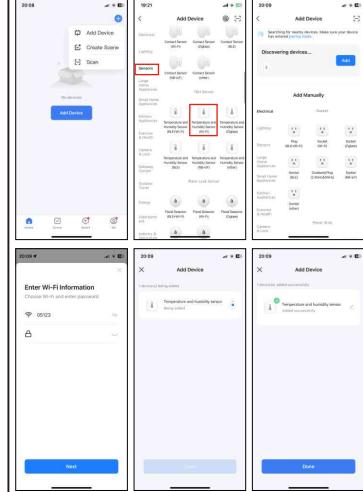



48*72mm 105g铜版纸 6折页

<p>Temperature & Humidity Sensor USER MANUAL</p> 	<p>Product Presentation:</p>  <p>LED Indicator</p> <p>Battery Cover</p> <p>Reset Button</p>	<p>Specification</p> <p>Size: 70*25*20mm</p> <p>Battery: LRO3-1.5V/AAA*2 (Alkaline battery)</p> <p>Wireless Type: WiFi(2.4GHz)</p> <p>Wi-Fi Protocol: 2.4GHz</p> <p>Wi-Fi Standard: IEEE 802.11 b/g/n</p> <p>Temperature Measure Range: -20°C-60°C</p> <p>Temperature Accuracy: ±1°C</p> <p>Humidity Measure Range: 0% RH~100% RH</p> <p>Humidity Accuracy: ±5%</p> <p>RH Working humidity: Max 95%RH</p> <p>Low power and low voltage: <2.2V</p>	<p>How to use:</p> <p>Slide to open the back cover of battery compartment, take out the insulation sheet.</p>  <p>(Notes: when batteries are run out, please choose Alkaline battery instead of Carbon-zinc battery.)</p>	<p>e. If the numbers of devices connected to WiFi router reach the limit, you can try to disable a device to vacate the channel or try with another WiFi router.</p> <p>How to set up:</p> <ol style="list-style-type: none"> Use your smartphone to scan QR code, or search "Smart Life" app in Google Play Store or APP Store to download and install. Create an account with your mobile number and authentication code. Connect your mobile to your WiFi router, open the back cover, remove the insulation sheet, click "+" at the upper right corner of homepage or click "Add Device".    	
<p>Installation</p> <ol style="list-style-type: none"> Use a clean and dry towel to clean the area where you want to mount the sensor. Tear off the adhesive tape to place the sensor where you want, press hard for about 10s to fix it well. (The adhesive tape is for one-time use only.)  <p>NOTES: The sensor is only used in indoor and not water-proof.</p>	<p>Functions</p> <ol style="list-style-type: none"> Accurate Measurement About 30 minutes after WiFi configuration, the temperature and humidity is closer to the actual ambient environment, so the readings are more accurate. And please keep the sensor away from any heat sources. Intelligent Linkage When the ambient environment changes, you can execute intelligent linkage. For example, when the room temperature exceeds 35°C, the air-conditioner will turn on automatically, or when the humidity is lower than 20%RH, the humidifier will spray. Temp & humidity Alert You can preset the range of temperature and humidity in the "Scene", when the temperature and humidity reaches the range, it will push alert message via app. 	<p>FCC Warning</p> <p>This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:</p> <ol style="list-style-type: none"> (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. <p>NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"> - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help. <p>NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p>The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.</p>	<p>OK Google, what is the <device> humidity ? OK Google, what is the <device> temperature ?</p> <p>Alexa, what is the <device> humidity ? Alexa, what is the temperature of <device name> ?</p>	<p>FAQ</p> <p>Q1: What should I do if I can't configure the smart device?</p> <ol style="list-style-type: none"> Please check whether device is powered on. Make sure your mobile and switch module are under the same 2.4GHz WiFi network. Whether it's in good internet conditions. Make sure the password entered in App is correct. Make sure the wiring is correct. <p>Q2: What device can be connected to this WiFi smart device?</p> <p>Most of your household electrical appliances can be, such as lamps, laundry machine, coffee maker etc.</p> <p>Q3: What happens if the WiFi goes off?</p> <p>You can still control the device connected to the smart device with your traditional switch and once WiFi is active again the device will connect automatically to your WiFi network.</p>	<p>Warranty</p> <p>The product carries a one-year warranty from purchase date. Please feel free to contact us when you have any product problem or suggestions. We take care of all quality-related issues with a REPLACEMENT OR FULL REFUND.</p> <p>     </p> <p>Made in China</p>