



FG-BM308 Wireless Stereo Bluetooth Speaker User Manual


I. 產品簡介 BM308 Overview

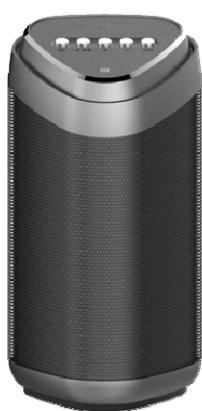

正面 Front view

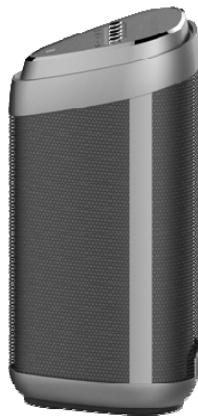

側面 Side view

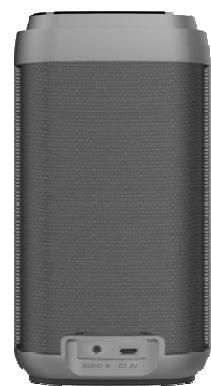

背面 Back view



操作面板 Top view

II. 操作面板功能 Button operation

Button	Operation	Function
	短按 1 次 (關機) Press 1 time (Power off)	電源開啟並啟動藍牙配對模式 Power on and device paring
	短按 1 次 Press 1 time (Power on)	中斷藍牙配對設備 Disconnecting Bluetooth device Power on and Bluetooth device paring
	長按 2 秒 Press and Hold 2 sec (Power on)	電源關閉 Power off
	短按 1 次 Press 1 time	音樂撥放/暫停 Music play / pause
	短按 1 次 (來電時) Press 1 time (phone calls)	來電接聽/掛斷 Answer calls / hand up
	短按 2 次 Press 2 times	重撥上一次撥出電話 Redial
	長按 2 秒 Press and Hold 2 sec	拒接來電 Reject calls

	(phone calls)	
	長按 8 秒 Press and Hold 8 sec (Power on)	恢復原廠設定值，清除藍牙設備信息 Reset, Restore to original settings
—	短按 1 次 Press 1 time	音量減低 Volume down
	長按 2 秒 Press and Hold 2 sec	上一曲 Previous track
+	短按 1 次 Press 1 time	音量加大 Volume up
	長按 2 秒 Press and Hold 2 sec	下一曲 Next track
🔗	短按 1 次 Press 1 time	TWS 音箱相互連線 TWS connection
	長按 2 秒 Press and Hold 2 sec	啟動手機語音助理 Wake up Siri / Google assistant
NFC	無。 NFC 手機感應 None, NFC mobile sensor	電源啟動及藍牙配對 Power on and device paring

III. LED 指示燈 LED Indicator

1 白燈	2 藍燈	3 綠燈	4 紅燈
電源開啟 Power on	藍牙連線配對 Bluetooth connecting	音訊線輸入 Aux-in	充電中，充電完成熄滅 Charging

IV. 藍牙配對連線 Paring BM308 and the Bluetooth device

Mode 1 :

- 短按 1 下 BM308 電源按鍵，指示燈會出現白燈 3 秒，並同時啟動藍牙連線。(語音提示：Bluetooth Source) 指示燈改為藍燈閃爍

Shot press 1 time power button; LED indicator flashes white light 3 sec and start up Bluetooth paring function, (Voice prompt: Bluetooth Source) , the Blue light flash)

- 開啟手機的藍牙功能，在設備列表裡選擇「BM308」進行配對

Turn on the Bluetooth of the mobile phone/devices, and select “BM308” from the Bluetooth device list.

- 聽到「嘟」1 聲提示音(或手機上方出現圖示)，即配對完成 (藍色指示燈長亮)

The Paring completed when hearing the prompt sound “doo~”; and the Blue indicator light is on.

Mode 2 : If you're mobile with NFC function:

- 開啟手機 NFC 功能，直接感應 BM308 面板

Turn on mobile NFC function, direct inducts BM308 dashboard.

- 當手機上出現：「是否連線 BM308」之文字訊息，點選「是」，即可完成開機及配對完成

When you're mobile shows ‘connecting BM308’ message, click “yes”, BM308 will auto power on

and paring completed.

V. TWS mode

1. 將二台 BM308 開啟電源

Turn on 2 sets of BM308

2. 短按一下，任一台的  TWS 連線按鈕進行連線。(指示燈：藍燈亮，白燈閃爍)

Selected any one of BM308, and shot press 1 time  TWS button to paring each other.

3. 聽到語音回覆，會自動分為 R/L 音箱，即配對成功，享受立體聲模式

When you hear voice prompt, BM308 will auto divided into R/L channels, and completed TWS mode.

註：TWS 立體聲模式下，關閉任一台之電源，二台即會同時關閉。

NOTE: In the TWS stereo mode, when you tune off any one of BM308, both them will all tune off.

VI. 音訊輸入 Aux-in mode

BM308 配置有 Aux-in 音訊輸入孔，可直接接線連接音樂裝置。(指示燈：綠燈亮)

BM308 with Aux-in function, you can directly use audio cable input. (LED indicator: Green light is on)

註：Aux-in 模式下，麥克風將無法作用

NOTE: In the Aux-in mode, the micro phone is not work.

VII. 產品規格 Product Spec

藍牙版本 Bluetooth Version	Bluetooth 5.0
藍牙規範 Bluetooth Profiles	A2DP, AVRCP, HFP, HSP
連線距離 Connecting Distance	10m
喇叭單體尺寸 Driver Unit	60 mm dynamic & 3 passive-radiators
靈敏度 Sensitivity	98 dB@1KHz
頻率響應 Frequency Response	20~20KHz
電池容量 Battery Capacity	900 mAh
使用時間 Play Time	10 hours
充電時間 Charging Time	2.5 hours (full charge)*
麥克風 Microphone	-42dB±3dB
尺寸 Dimension	93 x 90 x 180 mm
重量 Weight	480g

*充電時數可能視使用情況而有所不同。

*Charging time may vary depending on the way to use.

*若長時間未使用本機，充電電池可能無法維持足夠電量。請於 3~6 個月至少充電一次，避免過度放電以適當地維持電量。

*If the headset is not charged for a long time, the Li-ion battery may not be able to preserve the most effective operation. Please fully charge the headset and the charging case once at least every 3 to 6 months to avoid the batteries over discharge that affects the power consumption efficiency.

VIII. 隨附物品 In the box

BM308 Wireless Bluetooth Speaker x 1

Micro-USB Charging Cable x 1

User Manual

IX. 安全須知 Safety Information

為了您自身和個人財產的安全，請仔細閱讀本項目

Please read these safety warnings and cautions carefully to ensure your personal safety and prevent property damage.

1. Fire and Electric Shock Hazard

- A. Do not drop, disassemble, open, crush, bend, deform, puncture, shred, microwave, incinerate, paint, or insert foreign objects in to the headset.
- B. Clean the headset only with a dry cloth.
- C. Do not expose your headset to extremely high or low temperatures.
- D. Do not leave your headset in direct sunlight for extended periods of time.
- E. Do not leave your headset near open flames such as cooking burners, candles, or fireplaces.
- F. Do not block ventilation openings.

2. Caution

- A. BM308 is designed water resistant only. Please do not place BM308 into the water or it may cause electronic damage.
- B. Do not use abrasive cleaners to clean your BM308 because this could cause scratches or damage.
- C. Do not leave your BM308 to contact with any sharp objects because this could cause scratches and damage.
- D. Do not insert anything into your headset unless otherwise specified in this User Manual. This may damage the internal components.
- E. Do not attempt to repair, modify, or disassemble your BM308 yourself.
- F. Do not attempt to replace the battery of BM308. It is built-in and not changeable by users.
- G. Use only the USB charging cable supplied in the accessories package to charge BM308.
- H. Observe all signs and displays that require an electrical device or RF radio products to be switched off in designated areas.

X. FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

XI. CE STATEMENT

This product is compliant with the CE directive.