

Smart Sports Bracelet

Instruction Manual



Lead a Healthy Life

Pre-use Notes

1. The company reserves rights to modify the instruction manual without any further notification. Some functions may be different in specific software versions, which is normal;
2. Please charge the product for 2 hours prior to your use;
3. Download the mobile APP that is used to connect to bracelet before your use. The APP can synchronize time and allow you to set personal information. For detailed information, please refer to the subsequent instructions involving software synchronization;
4. Keep away from hot water, tea water and any other corrosive liquid. Although it is IP67 waterproof, it isn't suitable for diving (> 2m), which may lead to water inflow. Any damage incurred by the above-mentioned issues won't be covered by the product quality warranty and free maintenance scope;
5. The product only serves as electric detection function. All data is for daily reference, but not medical use;
6. Keep a proper tightness between bracelet and your arm; too tight or loose may lead to inaccurate measurement. If it is wore too tight or too loose, blood flow and sensor detection may be separately affected;
7. Avoid to crash into hard items, which may break its glass.

Special Notes

1. iOS: If it isn't used for more than 2 hours ($\geq 2h$), in standby or sleep state (the mobile phone isn't used for a long time and its display is off), WillWatch2 will be removed by iOS system. At this time, the APP is disconnected with the bracelet, making the APP fail to use. Open the APP again, then it will automatically connect to the bracelet;
2. Android: Enable permissions of the APP on mobile settings after a successful APP installation. Each mobile phone is different and we take Huawei as an example: settings - APP - enable APP management - WillWatch2. Find the APP - change automatic management to manual management - enable all permissions (enable self-starting, association start-up and background activity). This work is only used to keep the connection between the mobile phone and bracelet Bluetooth when the mobile phone is in standby state (its display is off), but not be removed by Android system. In addition, no data flow and mobile electricity will be used.

Recommended Systems

- Support 5.1 operating system and more advanced systems
- Support 10.0 operating system and more advanced systems


How to Connect

Use browser to scan and download the APP (data flow is required). Enable the corresponding permissions which are important for Bluetooth connection during APP downloading and installation. You can also scan the QR code on the bracelet end to download the APP.



WILLWATCH2


1. Open mobile "settings", click and open Bluetooth;

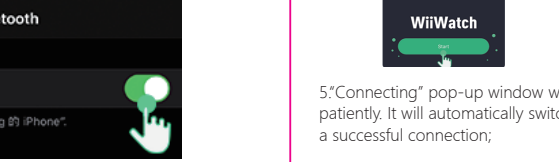


2. Open the bracelet. Slide left to enter the bracelet main interface and slide up until "pairing" is found;




3. Click "pair" to enter the relevant instruction page, then slide up to the QR code interface of "Bind the App";

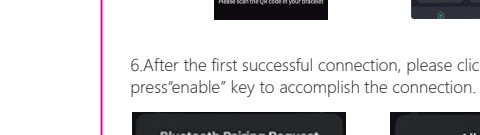


4. Open the APP - click "start" - enter the connection interface - use the mobile phone to scan the QR code to connect;

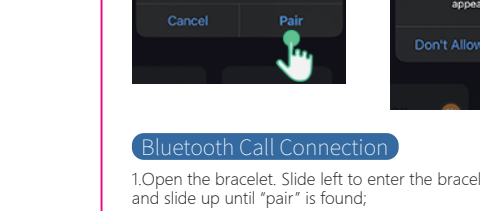

5. "Connecting" pop-up window will occur at this time. Please wait patiently. It will automatically switch to the APP home page after a successful connection;


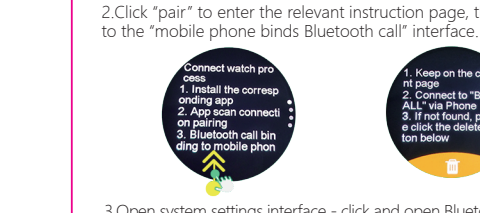


6. After the first successful connection, please click "pair" key, then press "enable" key to accomplish the connection.




Bluetooth Call Connection


1. Open the bracelet. Slide left to enter the bracelet main interface and slide up until "pair" is found;

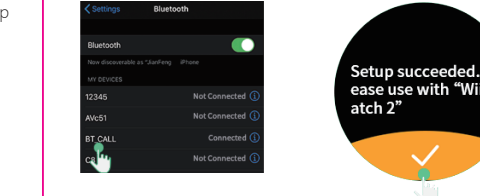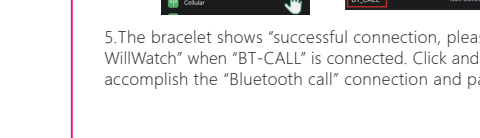


3. Open system settings interface - click and open Bluetooth - search Bluetooth devices until "BT-CALL" is found;

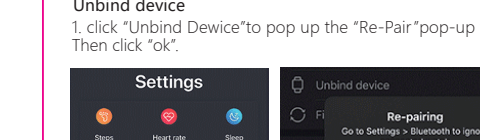


4. After searching, click "BT-CALL" to pair and wait for a successful pairing;

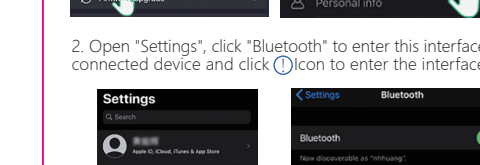


5. The bracelet shows "successful connection, please work with WillWatch" when "BT-CALL" is connected. Click and tick the icon accomplish the "Bluetooth call" connection and pairing.

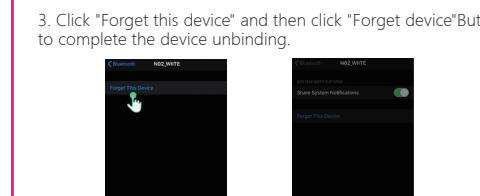


3. Open system settings interface - click and open Bluetooth - search Bluetooth devices until "BT-CALL" is found;

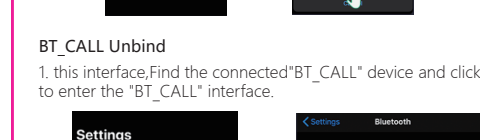


4. After searching, click "BT-CALL" to pair and wait for a successful pairing;

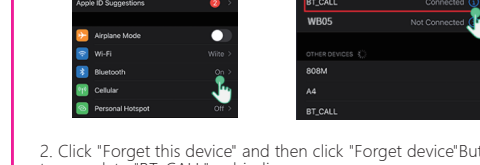

5. The bracelet shows "successful connection, please work with WillWatch" when "BT-CALL" is connected. Click and tick the icon accomplish the "Bluetooth call" connection and pairing.


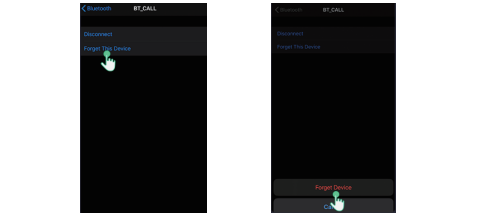


6. After the first successful connection, please click "pair" key, then press "enable" key to accomplish the connection.




Bluetooth Call Connection


1. Open the bracelet. Slide left to enter the bracelet main interface and slide up until "pair" is found;

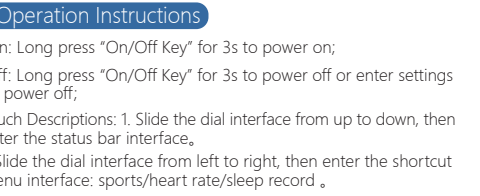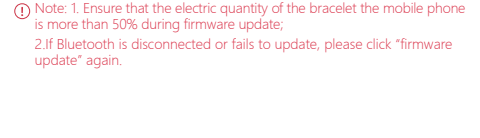


3. Open system settings interface - click and open Bluetooth - search Bluetooth devices until "BT-CALL" is found;

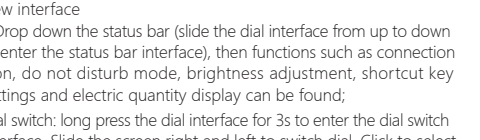


4. After searching, click "BT-CALL" to pair and wait for a successful pairing;

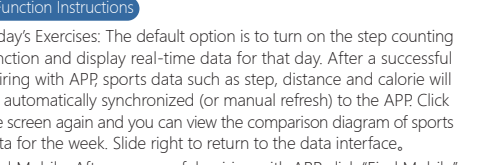


5. The bracelet shows "successful connection, please work with WillWatch" when "BT-CALL" is connected. Click and tick the icon accomplish the "Bluetooth call" connection and pairing.

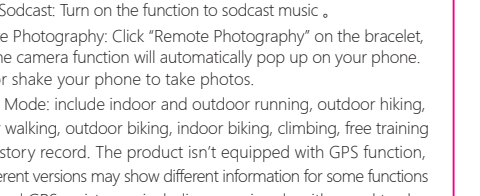


3. Open system settings interface - click and open Bluetooth - search Bluetooth devices until "BT-CALL" is found;

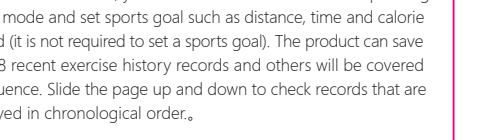


4. After searching, click "BT-CALL" to pair and wait for a successful pairing;

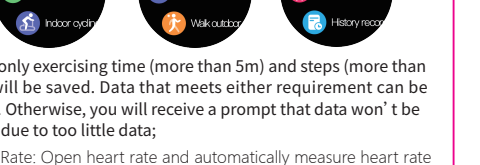


5. The bracelet shows "successful connection, please work with WillWatch" when "BT-CALL" is connected. Click and tick the icon accomplish the "Bluetooth call" connection and pairing.

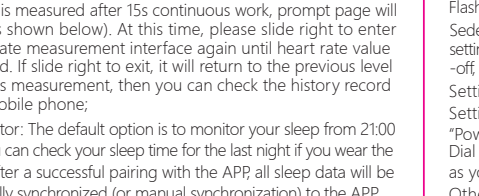


3. Open system settings interface - click and open Bluetooth - search Bluetooth devices until "BT-CALL" is found;

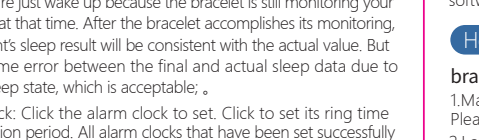


4. After searching, click "BT-CALL" to pair and wait for a successful pairing;

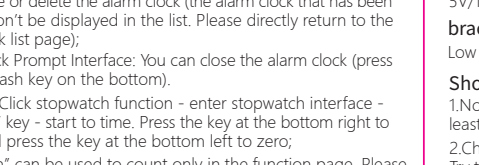


5. The bracelet shows "successful connection, please work with WillWatch" when "BT-CALL" is connected. Click and tick the icon accomplish the "Bluetooth call" connection and pairing.

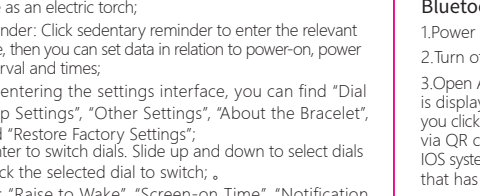


3. Open system settings interface - click and open Bluetooth - search Bluetooth devices until "BT-CALL" is found;

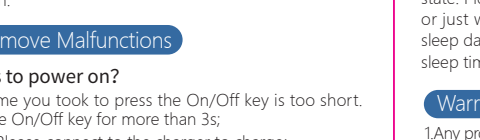


4. After searching, click "BT-CALL" to pair and wait for a successful pairing;

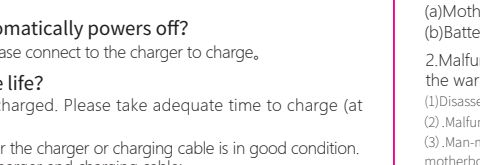


5. The bracelet shows "successful connection, please work with WillWatch" when "BT-CALL" is connected. Click and tick the icon accomplish the "Bluetooth call" connection and pairing.

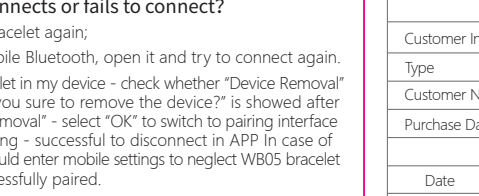

3. Open system settings interface - click and open Bluetooth - search Bluetooth devices until "BT-CALL" is found;

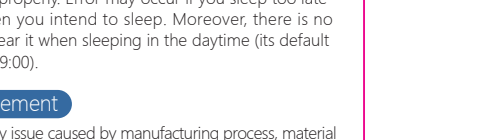

4. After searching, click "BT-CALL" to pair and wait for a successful pairing;

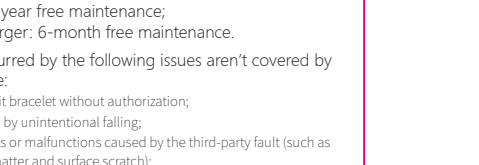

5. The bracelet shows "successful connection, please work with WillWatch" when "BT-CALL" is connected. Click and tick the icon accomplish the "Bluetooth call" connection and pairing.



Warranty Card		
	Seller	
	Tel	
Abstract		
Malfunction	Overhaul	Remarks

Bluetooth disconnects or fails to connect?

1. Power on your bracelet again;
2. Turn off your mobile Bluetooth, open it and try to connect again.
3. Open APP - bracelet in my device - check whether "Device Removal" is displayed - "Are you sure to remove the device?" is showed after you click "Device Removal" - select "OK" to switch to pairing interface via QR code scanning - successful to disconnect in APP In case of iOS system, you should enter mobile settings to neglect WB05 bracelet that has been successfully paired.

Inaccurate sleep data?

Sleep monitor means simulating your natural sleep and wake-up state. Please use it properly. Error may occur if you sleep too late or just wear it when you intend to sleep. Moreover, there is no sleep data if you wear it when sleeping in the daytime (its default sleep time is 21:00-9:00).

Warranty Statement

1. Any product quality issue caused by manufacturing process, material and design is covered by the warranty scope under the premise that the product is used properly. From the date of your purchase, you can enjoy the following free maintenance services:
(a) Motherboard: 1-year free maintenance;
(b) Battery and charger: 6-month free maintenance.
2. Malfunctions incurred by the following issues aren't covered by the warranty scope:
(1) Disassemble and refit bracelet without authorization;
(2) Malfunction caused by unintentional falling;
(3) Man-made damages or malfunctions caused by the third-party fault (such as motherboard inflow, shatter and surface scratch);
3. Please send the product to our company or the dealer if repair is required;
4. In terms of its functions, please be subject to the real object you received.

Short service life?

1. Not be fully charged. Please take adequate time to charge (at least 2h);
2. Check whether the charger or charging cable is in good condition. Try to change charger and charging cable;
3. Check whether the charging cable port is connected well, then try again.

Function Instructions

Today's Exercises: The default option is to turn on the step counting function and display real-time data for that day. After a successful pairing with APP, sports data such as step, distance and calorie will be automatically synchronized (or manual refresh) to the APP. Click the screen again and you can view the comparison diagram of sports data for the week. Slide right to return to the data interface.

Find Mobile: After a successful pairing with APP, click "Find Mobile" in the bracelet. "Find Mobile" interface will be popped up and your mobile phone vibrates and rings.

Music Control: Open the mobile music player, then use the bracelet to synchronize and update .

Music Sodcast: Turn on the function to sodcast music .

Remote Photography: Click "Remote Photography" on the bracelet, then the camera function will automatically pop up on your phone. Click or shake your phone to take photos.

Sports Mode: include indoor and outdoor running, outdoor hiking, indoor walking, outdoor biking, indoor biking, climbing, free training and history record. The product isn't equipped with GPS function, so different versions may show different information for some functions that need GPS assistance, including exercise algorithm and track. Please click the corresponding sports icon according to its actual functions. What's more, you are allowed to enter the corresponding sports mode and set sports goal such as distance, time and calorie burned (it is not required to set a sports goal). The product can save up to 8 recent exercise history records and others will be covered in sequence. Slide the page up and down to check records that are displayed in chronological order.

Alarm Clock: Click the alarm clock to set. Click to set its ring time and repetition period. All alarm clocks that have been set successfully (up to 5) will be displayed in the list page (no response if it exceeds 5 alarm clocks);. Add some alarm clock to enter its detailed page, then you can change its ring time or delete the alarm clock (the alarm clock that has been deleted won't be displayed in the list. Please directly return to the alarm clock list page); Alarm Clock Prompt Interface: You can close the alarm clock (press the gray trash key on the bottom).

topwatch: Click stopwatch function - enter stopwatch interface - click "Start" key - start to time. Press the key at the bottom right to pause, and press the key at the bottom left to zero;

"Stopwatch" can be used to count only in the function page. Please note that it only display 1 counting data (up to 8 counting).

Contact: Manually add the contact list of the bracelet to the APP (up to 15);

Flashlight: Serve as an electric torch;

Sedentary Reminder: Click sedentary reminder to enter the relevant settings interface, then you can set data in relation to power-on, power-off, remind interval and times;

Settings: After entering the settings interface, you can find "Dial Settings", "Sleep Settings", "Other Settings", "About the Bracelet", "Power-off" and "Restore Factory Settings";

Dial Settings: Enter to switch dials. Slide up and down to select dials as you wish. Click the selected dial to switch; .

Other Settings: "Raise to Wake", "Screen-on Time", "Notification Reminder" and "Heart Rate Automatic Measurement";

About the bracelet: Display bracelet type, device address and software version.

How to Remove Malfunctions

bracelet fails to power on?

1. Maybe the time you took to press the On/Off key is too short. Please press the On/Off key for more than 3s;
2. Low battery. Please connect to the charger to charge;
3. If you don't use the bracelet for a long time and it fails to be charged by normal chargers, please try to charge and activate it by 5V/1A charger.

bracelet automatically powers off?

Low battery. Please connect to the charger to charge.

Short service life?

1. Not be fully charged. Please take adequate time to charge (at least 2h);
2. Check whether the charger or charging cable is in good condition. Try to change charger and charging cable;
3. Check whether the charging cable port is connected well, then try again.

Function Instructions

Today's Exercises: The default option is to turn on the step counting function and display real-time data for that day. After a successful pairing with APP, sports data such as step, distance and calorie will be automatically synchronized (or manual refresh) to the APP. Click the screen again and you can view the comparison diagram of sports data for the week. Slide right to return to the data interface.

Find Mobile: After a successful pairing with APP, click "Find Mobile" in the bracelet. "Find Mobile" interface will be popped up and your mobile phone vibrates and rings.

Music Control: Open the mobile music player, then use the bracelet to synchronize and update .

Music Sodcast: Turn on the function to sodcast music .

Remote Photography: Click "Remote Photography" on the bracelet, then the camera function will automatically pop up on your phone. Click or shake your phone to take photos.

Sports Mode: include indoor and outdoor running, outdoor hiking, indoor walking, outdoor biking, indoor biking, climbing, free training and history record. The product isn't equipped with GPS function, so different versions may show different information for some functions that need GPS assistance, including exercise algorithm and track. Please click the corresponding sports icon according to its actual functions. What's more, you are allowed to enter the corresponding sports mode and set sports goal such as distance, time and calorie burned (it is not required to set a sports goal). The product can save up to 8 recent exercise history records and others will be covered in sequence. Slide the page up and down to check records that are displayed in chronological order.

Alarm Clock: Click the alarm clock to set. Click to set its ring time and repetition period. All alarm clocks that have been set successfully (up to 5) will be displayed in the list page (no response if it exceeds 5 alarm clocks);. Add some alarm clock to enter its detailed page, then you can change its ring time or delete the alarm clock (the alarm clock that has been deleted won't be displayed in the list. Please directly return to the alarm clock list page); Alarm Clock Prompt Interface: You can close the alarm clock (press the gray trash key on the bottom).

topwatch: Click stopwatch function - enter stopwatch interface - click "Start" key - start to time. Press the key at the bottom right to pause, and press the key at the bottom left to zero;

"Stopwatch" can be used to count only in the function page. Please note that it only display 1 counting data (up to 8 counting).

Contact: Manually add the contact list of the bracelet to the APP (up to 15);

Flashlight: Serve as an electric torch;

Sedentary Reminder: Click sedentary reminder to enter the relevant settings interface, then you can set data in relation to power-on, power-off, remind interval and times;

Settings: After entering the settings interface, you can find "Dial Settings", "Sleep Settings", "Other Settings", "About the Bracelet", "Power-off" and "Restore Factory Settings";

Dial Settings: Enter to switch dials. Slide up and down to select dials as you wish. Click the selected dial to switch; .

Other Settings: "Raise to Wake", "Screen-on Time", "Notification Reminder" and "Heart Rate Automatic Measurement";

About the bracelet: Display bracelet type, device address and software version.

How to Remove Malfunctions

bracelet fails to power on?

1. Maybe the time you took to press the On/Off key is too short. Please press the On/Off key for more than 3s;
2. Low battery. Please connect to the charger to charge;
3. If you don't use the bracelet for a long time and it fails to be charged by normal chargers, please try to charge and activate it by 5V/1A charger.

bracelet automatically powers off?

Low battery. Please connect to the charger to charge.

Short service life?

1. Not be fully charged. Please take adequate time to charge (at least 2h);
2. Check whether the charger or charging cable is in good condition. Try to change charger and charging cable;
3. Check whether the charging cable port is connected well, then try again.

Function Instructions

Today's Exercises: The default option is to turn on the step counting function and display real-time data for that day. After a successful pairing with APP, sports data such as step, distance and calorie will be automatically synchronized (or manual refresh) to the APP. Click the screen again and you can view the comparison diagram of sports data for the week. Slide right to return to the data interface.

Find Mobile: After a successful pairing with APP, click "Find Mobile" in the bracelet. "Find Mobile" interface will be popped up and your mobile phone vibrates and rings.

Music Control: Open the mobile music player, then use the bracelet to synchronize and update .

Music Sodcast: Turn on the function to sodcast music .

Remote Photography: Click "Remote Photography" on the bracelet, then the camera function will automatically pop up on your phone. Click or shake your phone to take photos.

Sports Mode: include indoor and outdoor running, outdoor hiking, indoor walking, outdoor biking, indoor biking, climbing, free training and history record. The product isn't equipped with GPS function, so different versions may show different information for some functions that need GPS assistance, including exercise algorithm and track. Please click the corresponding sports icon according to its actual functions. What's more, you are allowed to enter the corresponding sports mode and set sports goal such as distance, time and calorie burned (it is not required to set a sports goal). The product can save up to 8 recent exercise history records and others will be covered in sequence. Slide the page up and down to check records that are displayed in chronological order.

Alarm Clock: Click the alarm clock to set. Click to set its ring time and repetition period. All alarm clocks that have been set successfully (up to 5) will be displayed in the list page (no response if it exceeds 5 alarm clocks);. Add some alarm clock to enter its detailed page, then you can change its ring time or delete the alarm clock (the alarm clock that has been deleted won't be displayed in the list. Please directly return to the alarm clock list page); Alarm Clock Prompt Interface: You can close the alarm clock (press the gray trash key on the bottom).

topwatch: Click stopwatch function - enter stopwatch interface - click "Start" key - start to time. Press the key at the bottom right to pause, and press the key at the bottom left to zero;

"Stopwatch" can be used to count only in the function page. Please note that it only display 1 counting data (up to 8 counting).

Contact: Manually add the contact list of the bracelet to the APP (up to 15);

Flashlight: Serve as an electric torch;

Sedentary Reminder: Click sedentary reminder to enter the relevant settings interface, then you can set data in relation to power-on, power-off, remind interval and times;

Settings: After entering the settings interface, you can find "Dial Settings", "Sleep Settings", "Other Settings", "About the Bracelet", "Power-off" and "Restore Factory Settings";

Dial Settings: Enter to switch dials. Slide up and down to select dials as you wish. Click the selected dial to switch; .

Other Settings: "Raise to Wake", "Screen-on Time", "Notification Reminder" and "Heart Rate Automatic Measurement";

About the bracelet: Display bracelet type, device address and software version.

How to Remove Malfunctions

bracelet fails to power on?

1. Maybe the time you took to press the On/Off key is too short. Please press the On/Off key for more than 3s;
2. Low battery. Please connect to the charger to charge;
3. If you don't use the bracelet for a long time and it fails to be charged by normal chargers, please try to charge and activate it by 5V/1A charger.

bracelet automatically powers off?

Low battery. Please connect to the charger to charge.

Short service life?

1. Not be fully charged. Please take adequate time to charge (at least 2h);
2. Check whether the charger or charging cable is in good condition. Try to change charger and charging cable;
3. Check whether the charging cable port is connected well, then try again.

Function Instructions

Today's Exercises: The default option is to turn on the step counting function and display real-time data for that day. After a successful pairing with APP, sports data such as step, distance and calorie will be automatically synchronized (or manual refresh) to the APP. Click the screen again and you can view the comparison diagram of sports data for the week. Slide right to return to the data interface.

Find Mobile: After a successful pairing with APP, click "Find Mobile" in the bracelet. "Find Mobile" interface will be popped up and your mobile phone vibrates and rings.

Music Control: Open the mobile music player, then use the bracelet to synchronize and update .

Music Sodcast: Turn on the function to sodcast music .

Remote Photography: Click "Remote Photography" on the bracelet, then the camera function will automatically pop up on your phone. Click or shake your phone to take photos.

Sports Mode: include indoor and outdoor running, outdoor hiking, indoor walking, outdoor biking, indoor biking, climbing, free training and history record. The product isn't equipped with GPS function, so different versions may show different information for some functions that need GPS assistance, including exercise algorithm and track. Please click the corresponding sports icon according to its actual functions. What's more, you are allowed to enter the corresponding sports mode and set sports goal such as distance, time and calorie burned (it is not required to set a sports goal). The product can save up to 8 recent exercise history records and others will be covered in sequence. Slide the page up and down to check records that are displayed in chronological order.

Alarm Clock: Click the alarm clock to set. Click to set its ring time and repetition period. All alarm clocks that have been set successfully (up to 5) will be displayed in the list page (no response if it exceeds 5 alarm clocks);. Add some alarm clock to enter its detailed page, then you can change its ring time or delete the alarm clock (the alarm clock that has been deleted won't be displayed in the list. Please directly return to the alarm clock list page); Alarm Clock Prompt Interface: You can close the alarm clock (press the gray trash key on the bottom).

topwatch: Click stopwatch function - enter stopwatch interface - click "Start" key - start to time. Press the key at the bottom right to pause, and press the key at the bottom left to zero;

"Stopwatch" can be used to count only in the function page. Please note that it only display 1 counting data (up to 8 counting).

Contact: Manually add the contact list of the bracelet to the APP (up to 15);

Flashlight: Serve as an electric torch;

Sedentary Reminder: Click sedentary reminder to enter the relevant settings interface, then you can set data in relation to power-on, power-off, remind interval and times;

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.