




Outdoor waterproof  
bluetooth speaker  
User Manual

HPS-026

Thank you for order CAT Bluetooth  
Speaker, We hope you will enjoying it.

Button Function

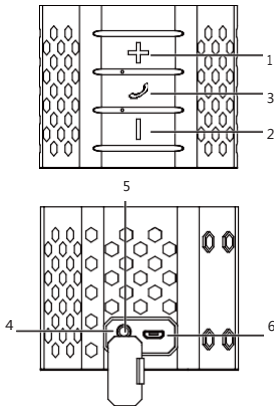

- 1、Volume up/Next song
- 2、Volume down/Previous song
- 3、Phone Key  
(Long press to Power On/Off, Short press to Answer/  
Hang up phone call/Play/Pause)
- 4、3.5mm AUX Port
- 5、Reset(Inside AUX)
- 6、USB

Specifications

Mode: CAT-BT-MINISPK  
Bluetooth Version: Bluetooth V2.1+EDR/4.2  
Bluetooth Range: 10-12m  
Bluetooth Profile:HPF V1.5,HSP V1.2,A2DP V1.2, AVRCP  
Rated Power: 3W  
Frequency Response: 100Hz-16KHz  
SNR: 82 dB  
THD :<10% THD (1KHz-6 dB Input)  
Battery: Built-in 3.7V 1800mAh Lithium Battery Input:  
Micro USB 5V 2A  
Charge Time: About 2H  
Playtime: 6 Hours  
Product Size: 78\*78\*63mm  
Operation Temperature: 0~45°C  
Storage Temperature: -10~60°C

LED Indicator Light

Charge Mode: The red light bright when charge.  
The red light go out after full charge.  
Pair mode: When pairing state,the red and blue light  
alternately flash. The blue light steady on after pairing  
success  
Play: The blue light flashes slowly  
Pause: The blue light steady on  
Call status: The blue light flashes slowly during the call

Package Include

- |                      |       |
|----------------------|-------|
| 1、Bluetooth Speaker  | 1 PCS |
| 2、USB charging cable | 1 PCS |
| 3、3.5mm audio cable  | 1 PCS |
| 4、User Manual        | 1 PCS |

Wireless Bluetooth Connection

- 1、The B15 speaker will under Bluetooth mode  
automatically when turn on.
- 2、When pairing state,the red and blue light  
alternately flash.
- 3、Turn on the Bluetooth of your phone, then search  
and find the device named"CAT-BT-MINISPK",  
Please click it and wait for connection.The blue  
indicator light steady on after pairing success

Tips: Please restart or maybe the battery power not  
enough if the connection fails

Function Description

- 1、Power On/Off:  
Long press the Phone Button(3) to turn on the  
speaker, You will hear the prompt when turn on.  
And the red and blue light alternately flash.Long  
press the Phone button(3) again to turn off the  
speaker.
- 2、Low battery:  
Products in the Bluetooth mode to use the process  
of continuous interval of 10 seconds to hear a "Di"  
prompt sound prompt is low battery, automatically  
shut down after 5 times
- 3、AUX Mode:  
Please short press Phone button(3) to pause when

4、Bluetooth Mode:

After the Bluetooth connection is successful, turn  
on the Bluetooth device to play music.Short press  
"+/-" button to adjust the volumeLong press "+/-"  
button to pick a song Short press Phone button(3)  
to Play/Pause

5、Hands-free call:

After the Bluetooth speaker is connected with the  
mobile phone successfully. The speaker will have a  
prompt when there is a call. Press the Phone  
button to answer the phone call. Short press to  
hang up the call during a call. And long press for 1  
second to reject the call when you have a call.

6、TWS:

- ① First: Turn on these twin speakers at the same time  
Second: Select one of the products and long press  
the "+" button (1) for 3 seconds. Waiting for two  
products to interconnect, after connection, the blue  
light of one product will steady on, and the red and  
blue light of another product will alternately  
flashing.  
Third: Turn on the Bluetooth of your phone, search  
and find the device named"CAT-BT-MINISPK",  
then pair with them.  
Finally: Play music to experience true wireless  
stereo sound after pairing success.
- ② Please clear the mobile phone Bluetooth pairing  
record "CAT-BT-MINISPK" when the Bluetooth  
connection is unsuccessful. Re-search the  
"CAT-BT-MINISPK" bluetooth and reconnect.

Attention

- Please store and use this product in a normal  
temperature environment;
- Please don't expose this product in the rain or  
moisture environment;
- Please don't throw away to avoid damage  
products
- Please don't disassemble,repair and modify this  
product;
- The product built-in lithium battery, please don't  
arbitrarily discard it or put it in the fire to avoid  
danger!
- Please quickly unplug the charging cable if the  
sudden abnormal phenomenon to avoid accident,  
and please contact with our after-sales department  
for maintenance in time

Tips

- 1、To help extendl the life of the speaker an your  
physical and mental health,Please don' t listento  
long time in a large volume, so as not to damage  
youtor hearing.
- 2、In the event of a malfunction, turn off the power  
switch immediately and unplug the USB plug to  
prevent damage to the speakers and other  
components.
- 3、Low battery will affect the Bluetooth distance or  
Bluetooth is easy to disconnect, please charge in  
time.

Ask and Answer

Questions	Answer
No any sound	1、Please press the Volume Up 2、Please make sure that the Bluetooth speaker is paired or connect to the downloaded play device.
Can not answer/hand up the phone call	These features depend on the ability of your phone to support hands-free, so some devices do not support it. Please refer to user manual of your device.
Can connect more than one speaker to a single device?	Please don't connect with two Bluetooth device at the same time.
Can not be connected with speaker via wireless	Please make sure your mobile phone turn on the Bluetooth device that it is connected. Please refer to the user manual.
Music staccato or Hear crackling	As a wireless technology, Bluetooth is very sensitive to the objects that are connected to the phone. Bluetooth speaker is designed to be used within 10 meters,without a major object in between(Wall etc).



### **FCC Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement.  
The device can be used in portable exposure condition without restriction.