

SKS-GERMANY.COM

+COM / UNIT



GEBRAUCHSANLEITUNG

INSTRUCTION MANUAL

INSTRUCTIONS DE MONTAGE

GEBRUIKSAANWIJZING

UTILIZZO

MANEJO

Gebrauchsanweisung

Verpackungsinhalt

- SKS +COM/UNIT
- Benutzerhandbuch

Produktbeschreibung

Dieses Produkt ist eine Smartphone Halterung mit integrierter Batterie und kabellosem Qi-Ladegerät. Sie können jedes Mobil- oder Ladegerät mit Qi-Support an das Ladegerät anschließen. Auch ein zweites Gerät kann mit einem USB-Kabel (nicht im Lieferumfang enthalten) über den USB-Anschluss geladen werden. Die +COM/UNIT kann mit einem USB Micro-B-Kabel und mit einem geeigneten USB-Ladegerät oder über COMPIT-Halter in Verbindung mit einem geeigneten E-Bike (nicht im Lieferumfang erhalten) geladen werden.


LED-Statusanzeige

	LED	Status	Anzeige
	Batterieanzeige	4 LEDs blinken orange nacheinander	Gerät wird geladen
		1 LED leuchtet	0%-25% Batteriekapazität
		2 LEDs leuchten	25%-50% Batteriekapazität
		3 LEDs leuchten	50%-75% Batteriekapazität
		4 LEDs leuchten	75%-100% Batteriekapazität
	Indikator für kabelloses Aufladen	Blau	Standby oder Ladevorgang beendet
		Blau blinkend (~1Hz)	Ladevorgang
		Blau schnell blinkend (~5Hz)	Fehler beim Laden

Technische Daten

Abmessung	ca. 130x70x21mm
Entladetemperatur	-10 ~ 60°C
Ladetemperatur	0~45°C
Eingangsstrom Eingang 1 (USB Micro-B)	DC 5V/2A
Eingangsstrom Eingang 2 (Gehäusekontaktierung)	DC 5-15V/2A
Wireless-Übertragungsleistung	5W
Wireless-Effizienz	>70%
Betriebsfrequenz	110KHz-205KHz
Wireless Output	DC 5V/1A
USB Output	DC 5V/2A
Batterietyp	Lithium-Polymer-Akku
Kapazität	5000mAh
Schutzart	IP54

Produkt

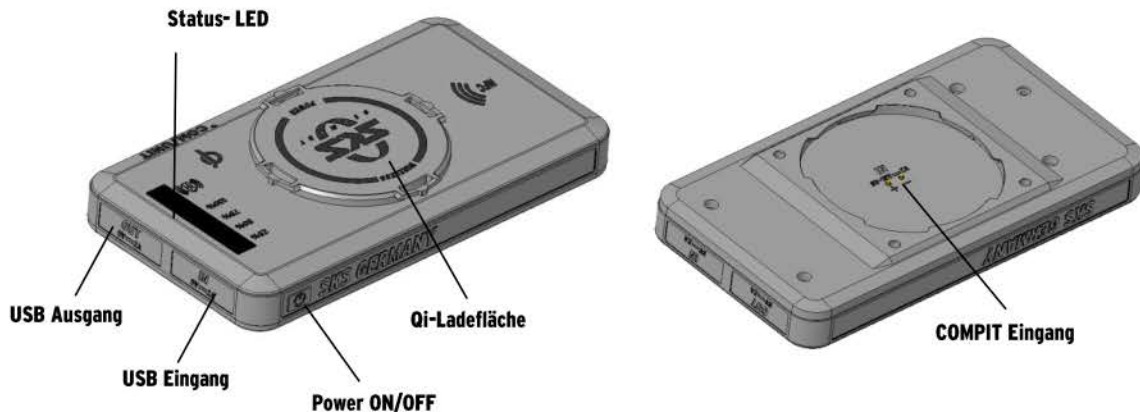

Kurzanleitung

+COM/UNIT - Laden ohne Kabel:

1. Drücken Sie auf den POWER-Knopf auf der Seite der +COM/UNIT. Die blaue LED auf der rechten Seite zeigt an, dass das Gerät eingeschaltet ist, und die orangenen LEDs der Batterieanzeige beginnen zu leuchten.
2. Legen oder docken Sie Ihr Smartphone bzw. Mobilgerät mit Qi-Support auf die +COM/UNIT und beginnen Sie den Ladevorgang.
3. Stellen Sie sicher, dass Sie Ihr Smartphone in die Mitte auf das SKS-Logo legen. Andernfalls beginnt die blaue LED schnell zu blinken, was bedeutet, dass während des Ladevorgangs ein Fehler aufgetreten ist. In diesem Fall nehmen Sie Ihr Smartphone von der +COM/UNIT und korrigieren Sie dessen Position.

+COM/UNIT -Laden mit Kabel über USB-Anschluss:

1. Schließen Sie das USB-Kabel an die Ausgangsbuchse der +COM/UNIT an und verbinden Sie es anschließend mit Ihrem Tablet oder Smartphone.

Laden der +COM/UNIT:

1. Verbinden Sie das Mikro-USB-Kabel (nicht im Lieferumfang enthalten) mit dem Mikro-USB-Port. Laden Sie die +COM/UNIT mit einem geeigneten Ladegerät auf. Alternativ kann die +COM/UNIT auch über COMPIT-Halter in Verbindung mit einem geeigneten E-Bike (nicht im Lieferumfang erhalten) geladen werden.
2. Wenn die Batterie der +COM/UNIT komplett aufgeladen ist, leuchten alle vier orangenen LEDs. Die voraussichtliche Ladedauer beträgt 6+ Stunden (abhängig von Ladegerät).

Warnhinweise

- **Prüfen Sie, ob die auf dem Netzadapter angegebene Spannung der Netzspannung vor Ort entspricht, bevor Sie den Adapter an das Stromnetz anschließen.**
- **Benutzen Sie den Netzadapter, das COMPIT-Halter oder die Ladestation nicht, wenn diese beschädigt sind.**
- **Verwenden Sie ausschließlich autorisierte Netzadapter.**
- **Kleben Sie keine Metalletiketten oder andere Objekte auf die +COM/UNIT.**
- **Benutzen Sie die +COM/UNIT nicht in der Nähe von beheizten Oberflächen.**
- **Wenn Sie einen Herzschrittmacher oder ein anderes implantiertes Gerät haben, konsultieren Sie Ihren Arzt oder den Hersteller des Implantats, bevor Sie die +COM/UNIT benutzen.**
- **Kein Verlängerungskabel oder überlastete Steckdosen benutzen.**
- **Kinder sowie körperlich oder geistig behinderte Personen dürfen die +COM/UNIT nur unter Aufsicht benutzen.**

User manual

Package contents


-SKS +COM/UNIT

-User manual

Product description

This product is a smartphone holder with integrated battery and wireless Qi charger. You can place any mobile or charging device with Qi support on the +COM/UNIT. Also a second device can be charged by the USB port with a USB cable (not included). The +COM/UNIT can be charged with a USB Micro-B cable and with a suitable USB charger or by COMPIT holder in conjunction with a suitable e-bike (not included).


LED Indicators

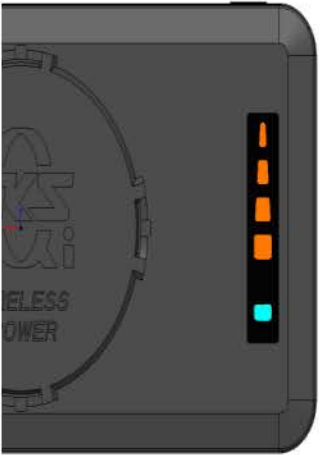	LED	State	Indicator
	Chargingindikator	4 LED blinking orange	COM/UNIT charging
		1 LED lighting	0%-25% battery capacity
		2 LED lighting	25%-50% battery capacity
		3 LED lighting	50%-75% Battery capacity
		4 LED lighting	75%-100% battery capacity
	Wireless charging indicator	Blue	Standby oder Ladevorgang beendet
		Blinking blue	Normal charging
		Blinking blue rapidly	Abnormal charging

Specifications

Dimensions	~130x70x21mm
Discharging temperature	-10 ~ 60°C
Charging temperature	0~45°C
Power input 1 (USB Micro-B)	DC 5V/2A
Power input 2 (COMPIT)	DC 5-15V/2A
Wireless Transfer Power	5W
Wireless efficiency	>70%
Operational frequency	110KHz-205KHz
Wireless Output	DC 5V/1A
USB Output	DC 5V/2A
Battery type	Lithium-Polymer-Battery
Kapazität	5000mAh
Protection	IP54

Product

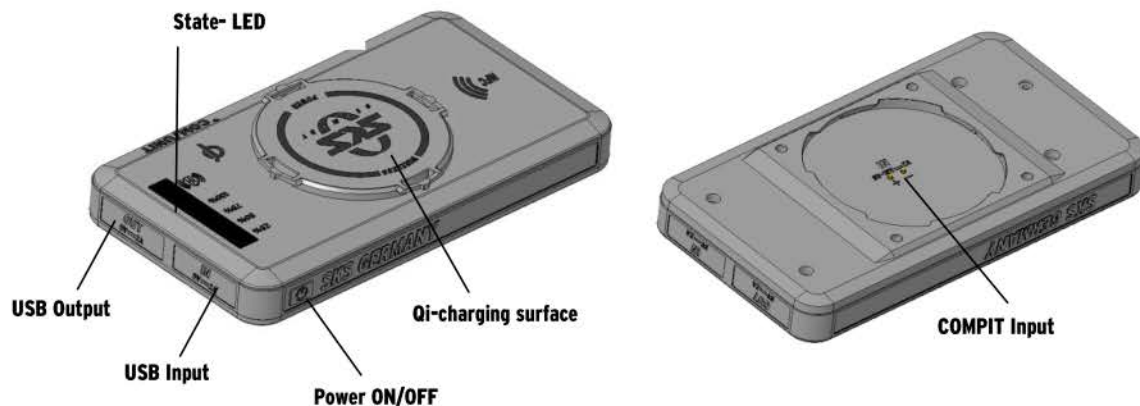

Quick start Guide

+COM/UNIT - Charging without cable

1. To start, press the power button on the side. The blue LED on the right will turn on for "power" and the battery level indicator orange LED`s will turn on.
2. Place or dock your smartphone or mobile device with Qi support on the +COM/UNIT and start charging.
3. Make sure you place your smartphone in the middle of the SKS logo. Otherwise, the blue LED starts blink rapidly, which means that an error has occurred during the charging process. In this case, remove your smartphone from the +COM/UNIT and correct its position.

+COM/UNIT -The charging by the USB port:

1. Connect the USB cable to the +COM/UNIT output jack and then connect it to your tablet or smartphone.

Charging the +COM/UNIT:

1. Charge the +COM/UNIT with a suitable charger. Alternatively, the +COM/UNIT can also be loaded via COMPIT holder in conjunction with a suitable e-bike (not included).
2. When the +COM/UNIT battery is fully charged, all four orange LEDs will be on. Approximate charging time is 6+ hours (depending on the charger).

Warning notifications

- **Check that the voltage indicated on the AC adapter corresponds to the local voltage before connect the adapter to an electrical socket.**
- **Do not use the AC adapter, the COMPIT holder, or the charging cradle if any of them is damaged in any way.**
- **Use only authorized power adapters.**
- **Do not stick metal tags or other objects on the +COM/UNIT.**
- **Do not use the +COM/UNIT near heated surfaces.**
- **If you have a pacemaker or other implanted device, consult your doctor or the manufacturer of the implant before using the +COM/UNIT.**
- **Do not use with an extension cord or overloaded electricals outlets.**
- **Children and physically or mentally handicapped persons may only use the +COM/UNIT under supervision.**

Wireless Charging Power Bank

+COM/UNIT

FCC statement

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the Federal Communications Commission (FCC) rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Privacy of communications may not be ensured when using this device.

30 General Information

WARNING

Changes or modifications, to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC statement

IC statement

RSS-Gen statement:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

- 1) L'appareil ne doit pas produire de brouillage;
- 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.