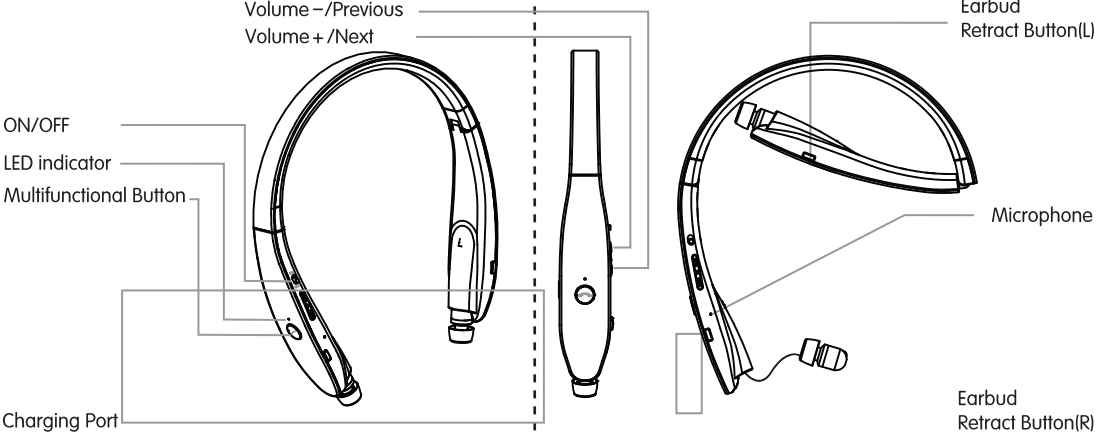


Lectronic Lomina Bluetooth Earphone Quick Guide	For user' s safety, please read this manual before using the headset. The following matters should be paid attention to when using headphones : Please avoid under the high volume mode, because it will lead to hearing loss caused by noise. If you are in bad condition of potentially dangerous, please stop using headphones, in order to ensure safety. Users should be reasonable control volume and time when listening to the headphones. The volume should not be too high, cause you can't hear the voice around the volume, if volume is too high that may appear tinnitus, please lower down the volume. Don't listen to the music while driving. With dry soft cloth to clean the headset! Should avoid the headphone into the water, that will cause headset damage. If you feel obvious discomfort, stimulation, or other adverse reaction when using the headset, should immediately stop using it. The headphones should not be stored or used in temperature below 15° C (5° F) or higher than 55° C (131° F), otherwise will reduce headphones or battery life.	Charging and Battery: Before charging this headset with charging cable, please check whether the charging cable is the original. Warning: please charging the headsets with original charging cable ,it may damage the battery or the headset if you are using improper charging cable. This headset has built-in rechargeable batteries, so do not attempt to remove the battery from the headset to avoid damaging it. 1. Before charging, it's best to turn off the headset. 2. Insert the USB charging cable to earpiece jack, the other end of the USB port into the USB charger or any other devices to start charging.The headphones red light flashing indicates it is charging. 	3. The headset need about 3.5 hours for fully charging,the red light goes off when fully charged. ■ Package content: • Headset 1pcs • USB charging cable 1pcs • Earbud 2pcs • User Manual 2pcs ON/OFF 1. Push "ON", the headset will prompt for "Power ON" with vibration ; if red and blue light flashing alternately indicates it's ready for pairing with your device. 2. Switch to OFF to turn off the headset, it will prompt "Power OFF".	Bluetooth connection steps: 1. Please keep your headset and mobile phone as close as you can, within 1 meter. 2. Switch to "ON", it will prompt "pairing" after 5 seconds, and then Red and blue lights flashing alternately when headset is on and ready for pairing. 3. Turn on "Bluetooth" in setting(your device) and find headset name "Lectronic Lomina". 4. Click "Lectronic Lomina", Bluetooth headset gets connected with your mobile phone automatically. Some may require pass code which is 0000. Pair the headset with 2 mobile phones 1. After successfully paired with a mobile phone, close the Bluetooth function of the mobile phone, and switch the button of "Lectronic Lomina" to OFF. 2. Same procedure to get the 2nd mobile phone paired with the Bluetooth headset. 3. Turn on the Bluetooth function of the 1st mobile phone; choose "Lectronic Lomina" to finish the pairing status with the 2nd mobile phone. Note: 1. With your perviously paired device' s Bluetooth turned on and in range , turn on "Lectronic Lomina". The headset will automatically reconnect to the same Bluetooth device that connected last time. If you have a previously paired device that does not auto-reconnect , navigate to the Bluetooth settings menu on your device , turn on the Bluetooth feature and select "Lectronic Lomina" from your list of paired Bluetooth devices.
	2. Pairing time exceeds 3 minutes, S801 will automatically shut down ; in 3 minutes back to the effective distance can automatically return to the last connected device . 3. P.S.: If connected with two mobile phones, only mobile phone 1 supports wireless music and you can start conversation for both mobile phones. Battery check up through iPhone. Answer & End call / Incoming call vibration remind Answer phone call : When there is a incoming call ,there will be a voice prompt ,like "incoming call, 134... 2578 (phone number will be broadcasted)" . Click MFB to answer, or just operate your mobile phone. End Call : Press the multifunction button to hang up calls, or by direct hang up your phone call. Reject call : When there is incoming call, headphone will broadcast "incoming call" with vibration, Long press the MFB to reject , or just reject it on your mobile phone. Last number redial : Double click MFB.	Call Transfer : Double click the volume "—" when calling to have call transfer between phone and headset. EQ Shift : Double click the volume "====" when playing music to have different sound effect (low bass boost, normal, high pitch boost). Default setting is low bass boost. Choose your favorite sound effect base on your habit and music style. Power prompt : Each time turn on LeCtronic , it will report headset battery power remaining, such as "battery full", "battery level high", "battery level medium", "battery level low", "recharge headset". Voice Dial : Unlock the mobile phone and double click the volume "++" to launch the voice dial, and then just speak the people name you want to call. This function can work only if your mobile phone support it. Play/Pause/Tracks During music playing, single click MFB to pause music, and click again MFB to back to play. During music playing, single click " + / - " to change songs.	During the call or listening to music, user can long press "++" or "--" button to adjust the volume. Mobile phone anti-lost indicator When the headphone connected to smart phone, if the distance between device and headphone out of 10 m, headphone will prompt "Beyond the range of connections". If coming back to the working distance within 3 min or after, the prompt will be off and reconnect automatically. If not coming back to the working distance in 10 min, headphone will be power off, please switch the button to the OFF and switch ON to the power on mode, headphone will back to work. Restore Factory Settings Long press the MFB while charging until the blue light flashing 3 times. ■ Technical Index • Correspond With : Bluetooth V4.2 • Support : HSP , HFP , A2DP , AVRCP • Transmitting Power : Class 2 • Working Distance : ≤10m • Frequency Range : 2.402GHz~2.480GHz • Charging time : ≤3.5hours • Talk time : ≥18hours • Music Time : ≥16hours • standby time : ≥300hours • Weight : 67g	Tips: Wrong way of setting back the wire Press the Earbud Retract Button directly. In this way, the earbuds will fit the headset aggressively. Correct way of setting back the wire In order to prolong the working life of the headset, please setback the wire slowly, and follow the steps shown below. 