

Digital Picture Frame

User Manual



159K

We provide 12 MONTHS warranty from the date of purchase, if you experience any problem not covered by FAQ, please don't hesitate to email us.

Table of Contents

FCC Warning Statement	01
ISED Warning Statement	02
EU Declaration of Conformity	03
Security Instructions	05
Packing and List	05
Frame Features	06
Getting Started	07
Manage Photos	09
Manage User	11
Video Tutorials	11
Functional Overview.....	12
Frameo+	14
FAQ	15
Warranty	15

FCC Warning Statement

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

FCC ID: 2ATFT-159K

ISED Warning Statement

ISED Statement

English: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3(B).

French: Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux RSS exemptés de licence d'Innovation, Sciences et Développement économique Canada.

L'exploitation est soumise aux deux conditions suivantes :

- (1) Cet appareil ne doit pas provoquer d'interférences.
- (2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.

L'appareil numérique du ciem conforme canadien peut-3 (b) / nmb-3 (b).

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.

EU Declaration of Conformity

Shenzhen Kejinming Electronic Co.,Ltd

EU Declaration of Conformity

1. Apparatus model/Product (product, type, batch or serial number):

Product name: Digital WiFi Photo Frame

Model No.: 159K

Brand name: N/A

2. Name and address of the manufacturer or his authorised representative:

Manufacturer: Shenzhen Kejinming Electronic Co.,Ltd

Address: 1~6F, Block B7, Yintian Industrial Park, Xixiang Street, Bao'an Dist, Shenzhen

3. This declaration of conformity is issued under the sole responsibility of the manufacturer

4. Object of the declaration

Refer to the section 1

5. The object of the declaration described above is in conformity with the relevant Union harmonisation legislation:

- RED Directive (2014/53/EU)
- LVD Directive (2014/35/EU)
- EMC Directive (2014/30/EU)

6. References to the relevant harmonised standards used or references to the other technical specifications in relation to which conformity is declared. References must be listed with their identification number and version and, where applicable, date of issue:

Essential requirement		Applied standard	Refer to report
Article 3.l(a)	Safety	EN IEC 62368-1:2020+A11:2020	Refer to report
Article 3.l(b)	RED	ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN 301 489-17 V3.2.4 (2020-09) EN 55032:2015/A1:2020 EN 55035:2017+A1:2020 ETSI EN 300 328 V2.2.2 (2019-07) EN IEC 62311: 2020	LCS22042I009AEA LCS22042I009AEB LCS22042I009AEC
Article 3.l(c)	EMC	EN 55032:2015/A1:2020 EN 55035:2017+A1:2020 EN IEC 61000-3-2:2019/A1:2021 EN 61000-3-3:2013/A2:2021	LCS22042I012AE

Shenzhen Kejinming Electronic Co.,Ltd

7. Notified body involved

None

8. Where applicable, description of accessories and components

Adapter	For AC Adapter Input: 100-240V~, 50/60Hz, 0.35A Max Adapter Output: 5.0V 3.0A, 15.0W
---------	---

9. Additional information

The technical documentation as required by the conformity assessment procedure is kept at the following address for a period ending at least 10 years after the last product has been manufactured at the disposal of the relevant national authorities of any Member State for inspection:

10. Signed for and on behalf of Shenzhen Kejinming Electronic Co.,Ltd

Name: Dani Lee

Signature: Dani Lee

Title: Product Manager

Date of issue: P.R.C. 09/05/2023

Email: info@kejinming.com

Security Instructions

1. The digital frame has a capacitive touch screen, which can be operated by touching it with your finger or by clicking it with a capacitive pen. Do not use sharp objects to click the screen.
2. Avoid placing the digital frame in high-temperature, high-humidity, or dusty areas.
3. To prevent violent impact between the display and the capacitive touch screen, do not drop or crash the digital frame.
4. Use only the charger adapter that comes with the digital frame. Using a different type of charger may cause the digital frame to burn.
5. Do not disconnect the digital frame while formatting it. This may result in an error, and our company will not bear the responsibility for memory loss due to damage, repair, or any other reason. Please refer to the user manual for proper operation and back up important data in time.
6. Do not attempt to dismantle the digital frame yourself, and avoid polishing it with alcohol, dilution, or benzene.
7. The digital frame's USB port is for transferring photos or videos, but not for charging the device.
8. A virus can damage the digital frame. Please use proper antivirus software on your computer and keep it updated.
9. If you need support for the digital frame, please email us at:

159k-frameo@eitack.com

Packing and List

Please make sure the following items are included in the package.

If any item is damaged or missing, contact us anytime to get a new one for free.



15.6 Digital Picture Frame*1



TYPE-C Adapter*1



Desk Stand*1




Wall Mounting Screws*2



User Manual*1

Frame Features

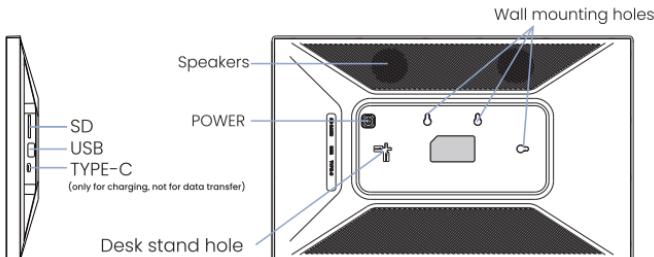


POWER	After connecting the power adapter, the unit will power on automatically. When it is on, press and hold the power button for approximately 3 seconds to access the reboot or power off menu. Short press on the power button to turn off/on screen.
Wall mounting holes	To mount the frame on the wall, use the screws provided with the product. The frame can be mounted either in portrait or landscape orientation.
Desk stand hole	Please use the stand to insert into the stand hole; the photo frame can be placed horizontally or vertically. Note: Do not forcefully pull out the stand. Please see the two-way arrow on the stand to move it down gently to pull it out.
Speakers	
SD card slot	This digital frame features a SD card slot that allows you to: ① Import photos/videos from the SD card to the digital frame. ② Export photos/videos from the digital frame to the SD card. ③ Playback photos/videos directly from the SD card without transferring.
USB slot	This digital frame features a USB slot that allows you to: ① Import photos/videos from a USB flash drive to the digital frame. ② Export photos/videos from the digital frame to a USB flash drive. ③ Playback photos/videos directly from a USB flash drive without transferring.
TYPE-C	Connect the adapter to power the device. NOTE: The TYPE-C port only supports charging (not for data transfer).

Getting Started


①Install the stand

Fit into the frame bracket on the back. You can place the frame either in landscape or portrait. You can also mount the digital frame on the wall with the wall mount hole on the back.

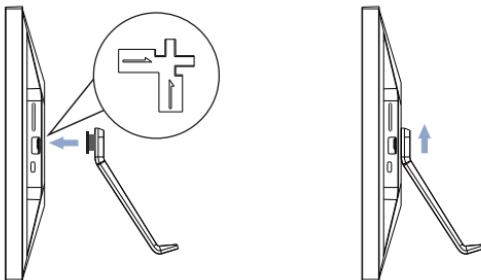

②Power on

Connect the power cable to your frame and plug the power adapter into the wall socket, the frame will enter the system in seconds.

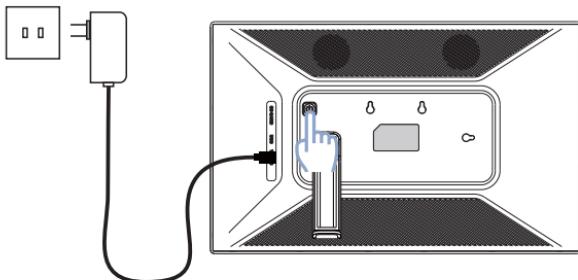

③Initial Settings

When you enter the system for the first time, you need to perform some initial settings (language, Wi-Fi, device information, sleep mode, etc).


④Connect to Wi-Fi

Select the Wi-Fi network you would like to connect to and enter the password if required. If your Wi-Fi network is not on the list, move your frame closer to your router, wait for seconds, and check it again.

Note: Wi-Fi only supports 2.4GHz spectrum, not 5GHz spectrum. If Wi-Fi shows connected but cannot be used, you need to check whether your Wi-Fi is 2.4GHz spectrum.

⑤Download the "Frameo" app

Download the "Frameo" app on your iOS or Android mobile device to send photos from your mobile phone to the digital photo frame.

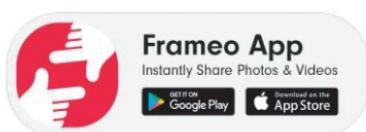

Scan code to find the App




Android



iOS

⑥Connecting a new friend

- Make sure that your friend has downloaded and installed "Frameo" App.
- Click the add friend icon  on your frame. A dialog will appear showing a unique code that is valid for 24 hours.
- Now share this code in whatever fashion you prefer e.g. SMS, Email, IM, or phone call to your friend.
- After connecting the frame to your friends "Frameo" app, they will automatically appear on your Frameo digital frame and be able to share photos with you.



⑦Share photos/videos to the digital frame

Three ways to transfer photos to the frame:

- Share photos/videos to the digital frame via the "Frameo" APP;
- Import photos/videos to the digital frame via SD card.
- Import photos/videos to the digital frame via USB flash drive.

⑧Navigating your frame

You interact with your frame through its touchscreen.

- Swipe left or right to go through your photos.
- To access the menu bar, simply tap the screen once to display the menu.
- In the menu bar, you will find quick access to the add friends dialog "  " and the settings menu "  ".



Manage Photos

①Memory usage

On the frame's settings page, click "  Manage Photos" to display the number of photos stored in the frame and the occupied/remaining storage space.

②Show/Hide photos

Select the photo you want to hide by tapping the photo. Hidden photos will not be deleted from the frame and can be re-displayed at any time.

③Delete photos

Click on the photo and select the "  "option to permanently remove it from the frame. This will make it easier for you to manage any expired photos.

④Import photos

Allows you to import photos from an SD card or USB flash drive.

—How to import photos into the photo frame?

1. Insert the SD card/USB flash drive into the digital photo frame.
2. Select the "Import" button and select the photos you want to import into the photo frame.
3. Click the Import button to start importing.

After the import is complete, the selected photos will be displayed in the digital photo frame.

⑤Export photos

You can export photos from the digital photo frame to an SD card/USB flash drive.

—How to export photos from the photo frame to an SD card/USB flash drive?

1. Insert the SD card/USB flash drive into the photo frame and click the "Export" button after reading successfully.
2. Select the photos to be exported from the photo frame's photo library.
3. Click the Export button to start exporting.

After the export is complete, the selected photos will be saved to the SD card/USB flash drive so that you can transfer them to other devices or store them as a backup.

Note:

1. Please format the SD card and USB drive to "FAT32" before use.
2. For best compatibility, we recommend using a 32GB SD card or USB drive, as 64GB and 128GB options may not work properly with the frame.

How to format the SD card and USB drive to "FAT32"?

Step 1




Insert the SD card into your computer, open "This PC," and locate the new drive that represents your SD card.




Insert the USB drive into your computer, then open "This PC" and locate the new drive that represents your USB drive.

Step 2

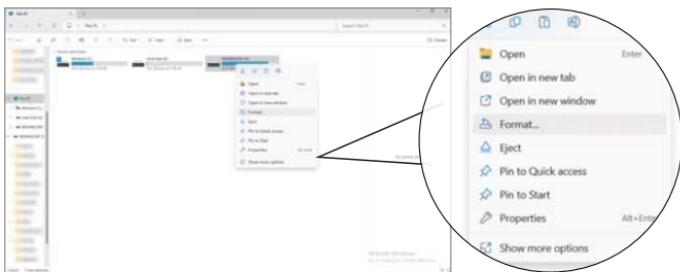

To check the format of your SD card or USB drive, open "This PC," right-click on the drive, and select "Format." This will display the current file system format of your device.

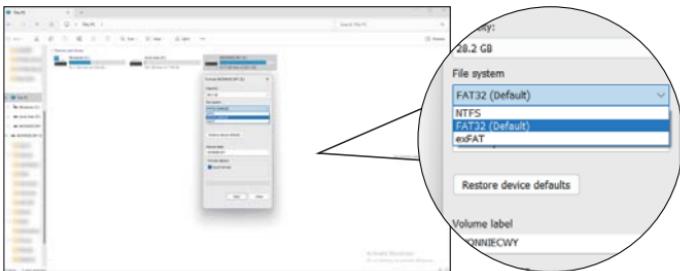

Clicking "Format" will open the above interface. Choose "FAT32" to format your SD card or USB drive. (Please note: Formatting the SD card or USB drive will erase all data stored on that card or drive. Be sure to back up any important files before proceeding.)

Manage Users

① User Settings

On the frame's settings page, click "  My friends" to display a list of all users connected to the photo frame who have the right to send photos to your photo frame. Click the "  " to the right of the user to set the user's access rights to the photo frame.

② User Management

Add users: Click the "  " to add new users to transfer photos to your photo frame.

Delete users: Click the user name in the list and select "Delete friends."

- Delete shared photos: You can delete all photos shared by the user.
- Delete users (without deleting shared photos): This option allows you to remove the user from the list, but does not delete any photos that the user has shared in the past.

Once a user is removed from the photo frame, they will no longer be able to share photos with your photo frame.

Video Tutorials

Check out our "Frameo Tutorials" playlist on YouTube, which includes informative videos that will guide you on how to get started using Frameo. Scan the code to the right or use the link to find the playlist.

If you have any questions, please feel free to scan the QR code to watch the video or contact us for assistance. Thank you very much.



Functional Overview

Transfer Photos/videos via Framro APP/SD Card/USB flash drive	✓(There is no time limit for the video uploads via SD card; Free Frameo app allows uploading only 15-second videos.)
Screen Resolution	✓(1920*1080 Full HD)
IPS HD Touch Screen	✓
Supported Expansion Memory Card	✓ (SD card/USB flash drive)
Multi User Connections	✓
Fit to frame/Fill frame	✓(This toggles how the photo is shown. The Fill frame option is the default. The photo is scaled so that it fills the whole screen. Fit to frame will make sure that the entire photo is shown on the screen.)
Adjust Photos	✓(Allows you to adjust the position of the photo in the frame for an even better fit.)
Auto-rotate	✓
Desk/Wall Mounted	✓
Frame Name	✓
Frame Location	✓
Set Languages	✓
Set Time Zone	✓
Show/Hide Photos	✓
Delete Photos	✓
Import/Export Photos/ Videos via SD Card and USB flash drive	✓(Directly play pictures and videos from SD cards and USB flash drives.)
Brightness Adjustment	✓
Sleep Mode	✓(Default setting 23:00-07:00, Customizable settings based on personal schedule)
Timer	✓(Define the duration a photo should be displayed)

12/24 Hour Format	✓
Show Caption	✓(Record the story of each photo, can display or hide subtitles)
Clock and Weather Widgets	✓
Slideshow	✓
Sound Adjustment	✓
Interacting with videos	✓(When a video is shown, two additional controls are shown. One for play/pause of the video and one to control the volume level for video sounds.)
React Interaction	✓(Tap one of the reactions to let the sender know how it made you feel.)
Automatic Backup	✓(Backup the content of the photo frame to the SD card or USB flash drive)
Reset Frame	✓
Software Update	✓(Frameo software will be continuously updated to introduce new features to meet customer needs.)
Privacy	✓(For more information regarding privacy, please visit http://privacy.frameo.net .)

Frameo+

To meet the needs of a small segment of customers, Frameo company has launched Frameo+, which adds four features to the original free Frameo.



See frame photos

See photos from your own or a friend's frame in the Frameo app.



Cloud backup

Keep your precious photos and videos safely backed up in the cloud.



Send more photos

Send up to 100 photos at a time.



Send longer videos

Send videos up to 2 minutes long via Frameo APP.

Upgrading to Frameo+ requires a paid membership. If you do not need the enhanced features of Frameo+, you can continue to use the free version of Frameo without any cost.

NOTE: The Frameo app is still available for free download. Only when you need to upgrade to the Frameo+ version, you need to pay for the Frameo+ membership.

FAQ

1. Is the frame installed with a battery?

Answer: No, this photo frame does not have a battery; it can only work with an adapter.

2. Why can't I power on when I plug in the adapter and press the power button?

Answer: You need to confirm whether the adapter is plugged in and check whether the power supply is normal.

3. What kind of app should I download for the photo frame?

Answer: To send photos to your frame, use the Frameo app for iOS or Android.

Find the Frameo app on Google Play by searching for "Frameo" or App Store by searching for "Frameo".

4. Can this digital frame operate with a 220V outlet?

Answer: Yes, this digital frame operates with a 100-240V outlet.

5. Can I send photos to the frame by mail?

Answer: No!

Way one: transfer photos to digital frame via "Frameo" App;

Way two: import photos to the digital frame via SD card.

Way three: import photos to the digital frame via a USB flash drive.

6. Can I transfer photos from my computer to the frame?

Answer: No!

7. Are my photo transfers safe?

Answer: Absolutely safe! The Frameo digital frames are authorized genuinely by the "Frameo" App company, so there is no need to worry about photos and videos being leaked.

For more information regarding privacy, please visit <http://privacy.frameo.net>

Warranty

* If there is a malfunction of the machine or damage to any part of the machine, stop using it and consult a licensed electrician for repairs.

* Do not attempt to modify or repair the machine yourself. If you have any problem with the product, please don't hesitate to email us at: **159k-frameo@eitack.com**

We will reply to you within 24 hours and give you the best solution. Thank you!

Digital Picture Frame

User Manual

159K