


T8 TWS Headset Manual FCC ID:2AU90-T8



Earphone Overviews

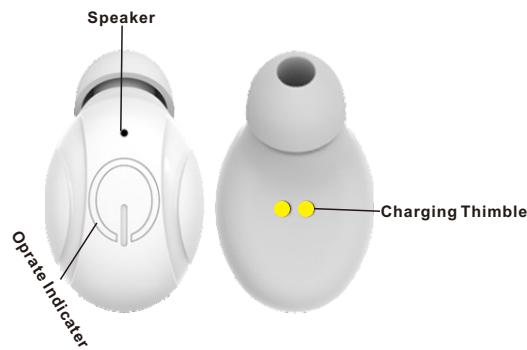

Package Content

- 1* manual
- 1* charger cable
- 2* headset
- 1* charger box

Charging

1. Charge the battery case:

(Note: Most USB chargers can be used to charge the case. For optimal DC charging, please use the charger not over 5V/2A)

- Charger Box LED status:

- Charging: LED flash
- Charging finished: LED is on then off after 30 seconds
- Charge time: about 1 hour

2. Charge the earphone:

Put the headset into the charging box, and the charging box will automatically detect whether the headset is in contact with ok. Close the top cover of charging box and the headset will charge automatically.

Earphones LED status:

- Charging: LED in red
- Charging finished: LED is all green then off after 10S
- Charge time: about 1 hour

(Warning: The batteries inside the charging case and earphones are all built in which is non-removable. Please don't attempt to remove them, or it will be damaged.)

How to pair earphone

1. The first Step: pair the L&R earphones:

The headset will auto power on when open the top cover of charger box, then red and green LED light flashes alternatively.

2. The two headsets will pair automatically in 15 seconds, the default right headset is the host.

3. After L&R earphones TWS successful, One earphone will enter into pairing mode again waiting to pair with the mobile devices;

4. Select "T8" in the list shown of mobile device and confirm to pair; (Voice prompt: Power on, connected)

AUTO POWER ON / OFF

1. After the headsets are put into the charging box, and the headsets will charged automatically when choose the top cover of charging box.

2. The headsets will be powered on when open the top cover of charging box.

POWER ON

Press "multifunction" KEY for 3 seconds, the red and green LED light flashes alternatively red (Voice prompt: "Power on")

POWER OFF

Press "multifunction" KEY for 5 seconds, LED will turn off.

(Voice prompt: "Power off")

TWS Monitor Mode

1. The L&R earphones are connected to the mobile devices at the same time.

2. One earphone is turned off and the other earphone is connected to the mobile devices automatically;

3. One earphone is connected to the phone, and the other will automatically team up after power on.

Answer Call

Press the "multifunction" KEY once while call is incoming.

End Call

Press the "multifunction" KEY once to end call.

Reject Call

Press the "multifunction" KEY 1 seconds and release to reject a call.

Last number redial

Press the "multifunction" KEY 3 times to redial the last call.

Play/Pause Music

Press the "multifunction" KEY once to play/pause music

VOLUME UP/DOWN

Adjust the volume on the mobile devices

NEXT TRACK

Double press the "multifunction" KEY on the right earphone to select the next track.

PREV TRACK

Double press the "multifunction" KEY on the left earphone to select the previous track.

Voice Assistance

In iOS or Andriod system, Press the "multifunction" KEY 1 second to turn on the Voice Assistance.

Specification

- Bluetooth Version: V5.0
- Headset Battery:50mAh
- Charging case battery: 18650(capacity optional)
- Speaker: Ø8mm
- Working distance: >15m
- Talk time: About 4 hours (Mono)
- Music play time: About 4 hours (70% volume)
- Standby time: About 120 hours

Notice

1. The working distance may be varied at different working environment.

2. The play time is calculated based on 70% volume.

3. Please turn off the earphones if you don't use them for a long time.

4. Please don't expose the earphones under excessive heat, including direct sunlight and fire.

5. Don't put the earphones into water directly.

6. This earphones is in compliance with the specified Bluetooth version. It does not guarantee compatibility of all functions on every Bluetooth enabled device. Please check with your mobile phone's user manual for compatibility and functionality.

(1) § 15.19 Labelling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

§ 15.21 Changes or modification warning

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

§ 15.105 Information to the user.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.