

## Specifications

### SYSTEM SPECIFICATIONS

Modulation Mode	Digital Frequency Modulate
Oscillation	PLL Synthesized
Carrier Frequency Range	UHF 902.6~924.3MHz
Preset Frequencies	60 (auto paring)
Frequency Response	75Hz~18kHz ± 3dB
Max. Deviation Range	± 50kHz (with level limiting)
T.H.D.	< 1.0% @ 1kHz
S/N	>98dB
Working Range	Up to 50m
RF Carrier Stability	± 0.005% (-10°C~50°C)

### MINI WIRELESS RECEIVER (METAL)


Dimension	93 x 31 x 20 mm
Power Supply	Built-in Li-on rechargeable battery (500mA)
Power Consumption	80mA
Battery Life	Up to 6 hrs
Recharging Time	About 1 hour (5V/1A)

### HANDHELD MICROPHONE (METAL)

Sound Cartridge	Dynamic
Carrier Frequency Power	30mw
Battery Type	2 x AA Size
Working Time	Up to 10 hrs
Dimension	250 x 55 mm
Weight	350 g

# UHF Wireless Microphone with Rechargeable Receiver


## USER MANUAL

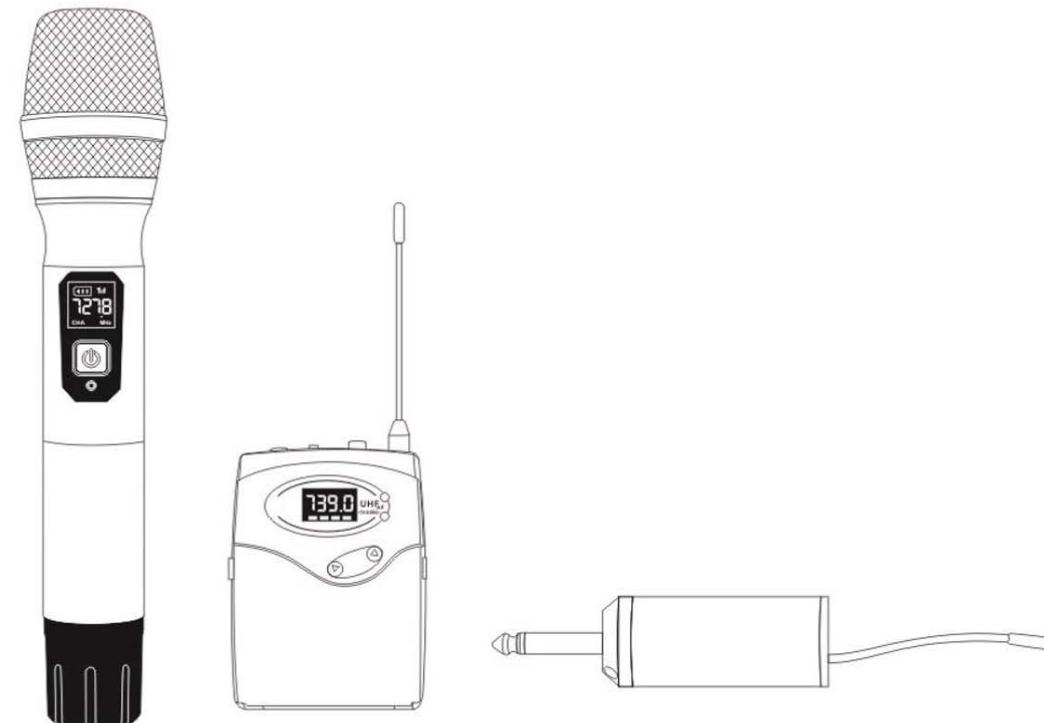

## Setup Tips

Please read carefully about the following setup tips before use it:


1. Open the handheld mic to install 2\*AA battery in the battery compartment
2. Plug in the receiver to any equipment coming with 6.35mm female connector
3. Please adjust the equipment volume to Min.
4. Press “Power” on both handheld mic & receiver
5. When RF/AF on receiver is lighted, the item is ready to use

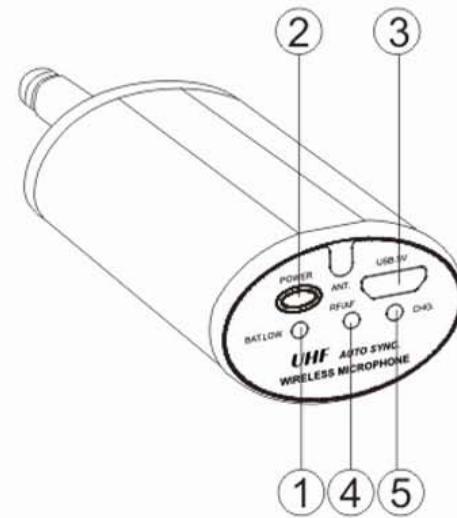

- ① Battery low indicator
- ② Power On/Off Switch
- ③ USB charging Port
- ④ RF/AF LED Indicator
- ⑤ Charging status

## Note

※ In order to avoid interference from other wireless devices, this items is designed with 25 selectable frequencies, when the microphone is powered on, just press the “One Key Auto Pairing” to change the frequency, the receiver will pair with transmitter frequency automatically.

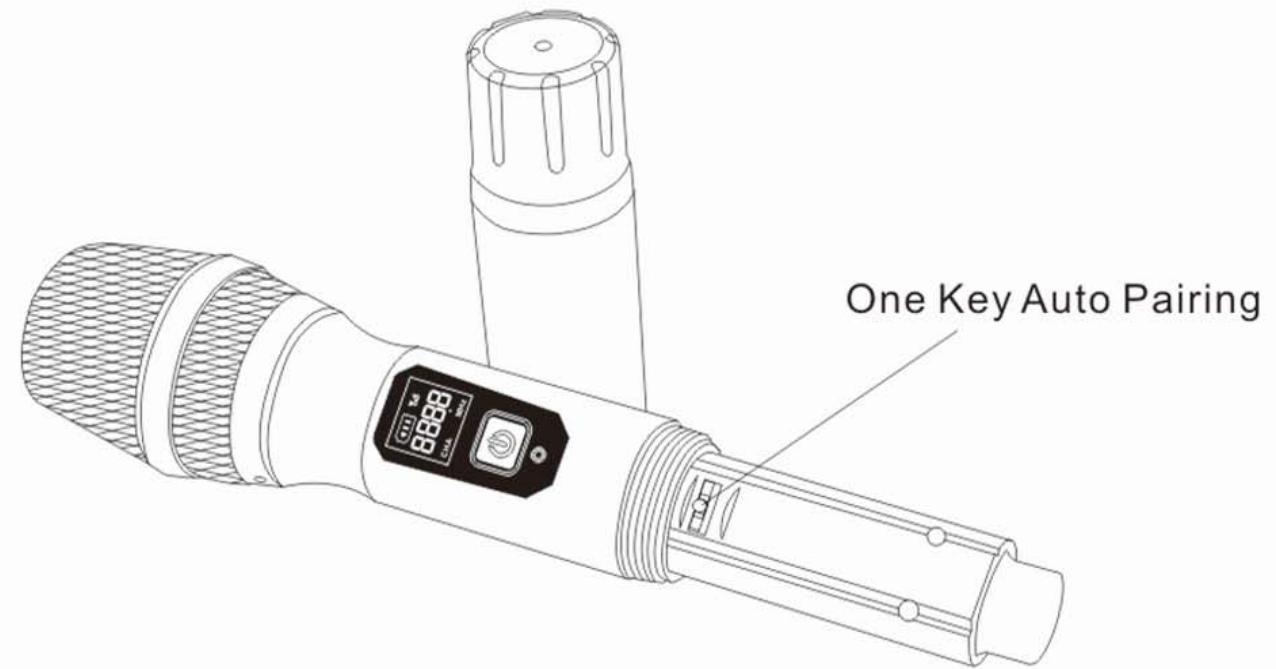

- ※ If the AF/RF on receiver is lighted, that means they are paired and ready to use.
- ※ There are battery indicators on both mic and transmitter, please change battery for mic when battery is low or charge receiver with the USB cable included. (Handhel mic works up to 8 hours and receiver lasts for 6 hours when fully charged by 1 hour).
- ※ In order to enjoy better transmission, please don't fold or cut the antenna on the receiver
- ※ If you will not use the item in a short time, please take out the battery from the handheld mic.
- ※ If any problem caused, please don't dissemble the item by yourself, please turn to the local distributor for help.

**FCC warning statement**

This device complies with Part 15 of the FCC rules.

Operation is subject to the following two conditions:

- 1) this device may not cause harmful interference, and
- 2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

This device operates on a no-protection, no-interference basis. Should the user seek to obtain protection from other radio services operating in the same TV bands, a radio license is required. For further details, consult Innovation, Science and Economic Development Canada's document Client Procedures Circular CPC-2-1-28, Voluntary Licensing of License-Exempt Low-Power Radio Apparatus in the TV Bands.