






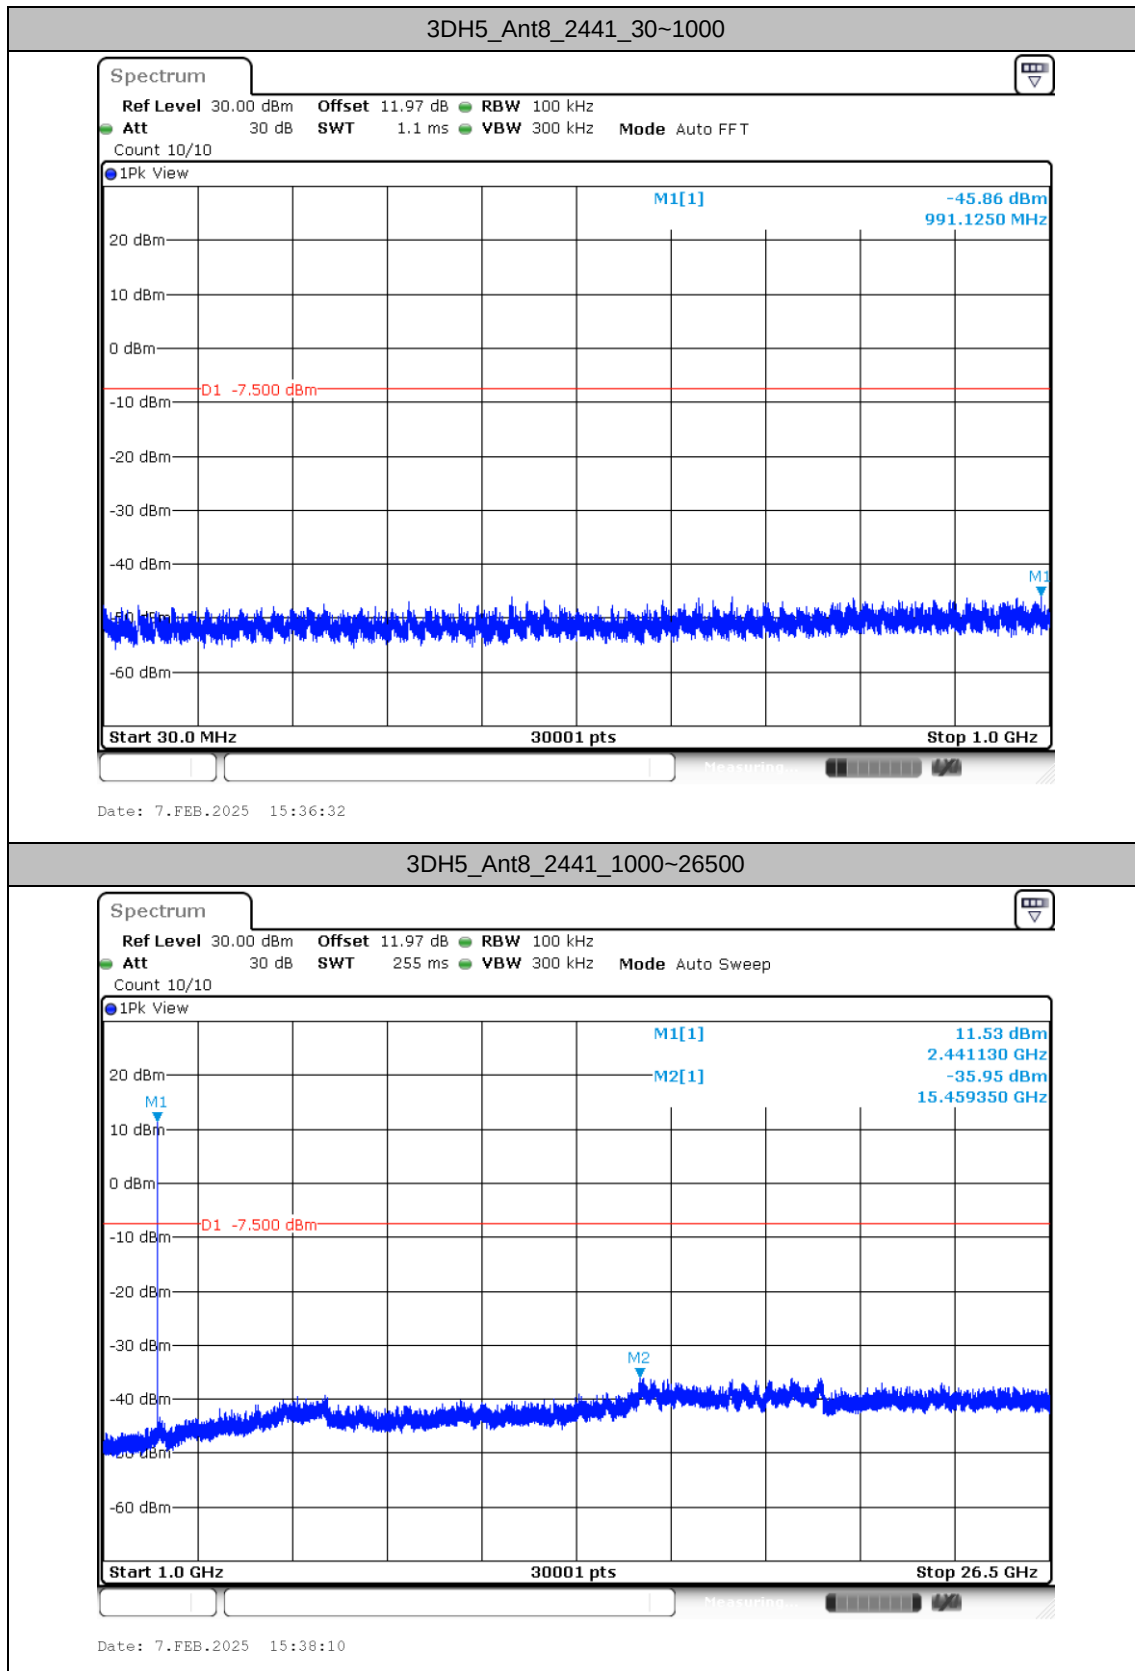


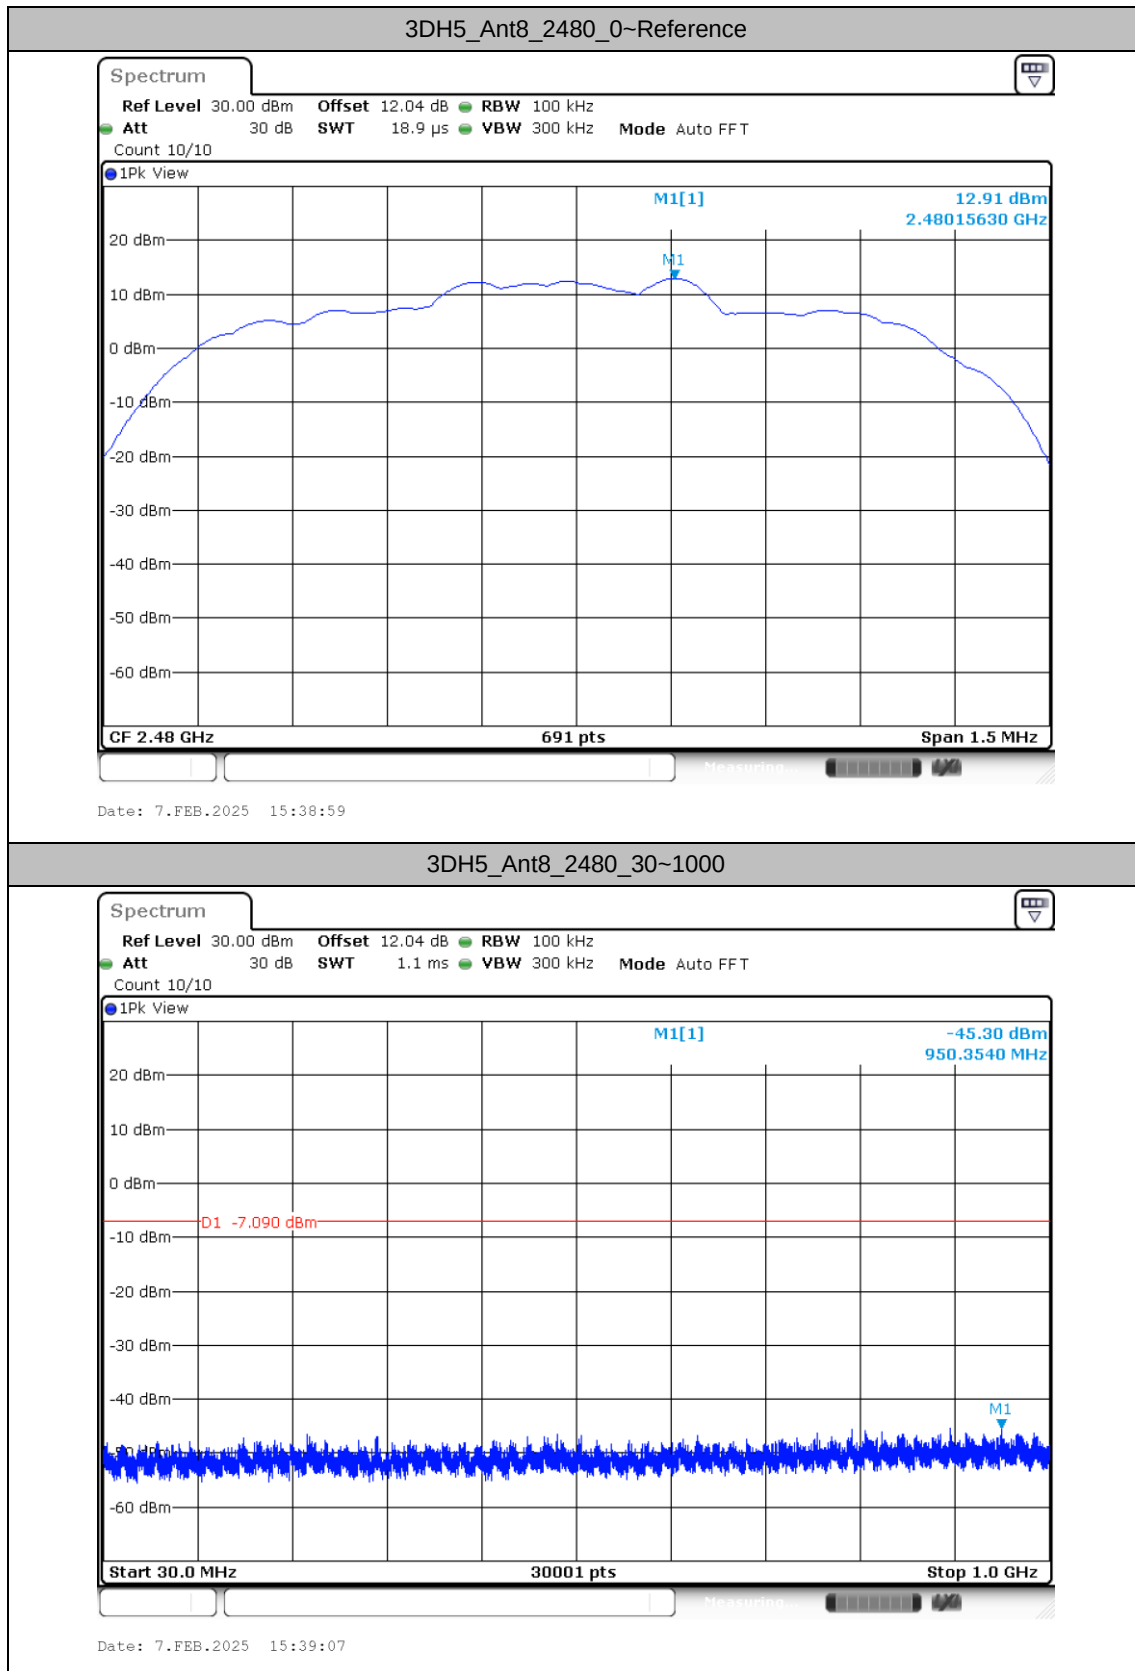

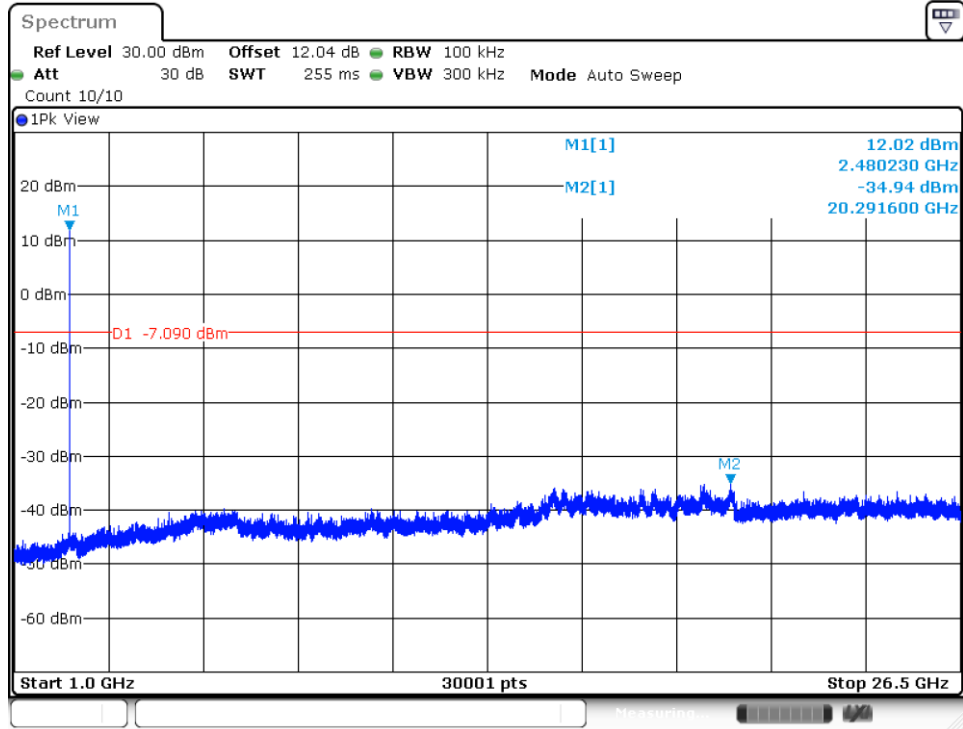

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

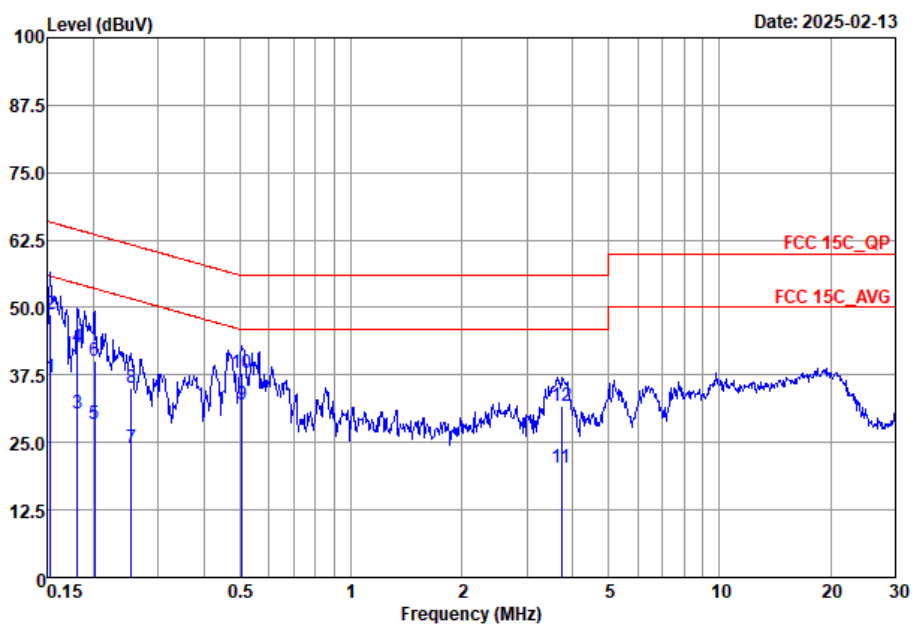


Site : C002-SZ

IMEI : 865317070019635/865317070019627

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	37.05	-18.77	55.82	17.20	9.66	10.19	Average
2 *	0.15	48.85	-16.97	65.82	29.00	9.66	10.19	QP
3	0.18	30.47	-23.95	54.42	10.60	9.69	10.18	Average
4	0.18	42.57	-21.85	64.42	22.70	9.69	10.18	QP
5	0.20	28.49	-25.05	53.54	8.60	9.71	10.18	Average
6	0.20	40.09	-23.45	63.54	20.20	9.71	10.18	QP
7	0.25	24.02	-27.62	51.64	4.10	9.72	10.20	Average
8	0.25	35.12	-26.52	61.64	15.20	9.72	10.20	QP
9	0.51	31.92	-14.08	46.00	12.00	9.68	10.24	Average
10	0.51	37.82	-18.18	56.00	17.90	9.68	10.24	QP
11	3.72	20.23	-25.77	46.00	0.30	9.66	10.27	Average
12	3.72	31.73	-24.27	56.00	11.80	9.66	10.27	QP



Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

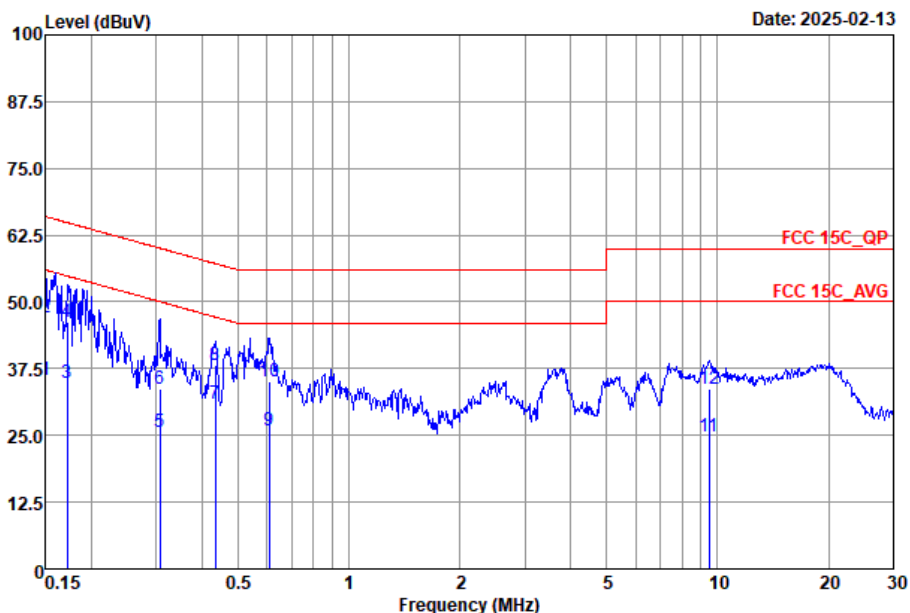

Site : CO02-SZ
Condition : FCC 15C_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	35.34	-20.66	56.00	15.60	9.55	10.19	Average
2	0.15	47.04	-18.96	66.00	27.30	9.55	10.19	QP
3	0.17	34.84	-20.02	54.86	14.90	9.76	10.18	Average
4 *	0.17	46.14	-18.72	64.86	26.20	9.76	10.18	QP
5	0.31	25.56	-24.50	50.06	5.50	9.85	10.21	Average
6	0.31	33.76	-26.30	60.06	13.70	9.85	10.21	QP
7	0.44	30.88	-16.27	47.15	10.90	9.75	10.23	Average
8	0.44	38.08	-19.07	57.15	18.10	9.75	10.23	QP
9	0.61	25.88	-20.12	46.00	6.00	9.64	10.24	Average
10	0.61	35.18	-20.82	56.00	15.30	9.64	10.24	QP
11	9.50	24.93	-25.07	50.00	5.10	9.64	10.19	Average
12	9.50	33.63	-26.37	60.00	13.80	9.64	10.19	QP

Note:

1. $\text{Level(dB}\mu\text{V)} = \text{Read Level(dB}\mu\text{V)} + \text{LISN Factor(dB)} + \text{Cable Loss(dB)}$
2. $\text{Over Limit(dB)} = \text{Level(dB}\mu\text{V)} - \text{Limit Line(dB}\mu\text{V)}$



Appendix C. Radiated Spurious Emission

Test Engineer :	Wenbo Xiao	Relative Humidity :	48~49%
		Temperature :	24°C~25°C



Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	8	Bluetooth BR_GFSK	00	2402	1DH5	-	-
Mode 2	2400-2483.5	8	Bluetooth BR_GFSK	39	2441	1DH5	-	-
Mode 3	2400-2483.5	8	Bluetooth BR_GFSK	78	2480	1DH5	-	-
Mode 1	2400-2483.5	8	Bluetooth BR_GFSK-LF	00	2402	1DH5	-	LF
Mode 4	CO_TX	8	Bluetooth BR_GFSK	00	2402	1DH5	-	-
		1	LTE B13			-	-	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2352.00	43.45	74.00	-30.55	V	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	00	7206.00	64.77	74.00	-9.23	V	Peak	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	64.08	74.00	-9.92	V	Peak	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2486.73	43.37	74.00	-30.63	V	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	4960.00	54.39	74.00	-19.61	V	Peak	Pass	Harmonic
1	Bluetooth BR_GFSK-LF	00	32.91	30.92	40.00	-9.08	V	Peak	Pass	LF
4	Bluetooth BR_GFSK	00	2379.51	43.34	74.00	-30.66	V	PEAK	Pass	Band Edge
4	Bluetooth BR_GFSK	00	7206.00	63.92	74.00	-10.08	H	Peak	Pass	Harmonic

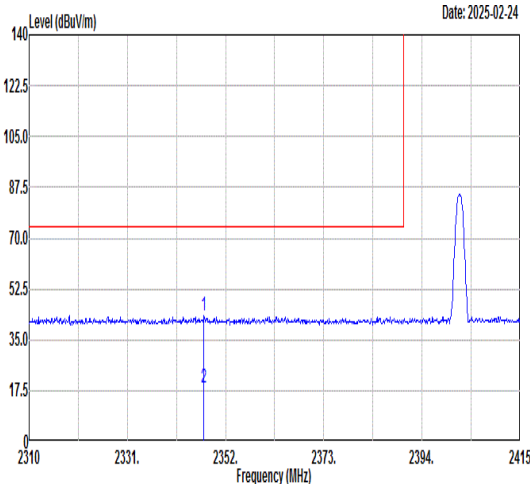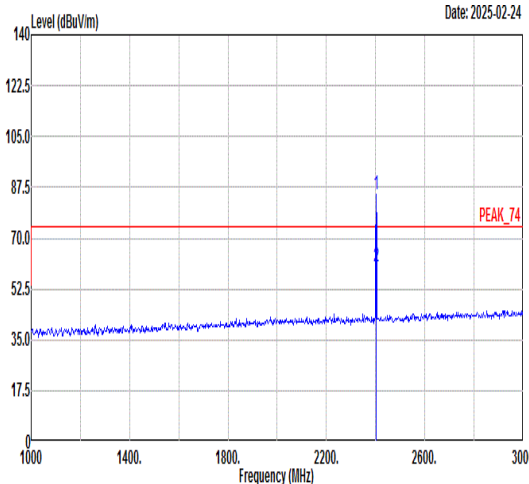

Mode	1																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																			
ANT	8																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																													
Peak																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2347.38</td><td>43.32</td><td>74.00</td><td>-30.68</td><td>41.39</td><td>30.77</td><td>5.32</td><td>34.16</td><td>111</td><td>292</td><td>PEAK</td></tr><tr><td>2</td><td>2347.38</td><td>18.53</td><td>54.00</td><td>-35.47</td><td>16.60</td><td>30.77</td><td>5.32</td><td>34.16</td><td>111</td><td>292</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2347.38	43.32	74.00	-30.68	41.39	30.77	5.32	34.16	111	292	PEAK	2	2347.38	18.53	54.00	-35.47	16.60	30.77	5.32	34.16	111	292	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>85.06</td><td>-----</td><td>-----</td><td>83.05</td><td>30.78</td><td>5.37</td><td>34.14</td><td>111</td><td>292</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>60.27</td><td>-----</td><td>-----</td><td>58.26</td><td>30.78</td><td>5.37</td><td>34.14</td><td>111</td><td>292</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	85.06	-----	-----	83.05	30.78	5.37	34.14	111	292	PEAK	2	2402.00	60.27	-----	-----	58.26	30.78	5.37	34.14	111	292	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	2347.38	43.32	74.00	-30.68	41.39	30.77	5.32	34.16	111	292	PEAK																																																																																																									
2	2347.38	18.53	54.00	-35.47	16.60	30.77	5.32	34.16	111	292	AVERAGE																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	2402.00	85.06	-----	-----	83.05	30.78	5.37	34.14	111	292	PEAK																																																																																																									
2	2402.00	60.27	-----	-----	58.26	30.78	5.37	34.14	111	292	AVERAGE																																																																																																									

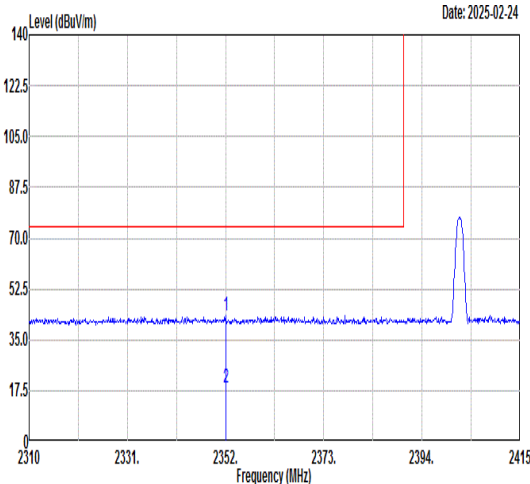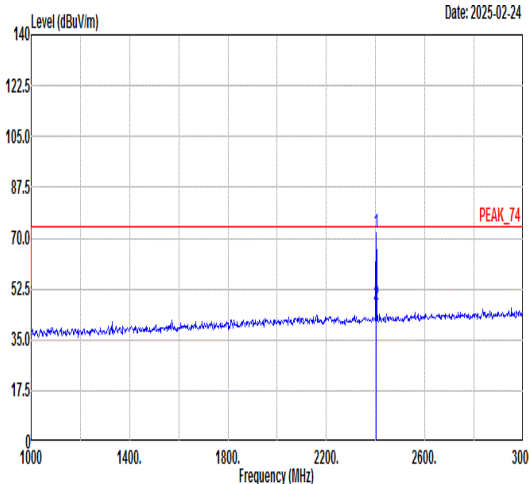

Mode	1																																																																																																																		
	Band Edge																																																																																																																		
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																		
ANT	8																																																																																																																		
Pol.	Vertical						Fundamental																																																																																																												
Peak																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2352.00</td><td>43.45</td><td>74.00</td><td>-30.55</td><td>41.51</td><td>30.77</td><td>5.33</td><td>34.16</td><td>300</td><td>267</td><td>PEAK</td></tr><tr><td>2</td><td>2352.00</td><td>18.66</td><td>54.00</td><td>-35.34</td><td>16.72</td><td>30.77</td><td>5.33</td><td>34.16</td><td>300</td><td>267</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2352.00	43.45	74.00	-30.55	41.51	30.77	5.33	34.16	300	267	PEAK	2	2352.00	18.66	54.00	-35.34	16.72	30.77	5.33	34.16	300	267	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>71.65</td><td>-----</td><td>-----</td><td>69.64</td><td>30.78</td><td>5.37</td><td>34.14</td><td>300</td><td>267</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>46.86</td><td>-----</td><td>-----</td><td>44.85</td><td>30.78</td><td>5.37</td><td>34.14</td><td>300</td><td>267</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	71.65	-----	-----	69.64	30.78	5.37	34.14	300	267	PEAK	2	2402.00	46.86	-----	-----	44.85	30.78	5.37	34.14	300	267	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																										
1	2352.00	43.45	74.00	-30.55	41.51	30.77	5.33	34.16	300	267	PEAK																																																																																																								
2	2352.00	18.66	54.00	-35.34	16.72	30.77	5.33	34.16	300	267	AVERAGE																																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																										
1	2402.00	71.65	-----	-----	69.64	30.78	5.37	34.14	300	267	PEAK																																																																																																								
2	2402.00	46.86	-----	-----	44.85	30.78	5.37	34.14	300	267	AVERAGE																																																																																																								





Mode	1										
	Harmonic										
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz										
ANT	8										
Pol.	Horizontal										Vertical
Peak Avg	Data: 1 Level (dBuV/m) <										



Mode	2																																																																																																																																																																			
	Harmonic																																																																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																																			
ANT	8																																																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2025-02-25 PEAK_74 AVG_54						Level (dBuV/m) Date: 2025-02-25 PEAK_74 AVG_54																																																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>47.96</td><td>74.00</td><td>-26.04</td><td>67.57</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>23.17</td><td>54.00</td><td>-30.83</td><td>42.78</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>60.59</td><td>74.00</td><td>-13.41</td><td>78.53</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>35.80</td><td>54.00</td><td>-18.20</td><td>53.74</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	47.96	74.00	-26.04	67.57	36.51	8.70	64.82	---	---	Peak	2	4882.00	23.17	54.00	-30.83	42.78	36.51	8.70	64.82	---	---	Average	3	7323.00	60.59	74.00	-13.41	78.53	36.88	10.18	65.00	---	---	Peak	4	7323.00	35.80	54.00	-18.20	53.74	36.88	10.18	65.00	---	---	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>53.08</td><td>74.00</td><td>-20.92</td><td>72.69</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>28.29</td><td>54.00</td><td>-25.71</td><td>47.90</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>64.08</td><td>74.00</td><td>-9.92</td><td>82.02</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>39.29</td><td>54.00</td><td>-14.71</td><td>57.23</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	53.08	74.00	-20.92	72.69	36.51	8.70	64.82	---	---	Peak	2	4882.00	28.29	54.00	-25.71	47.90	36.51	8.70	64.82	---	---	Average	3	7323.00	64.08	74.00	-9.92	82.02	36.88	10.18	65.00	---	---	Peak	4	7323.00	39.29	54.00	-14.71	57.23	36.88	10.18	65.00	---	---	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	4882.00	47.96	74.00	-26.04	67.57	36.51	8.70	64.82	---	---	Peak																																																																																																																																																									
2	4882.00	23.17	54.00	-30.83	42.78	36.51	8.70	64.82	---	---	Average																																																																																																																																																									
3	7323.00	60.59	74.00	-13.41	78.53	36.88	10.18	65.00	---	---	Peak																																																																																																																																																									
4	7323.00	35.80	54.00	-18.20	53.74	36.88	10.18	65.00	---	---	Average																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																											
1	4882.00	53.08	74.00	-20.92	72.69	36.51	8.70	64.82	---	---	Peak																																																																																																																																																									
2	4882.00	28.29	54.00	-25.71	47.90	36.51	8.70	64.82	---	---	Average																																																																																																																																																									
3	7323.00	64.08	74.00	-9.92	82.02	36.88	10.18	65.00	---	---	Peak																																																																																																																																																									
4	7323.00	39.29	54.00	-14.71	57.23	36.88	10.18	65.00	---	---	Average																																																																																																																																																									

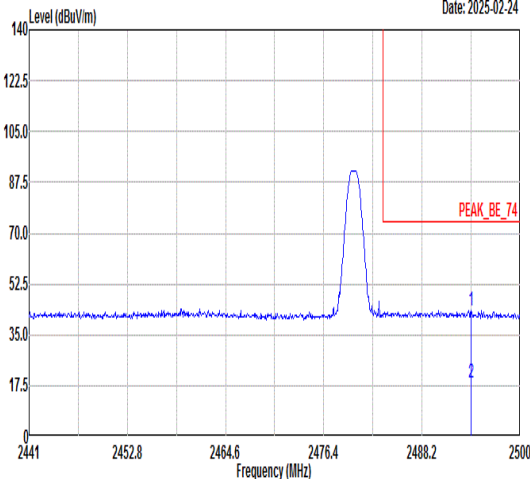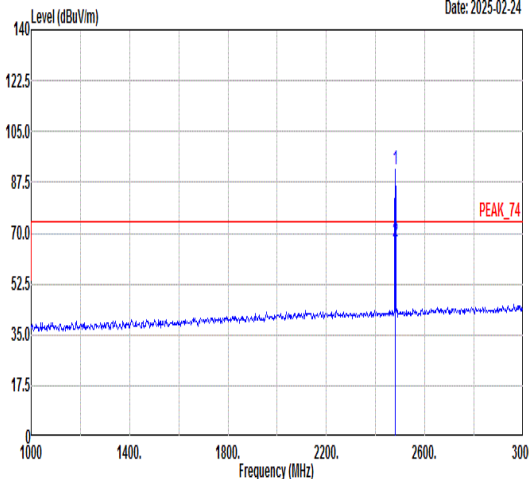

Mode	3																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																			
ANT	8																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																													
Peak																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2494.10</td><td>43.35</td><td>74.00</td><td>-30.65</td><td>41.18</td><td>30.80</td><td>5.47</td><td>34.10</td><td>343</td><td>288</td><td>PEAK</td></tr><tr><td>2</td><td>2494.10</td><td>18.56</td><td>54.00</td><td>-35.44</td><td>16.39</td><td>30.80</td><td>5.47</td><td>34.10</td><td>343</td><td>288</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2494.10	43.35	74.00	-30.65	41.18	30.80	5.47	34.10	343	288	PEAK	2	2494.10	18.56	54.00	-35.44	16.39	30.80	5.47	34.10	343	288	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>91.84</td><td>-----</td><td>-----</td><td>89.69</td><td>30.80</td><td>5.46</td><td>34.11</td><td>343</td><td>288</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>67.05</td><td>-----</td><td>-----</td><td>64.90</td><td>30.80</td><td>5.46</td><td>34.11</td><td>343</td><td>288</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	91.84	-----	-----	89.69	30.80	5.46	34.11	343	288	PEAK	2	2480.00	67.05	-----	-----	64.90	30.80	5.46	34.11	343	288	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	2494.10	43.35	74.00	-30.65	41.18	30.80	5.47	34.10	343	288	PEAK																																																																																																									
2	2494.10	18.56	54.00	-35.44	16.39	30.80	5.47	34.10	343	288	AVERAGE																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	2480.00	91.84	-----	-----	89.69	30.80	5.46	34.11	343	288	PEAK																																																																																																									
2	2480.00	67.05	-----	-----	64.90	30.80	5.46	34.11	343	288	AVERAGE																																																																																																									





Mode	3																																																																																																																						
	Band Edge																																																																																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																						
ANT	8																																																																																																																						
Pol.	Vertical						Fundamental																																																																																																																
Peak	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz)						Level (dBuV/m) Date: 2025-02-24 Frequency (MHz)																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2486.73</td><td>43.37</td><td>74.00</td><td>-30.63</td><td>41.22</td><td>30.80</td><td>5.46</td><td>34.11</td><td>272</td><td>251</td><td>PEAK</td></tr><tr><td>2</td><td>2486.73</td><td>18.58</td><td>54.00</td><td>-35.42</td><td>16.43</td><td>30.80</td><td>5.46</td><td>34.11</td><td>272</td><td>251</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2486.73	43.37	74.00	-30.63	41.22	30.80	5.46	34.11	272	251	PEAK	2	2486.73	18.58	54.00	-35.42	16.43	30.80	5.46	34.11	272	251	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>89.84</td><td>-----</td><td>-----</td><td>87.69</td><td>30.80</td><td>5.46</td><td>34.11</td><td>272</td><td>251</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>65.05</td><td>-----</td><td>-----</td><td>62.90</td><td>30.80</td><td>5.46</td><td>34.11</td><td>272</td><td>251</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2480.00	89.84	-----	-----	87.69	30.80	5.46	34.11	272	251	PEAK	2	2480.00	65.05	-----	-----	62.90	30.80	5.46	34.11	272	251	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	2486.73	43.37	74.00	-30.63	41.22	30.80	5.46	34.11	272	251	PEAK																																																																																																												
2	2486.73	18.58	54.00	-35.42	16.43	30.80	5.46	34.11	272	251	AVERAGE																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	2480.00	89.84	-----	-----	87.69	30.80	5.46	34.11	272	251	PEAK																																																																																																												
2	2480.00	65.05	-----	-----	62.90	30.80	5.46	34.11	272	251	AVERAGE																																																																																																												



Mode	3																																																																																																																																																																																
	Harmonic																																																																																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																																
ANT	8																																																																																																																																																																																
Pol.	Horizontal										Vertical																																																																																																																																																																						
Peak Avg	Level (dBuV/m) Date: 2025-02-25 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4960.00</td><td>51.54</td><td>74.00</td><td>-22.46</td><td>71.25</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>26.75</td><td>54.00</td><td>-27.25</td><td>46.46</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>53.42</td><td>74.00</td><td>-20.58</td><td>71.46</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>28.63</td><td>54.00</td><td>-25.37</td><td>46.67</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Average</td></tr></table>												Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	51.54	74.00	-22.46	71.25	36.64	8.46	64.81	---	---	Peak	2	4960.00	26.75	54.00	-27.25	46.46	36.64	8.46	64.81	---	---	Average	3	7440.00	53.42	74.00	-20.58	71.46	36.76	10.17	64.97	---	---	Peak	4	7440.00	28.63	54.00	-25.37	46.67	36.76	10.17	64.97	---	---	Average	Level (dBuV/m) Date: 2025-02-25 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4960.00</td><td>54.39</td><td>74.00</td><td>-19.61</td><td>74.10</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>29.60</td><td>54.00</td><td>-24.40</td><td>49.31</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>52.67</td><td>74.00</td><td>-21.33</td><td>70.71</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>27.88</td><td>54.00</td><td>-26.12</td><td>45.92</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Average</td></tr></table>			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	54.39	74.00	-19.61	74.10	36.64	8.46	64.81	---	---	Peak	2	4960.00	29.60	54.00	-24.40	49.31	36.64	8.46	64.81	---	---	Average	3	7440.00	52.67	74.00	-21.33	70.71	36.76	10.17	64.97	---	---	Peak	4	7440.00	27.88	54.00	-26.12	45.92	36.76	10.17	64.97	---	---	Average
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																							
	1	4960.00	51.54	74.00	-22.46	71.25	36.64	8.46	64.81	---	---	Peak																																																																																																																																																																					
2	4960.00	26.75	54.00	-27.25	46.46	36.64	8.46	64.81	---	---	Average																																																																																																																																																																						
3	7440.00	53.42	74.00	-20.58	71.46	36.76	10.17	64.97	---	---	Peak																																																																																																																																																																						
4	7440.00	28.63	54.00	-25.37	46.67	36.76	10.17	64.97	---	---	Average																																																																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																								
1	4960.00	54.39	74.00	-19.61	74.10	36.64	8.46	64.81	---	---	Peak																																																																																																																																																																						
2	4960.00	29.60	54.00	-24.40	49.31	36.64	8.46	64.81	---	---	Average																																																																																																																																																																						
3	7440.00	52.67	74.00	-21.33	70.71	36.76	10.17	64.97	---	---	Peak																																																																																																																																																																						
4	7440.00	27.88	54.00	-26.12	45.92	36.76	10.17	64.97	---	---	Average																																																																																																																																																																						

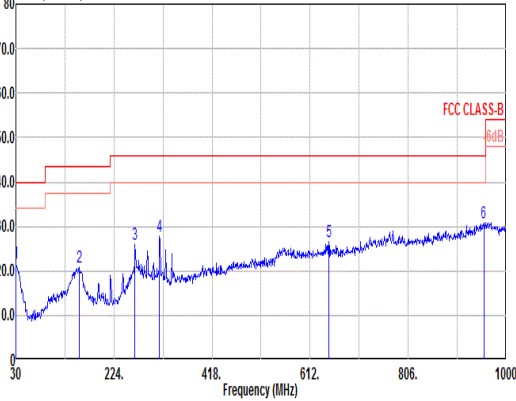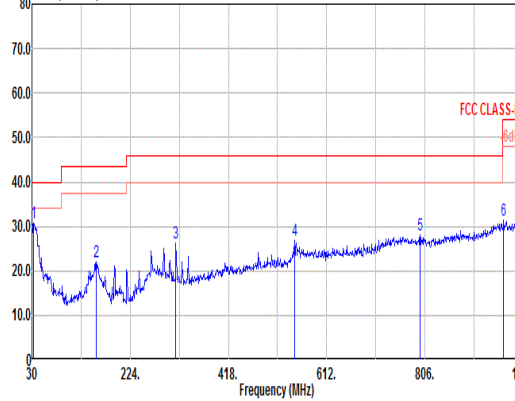

Mode	1																																																																																																																																																																																																																																					
	LF																																																																																																																																																																																																																																					
	2400-2483.5_Bluetooth BR_GFSK-LF_CH00_2402MHz																																																																																																																																																																																																																																					
ANT	8																																																																																																																																																																																																																																					
Pol.	Horizontal																																																																																																																																																																																																																																					
Peak	Level (dBuV/m) Date: 2025-02-25  Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red line for the FCC CLASS-B limit and a blue line for the measured signal. The signal is below the limit across the entire frequency range. The plot is dated 2025-02-25. <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>30.00</td><td>21.73</td><td>40.00</td><td>-18.27</td><td></td><td>27.41</td><td>25.29</td><td>0.53</td><td>31.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>155.13</td><td>20.78</td><td>43.50</td><td>-22.72</td><td></td><td>34.32</td><td>16.78</td><td>1.27</td><td>31.59</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>265.71</td><td>25.95</td><td>46.00</td><td>-20.05</td><td></td><td>36.45</td><td>19.33</td><td>1.70</td><td>31.53</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>314.21</td><td>27.84</td><td>46.00</td><td>-18.16</td><td></td><td>37.92</td><td>19.64</td><td>1.85</td><td>31.57</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>648.86</td><td>26.45</td><td>46.00</td><td>-19.55</td><td></td><td>28.24</td><td>26.76</td><td>2.65</td><td>31.20</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>955.38</td><td>30.65</td><td>46.00</td><td>-15.35</td><td></td><td>26.60</td><td>31.64</td><td>3.24</td><td>30.83</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg		1	30.00	21.73	40.00	-18.27		27.41	25.29	0.53	31.50	---	---	Peak	2	155.13	20.78	43.50	-22.72		34.32	16.78	1.27	31.59	---	---	Peak	3	265.71	25.95	46.00	-20.05		36.45	19.33	1.70	31.53	---	---	Peak	4	314.21	27.84	46.00	-18.16		37.92	19.64	1.85	31.57	---	---	Peak	5	648.86	26.45	46.00	-19.55		28.24	26.76	2.65	31.20	---	---	Peak	6	955.38	30.65	46.00	-15.35		26.60	31.64	3.24	30.83	---	---	Peak	Level (dBuV/m) Date: 2025-02-25  Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red line for the FCC CLASS-B limit and a blue line for the measured signal. The signal is below the limit across the entire frequency range. The plot is dated 2025-02-25. <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>32.91</td><td>30.92</td><td>40.00</td><td>-9.08</td><td></td><td>38.24</td><td>23.75</td><td>0.55</td><td>31.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>157.07</td><td>21.91</td><td>43.50</td><td>-21.59</td><td></td><td>35.55</td><td>16.67</td><td>1.28</td><td>31.59</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>314.21</td><td>26.20</td><td>46.00</td><td>-19.80</td><td></td><td>36.28</td><td>19.64</td><td>1.85</td><td>31.57</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>547.98</td><td>26.79</td><td>46.00</td><td>-19.21</td><td></td><td>29.55</td><td>26.09</td><td>2.45</td><td>31.30</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>796.30</td><td>28.15</td><td>46.00</td><td>-17.85</td><td></td><td>27.50</td><td>28.81</td><td>2.93</td><td>31.09</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>961.20</td><td>31.40</td><td>54.00</td><td>-22.60</td><td></td><td>27.21</td><td>31.76</td><td>3.25</td><td>30.82</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg		1	32.91	30.92	40.00	-9.08		38.24	23.75	0.55	31.62	---	---	Peak	2	157.07	21.91	43.50	-21.59		35.55	16.67	1.28	31.59	---	---	Peak	3	314.21	26.20	46.00	-19.80		36.28	19.64	1.85	31.57	---	---	Peak	4	547.98	26.79	46.00	-19.21		29.55	26.09	2.45	31.30	---	---	Peak	5	796.30	28.15	46.00	-17.85		27.50	28.81	2.93	31.09	---	---	Peak	6	961.20	31.40	54.00	-22.60		27.21	31.76	3.25	30.82	---	---	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																									
		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																										
	1	30.00	21.73	40.00	-18.27		27.41	25.29	0.53	31.50	---	---	Peak																																																																																																																																																																																																																									
	2	155.13	20.78	43.50	-22.72		34.32	16.78	1.27	31.59	---	---	Peak																																																																																																																																																																																																																									
	3	265.71	25.95	46.00	-20.05		36.45	19.33	1.70	31.53	---	---	Peak																																																																																																																																																																																																																									
	4	314.21	27.84	46.00	-18.16		37.92	19.64	1.85	31.57	---	---	Peak																																																																																																																																																																																																																									
	5	648.86	26.45	46.00	-19.55		28.24	26.76	2.65	31.20	---	---	Peak																																																																																																																																																																																																																									
	6	955.38	30.65	46.00	-15.35		26.60	31.64	3.24	30.83	---	---	Peak																																																																																																																																																																																																																									
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																											
1	32.91	30.92	40.00	-9.08		38.24	23.75	0.55	31.62	---	---	Peak																																																																																																																																																																																																																										
2	157.07	21.91	43.50	-21.59		35.55	16.67	1.28	31.59	---	---	Peak																																																																																																																																																																																																																										
3	314.21	26.20	46.00	-19.80		36.28	19.64	1.85	31.57	---	---	Peak																																																																																																																																																																																																																										
4	547.98	26.79	46.00	-19.21		29.55	26.09	2.45	31.30	---	---	Peak																																																																																																																																																																																																																										
5	796.30	28.15	46.00	-17.85		27.50	28.81	2.93	31.09	---	---	Peak																																																																																																																																																																																																																										
6	961.20	31.40	54.00	-22.60		27.21	31.76	3.25	30.82	---	---	Peak																																																																																																																																																																																																																										



Mode	4																																																															
	Band Edge																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz+LTE B13 Link CO_TX																																																															
ANT	8																																																															
Pol.	Horizontal																																																															
Peak	Fundamental																																																															
	Date: 2025-02-25																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2363.13</td><td>43.06</td><td>74.00</td><td>-30.94</td><td>41.10</td><td>30.77</td><td>5.34</td><td>34.15</td><td>291</td><td>299</td><td>PEAK</td></tr><tr><td>2</td><td>2363.13</td><td>18.27</td><td>54.00</td><td>-35.73</td><td>16.31</td><td>30.77</td><td>5.34</td><td>34.15</td><td>291</td><td>299</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2363.13	43.06	74.00	-30.94	41.10	30.77	5.34	34.15	291	299	PEAK	2	2363.13	18.27	54.00	-35.73	16.31	30.77	5.34	34.15	291	299	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	2363.13	43.06	74.00	-30.94	41.10	30.77	5.34	34.15	291	299	PEAK																																																					
2	2363.13	18.27	54.00	-35.73	16.31	30.77	5.34	34.15	291	299	AVERAGE																																																					
	Date: 2025-02-25																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>88.51</td><td>-----</td><td>-----</td><td>86.50</td><td>30.78</td><td>5.37</td><td>34.14</td><td>291</td><td>299</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>63.72</td><td>-----</td><td>-----</td><td>61.71</td><td>30.78</td><td>5.37</td><td>34.14</td><td>291</td><td>299</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	88.51	-----	-----	86.50	30.78	5.37	34.14	291	299	PEAK	2	2402.00	63.72	-----	-----	61.71	30.78	5.37	34.14	291	299	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	2402.00	88.51	-----	-----	86.50	30.78	5.37	34.14	291	299	PEAK																																																					
2	2402.00	63.72	-----	-----	61.71	30.78	5.37	34.14	291	299	AVERAGE																																																					



Mode	4																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz+LTE B13 Link CO_TX																																																																																																																			
ANT	8																																																																																																																			
Pol.	Vertical						Fundamental																																																																																																													
Peak	Level (dBuV/m) Date: 2025-02-25 Frequency (MHz)						Level (dBuV/m) Date: 2025-02-25 Frequency (MHz)																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2379.51</td><td>43.34</td><td>74.00</td><td>-30.66</td><td>41.36</td><td>30.78</td><td>5.35</td><td>34.15</td><td>194</td><td>263</td><td>PEAK</td></tr><tr><td>2</td><td>2379.51</td><td>18.55</td><td>54.00</td><td>-35.45</td><td>16.57</td><td>30.78</td><td>5.35</td><td>34.15</td><td>194</td><td>263</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2379.51	43.34	74.00	-30.66	41.36	30.78	5.35	34.15	194	263	PEAK	2	2379.51	18.55	54.00	-35.45	16.57	30.78	5.35	34.15	194	263	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>83.66</td><td>-----</td><td>-----</td><td>81.65</td><td>30.78</td><td>5.37</td><td>34.14</td><td>194</td><td>263</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>58.87</td><td>-----</td><td>-----</td><td>56.86</td><td>30.78</td><td>5.37</td><td>34.14</td><td>194</td><td>263</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	83.66	-----	-----	81.65	30.78	5.37	34.14	194	263	PEAK	2	2402.00	58.87	-----	-----	56.86	30.78	5.37	34.14	194	263	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	2379.51	43.34	74.00	-30.66	41.36	30.78	5.35	34.15	194	263	PEAK																																																																																																									
2	2379.51	18.55	54.00	-35.45	16.57	30.78	5.35	34.15	194	263	AVERAGE																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	2402.00	83.66	-----	-----	81.65	30.78	5.37	34.14	194	263	PEAK																																																																																																									
2	2402.00	58.87	-----	-----	56.86	30.78	5.37	34.14	194	263	AVERAGE																																																																																																									




Mode	4									
	Harmonic									
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz+LTE B13 Link CO_TX									
ANT	8									
Pol.	Horizontal					Vertical				
Peak Avg	Data: 1 Level (dBuV/m) <									


Note: The frequency point over limit line is LTE Band 13 RF signal which can be ignored.

Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

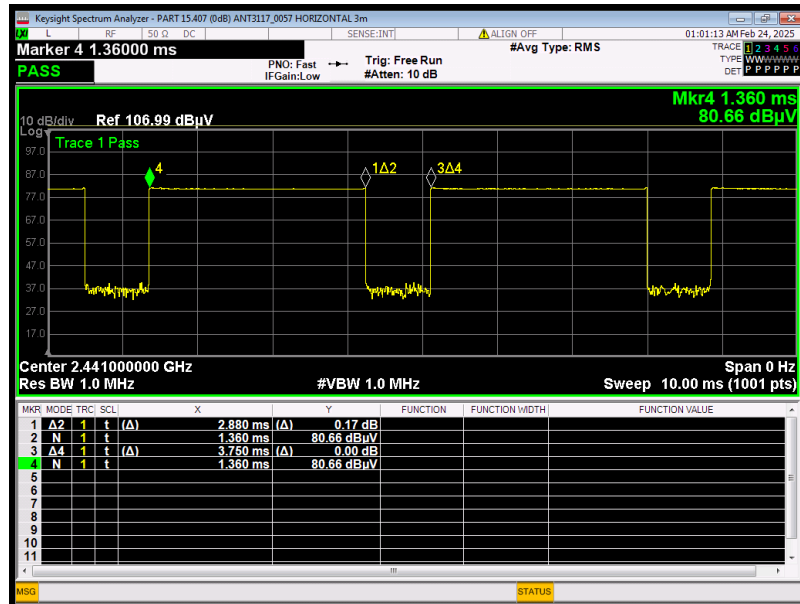

DH5 on time (Count Pulses) Plot on Channel 39

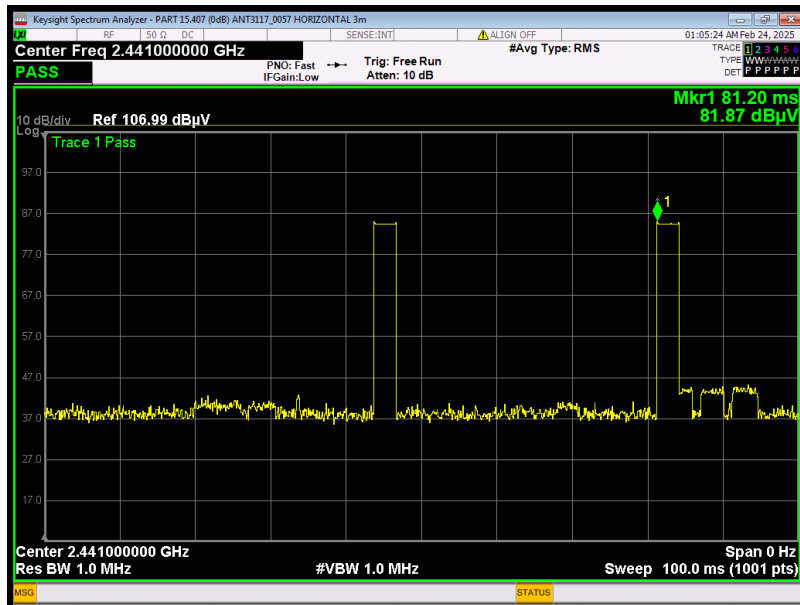

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.