


# Footloose Auto Cat Toilet

User Manual

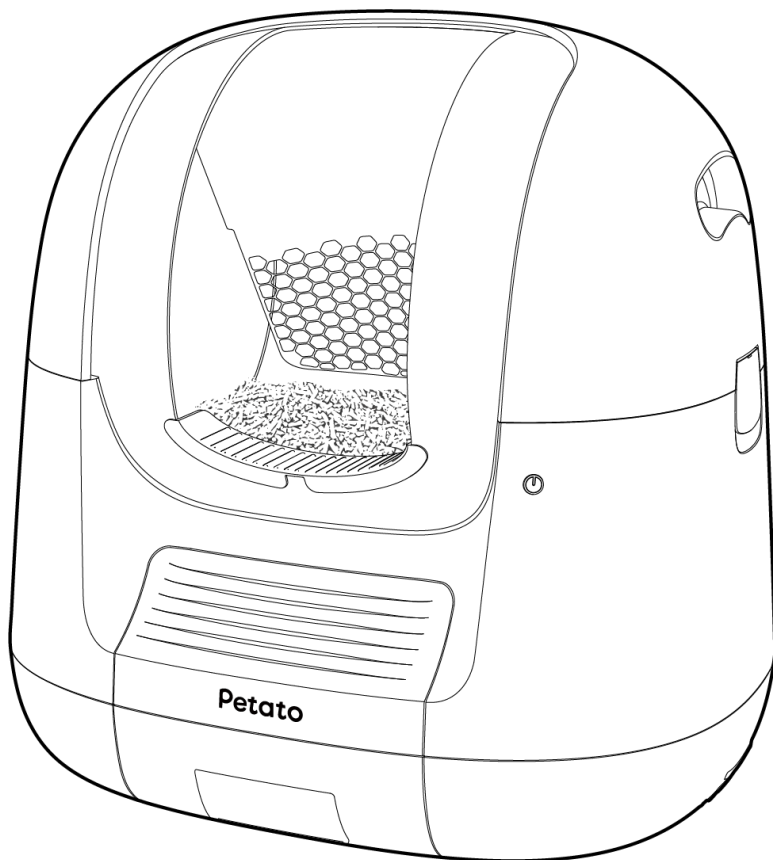


# Petato

Petopia in the making.




# In the Box

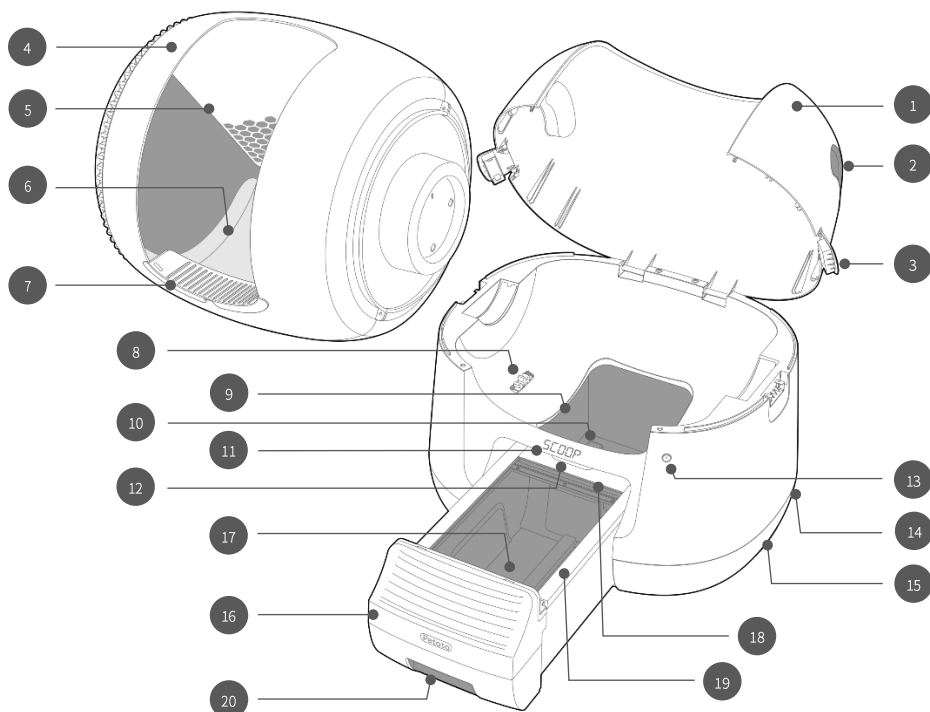


- |                |                       |                        |                    |
|----------------|-----------------------|------------------------|--------------------|
| 1. Cover       | 6. Anti-stick coating | 11. Display            | 16. Receptacle     |
| 2. Handle      | 7. Entry step         | 12. Motion sensor      | 17. Liner          |
| 3. Clamp       | 8. Motor              | 13. LED button         | 18. Deodor film    |
| 4. Chamber     | 9. Waste sensor       | 14. Power port         | 19. Track cover    |
| 5. Sift screen | 10. Weight sensor     | 15. Anti-slippery grip | 20. Contact switch |

## Accessories


Power adapter x1



Litter Trapping Mat x1



Scratching Ramp x1




# Setup

Please follow the setup instructions below after opening the box.

---


**1. Plug in Footloose and the LED button will turn green.**



---


**2. Install the Petato App.**

\* Available on iOS and Android




---

**3. Follow the in-app steps to set up the Wi-Fi network for your Footloose.**

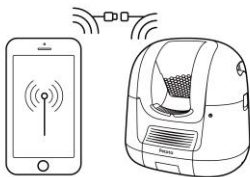

---

**4. Create a profile for your cats.**



---

**5. Top up fresh litter and familiarize your cats with the new litter box.**



---

**6. Start enjoying a scoop-free life.**



# Onboard Interface

## Display

XXX	SCOOP	PAUSE
Counting down XXX seconds	Cleaning in progress	Scoop/Clear is paused
DETECT	CLEAR	OPEN
Virtual fencing is activated	Discarding all the litter	Receptacle is taken out
FULL	RETURN	WIFI
Receptacle is full	Returning to home position	Setting up Wi-Fi connection
SLEEP	LOCK	UPDATE
Currently in sleep mode	Child lock in use	Updating the firmware

Note: the “X” in “XXX” represents a digit number

## Button

Actions	Operations
Single Press	Scoop or pause
Double Press	Clear
Press & Hold for 3 secs	Activate Wi-Fi setup (Smart Mode)
Press & Hold for 3 secs (while receptacle is OPEN)	Reset receptacle weight sensors

- Note: 1. You may turn on the Child Lock in the Petato App to deactivate the button.
2. Footloose will first run a Return cycle if the chamber is not at home position.
3. To switch to AP Mode, press the button while Footloose is setting up Wi-Fi.


## LED Indicator

Light Color	Device Status	Display
Solid Green	Startup, offline	Null
Fast Pulsing Green (1 pulse per sec)	Setting up Wi-Fi (Smart Mode by default)	“WIFI”
Slow Pulsing Green (1 pulse every 2 secs)	Setting up Wi-Fi (AP Mode)	“WIFI”
Solid Blue	Online, standby	Null
Pulsing Blue	Update failure, please try again	Null
Pulsing Red	Receptacle is full	“FULL”

# Maintenance

For the best performance and maximum lifespan of Footloose, please do the following maintenance regularly.


## 1. Empty the receptacle (as soon as the receptacle is full)



Pull out the receptacle.



Switch off the lock.

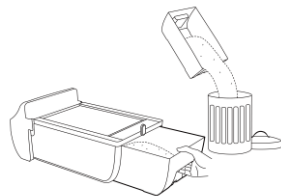


Discard the waste.

## 2. Deep clean the chamber (at least once per month)



Open the cover and  
remove the chamber.



Rinse the sift screen and  
chamber (do NOT use  
solutions or sharp object,  
or it may cause permanent  
damage to the anti-stick  
coatings).




Install the chamber  
(opening facing the front)  
and top up fresh litter. The  
chamber will return to  
home position before next  
rotation.

### 3. Replace the deodor film (when it corrupts, usually once a year)



Pull out the receptacle.



Open the track cover and slide cover (make sure the film is fully stretched).




Unscrew the three screws and take out the old film.



Install a new film and screw the screws.



Secure the new film into the trough and make sure the two gears are engaged.



Reinstall the track and slide cover (make sure the side of the slide cover fits)

# Safety Instructions

- Please place the device on rigid surface. Avoid contacting the litter trapping mat, or it may lead to incorrect weight measurement.
- Do NOT disassemble, change or modify the device other than components as instructed in the user manual.
- Do NOT drop or clash the device.
- Do NOT use the device at extreme temperatures ( $>50^{\circ}\text{C}$  or  $<-20^{\circ}\text{C}$ ).
- Though the parts are moisture-, salt spray- and fungus-proofing, do NOT expose the device to salt spray or humid environment.
- Do NOT submerge or expose the device to water or cleaning solutions.
- Do NOT apply any corrosive solutions onto the device.
- Empty the receptacle at least once every week.
- Do NOT take out the receptacle while the device is rotating, or it may cause redundant or erroneous rotations.
- When the receptacle is open, beware of small pets getting into the device.
- Do NOT let pets bite the cords.
- Do NOT allow juveniles to use the device without supervision. Please turn on Child Lock if there is small child nearby.
- Do NOT open the track covers if the deodor film cannot be fully closed. Please reach out to Customer Support immediately.
- If “ERRXXX” is shown on the display, please reboot the device. Please reach out to Customer Support if the glitch persists.
- Due to the change of mass center, there might be an error within 1kg to the weight measurement during the rotation of the chamber. Therefore, please prevent small cats of 1kg or less from using the device.
- Please top up 4~8L (approximately 4~8kg) cat litter but do NOT exceed the “MAX” mark in the chamber.
- Do NOT trigger the Clear function if there is no one onsite. The Clear function will clear all the cat litter inside the chamber. Thus, the device needs to be topped up before getting back to work.



# Warranty

## One Year Non-Transferable Limited Warranty

This Product has the benefit of a one (1) year non-transferable limited manufacturer' s warranty.

**What is covered:** Shenzhen Petato Technology Co., Ltd., owner of the Petato Brand, (hereinafter referred to as “Petato” ) warrants to the original retail consumer purchaser, and not any other purchaser or subsequent owner, that its Petato product, when subject to normal and proper residential use, will be free from defects in material or workmanship for a period of one (1) year from the purchase date. An “original retail consumer purchaser” is a person or entity who originally purchases the product, or a gift recipient of a new product that is unopened and in its original packaging. When serviced by Customer Support, Petato covers labor and parts for the first year of ownership; after the first year, a service or upgrade charge will apply relative to replacement of the product, with new or refurbished items at Petato' s sole discretion. The limited warranty is non-transferable and shall automatically terminate if the original retail consumer purchaser resells the product or transfers the property on which the product is installed. In the event of defect, these are your exclusive remedies.

**Proper Product Use:** This product is designed as a system for the automatic removal of cat waste and only for use with domesticated animals; do not use this product for any other purpose. However, the specific temperament of your animal may not work with this product. We recommend that you do not use this product if your animal is aggressive. If you are unsure whether this product is appropriate for your animal, please consult with your veterinarian or certified trainer before you use this product.

**What is not covered:** This non-transferable limited warranty does not provide protection against, and Petato will have no liability under this non-transferable limited warranty for any damage to or defects in the products caused by any animal, loss or product(s), failure, defect or damage caused by events and situations beyond normal residential exposure conditions, including, but not limited to: commercial use, misuse, abuse, neglect, improper installation or installation not in accordance with Petato instructions, use of non-Petato accessories, impacts of foreign objects, acts of God, abnormal or improper use, improper storage, attempted repair or service by anyone other than Petato Customer Support, accident, alteration, defects in or failure of the surface the product is installed in or upon, discoloration or other damage caused by pollution, sunlight, other environmental conditions, mold, dirt, mildew, or exposure to harmful chemicals and any other cause not involving manufacturing defects in the product.

#### FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.