



MODEL: V700/V710

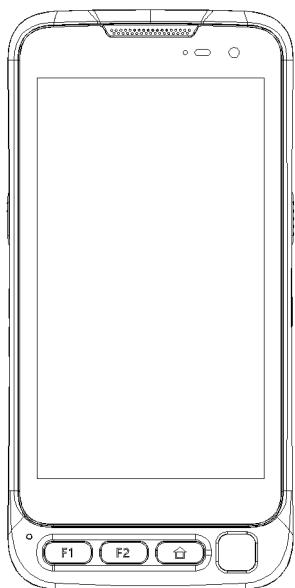

USER MANUAL

1. KeybuttonsInstruction

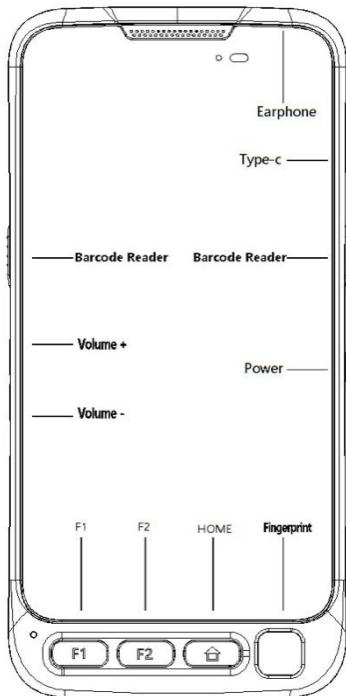

1.1 Power button :

Long press the Power button to turn-on device.
When turn on, it will take a little bit of your time to
finish some settings like language, time zone, wifi,
etc.

In any interface, press power button one second
into lock and unlock interface. Long press
10seconds power button to force shutdown, press 2
seconds to find “**restart**” and “**screenshot**”.


1.2 Volume button :

Press up/down to adjust media, call, notifications
volume. To adjust ring, alarm volume etc, go to
settings.

1.3 Barcode scanning button:

There are 2 barcode scanning buttons on left and
right sides of device which is orange.
When it's off, Long press any of scanning buttons
3seconds to activate scanner. Short press
scanning button to scan codes.(noted: before
scanning, you should open a dialog box and put it
in the typing status , the code information will show

in the dialog box. Please reference the pictures as below)

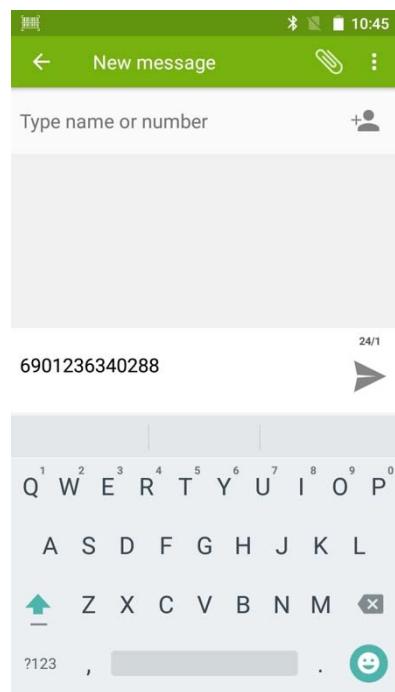

1.4 Physical button (from left to right)

F1 : Long press to open Google search, short press to open settings.

F2:Long press to view current items, short press to open camera.

If you want to change key functions, go to settings->KeyEvent

Home button: Short press to go back to home screen

1.5 Combination key

Press the volume down key and the power key at the same time for two seconds to complete screen shot.

2. Touch buttons (from left to right)

Menu: open interface of current items

Home screen: back to home screen

Return Back: back to last interface or exit current program.

3. Fingerprint

it could be used to unlock the device, or wake up the locked interface. Setting → security&location → fingerprint choose the lock method you preferred.

4. Install SIM card, TF card

Please turn off device before you install or take out the SIM cards or TF card

Find the screwdriver in giftbox, use it to open the battery cover, take out the battery, insert SIM cards according to hints.

Both SIM card slots support 4G LTE, but if insert two sim cards at the same time, sim slot 1 supports 4G LTE, sim slot 2 supports 2G only.

5. Status Icon

	E: GSM 3G: WCDMA 4G: 4G LTE		Notification
	Call forwarding		Play music
	Miss calling		Connected WLAN
	New SMS or MMS		Calling out
	Alarm Clock		Airplane mode
	Vibration mode		Silent
	Bluetooth		Battery capacity

	Connect to PC		Barcode reader on
	Connected earphone		Charging

6. Apps & Notifications

6.1 Apps

When in homepage, tab and slide up to find all related apps. Tab return icon on the bottom of the screen to return to homepage.

Setting->apps & notifications, check recently opened apps and default apps. Setting up app permissions like location, microphone, camera, etc.

6.2 Notifications

Notification will include new message, Calendar events or ongoing events, such as in caller diverting or in calling status. You could also open notification to check phone operator or open message, reminder or events notification. When there is a new notification. Below operations could be done after you slide it down to open the notification

*Tab the notification to open relating app.

*Tab and press the bottom then slide up to shut down

the notification.

6.2 Unknown sources

Setting->apps¬ifications->special app access->install unknown apps, setting if it's allowed to download application from non-electric market. When your setting is allowed, your phone and personal data will be easy to be attacked by applications of unknown sources, you will be responsible for the loss because of these applications.

7. Home page management

7.1 Expand the homepage

Main interface to go beyond the screen width for more spaces in which new shortcuts, widgets and more other items can be added. In addition, users can horizontally swipe their fingers at the homepage screen to move to the left or right of the expanded the homepage interface.

Choosing widgets, add whichever one you want to show in the homepage, it will automatically in the blank space of homepage.

When in homepage interface, tab and pin any app icon, to drag it to the blank space of homepage.

7.2 Move homepage interface icons:

1. Tabbing and pin the icon till device vibration
2. Stay still of your finger and drag the icon to the place where you want it to be on the homepage.

7.3 Remove homepage interface icons.

1. Tabbing and pin the icon till device vibration
2. Stay still of your finger, drag the icon to “remove”

When all the icons and widgets in the homepage been deleted, this homepage will be deleted automatically.

8. Wireless and network**8.1 SIM :**

Setting SIM1 or SIM 2 card turn on/off which in the menu settings→Network&internet-->SIM cards.

When in dual standby mode, choose preferred carrier in settings->Network&Internet->Sim cards->preferred sim for

8.2 SIM cards application

Please find the SIM toolkit menu in the main system to understand more information

8.3 Wi-Fi

Settings→Network&internet-» Wi-Fi-» turn on-> choose the Wi-Fi name and input the password to connect to Wi-Fi

8.4 Bluetooth

Settings→Connected devices→Connection preferences→Bluetooth→turn on →choose the one of available devices to pair.

More :

Airplane mode: there is no any service after you turn on the function.

8.5VPN

Add VPN in setting->Network&Internet->VPN

8.6 Hot spot & Tethering

Allow the equipment of wireless network without through wireless router connected to each other (Wi-Fi hotspots)

Share your mobile connection via USB(USB sharing network)

Share phone's internet connection via Bluetooth

8.7 Mobile network

Check data usage , open or close 4G/3G service , change network mode,access point name , select a network provider in operators

9. Display

Setting device display brightness, wallpaper, Auto Rotate Screen, sleeping mode, font sizeand other display function.

10. Storage

CheckSD card and relevant display information of mobile phone, can download or format SD card.

11. **Battery:** Show the usage of battery capacity.

12. **Apps&Notification:** Manage and delete installed applications, app permissions, set up app notifications, Check and control storage usage of running service and apps.

13. Gesture: System-->Gestures, this is for setting up preventing ringing when press Power & Volume up together

14. Security & Location

14.1 Security status

Check device for harmful behavior, security patch update; locate your device and keep your data safe through Find My Device.

14.2 Device Security

Choose your preferred screen lock method: swipe, Pattern, PIN or Password to secure start up.

Set up notifications or message on lock screen or add users from lock screen.

Set up fingerprint as unlock option

If you want device unlocked when it's near you, go to Smart Lock.

14.3 Privacy

Set location service for apps and show password.

Manage auto start apps, check credentials storage, anti-theft setting, data protection. Keep current screen in view through Screen Pinning.

14.4 Encryption & credential

Trusted Credentials: Allows the application to access security credentials and other credential.

Storage and install from mobile phone: After clicked , you will Install storage encryption certificates from mobile. Clear credentials: Clear all the credential store content.

15. Accounts

Add account: You can add accounts, add the required account; Through the full synchronization, set all current account into sync. Conventional synchronous Settings to set the background data, automatic synchronization.

16. Back up & reset options

System->Back up & reset options
Through the factory default, remove all the data on the phone. Remove data including: account, system and application data and Settings, download should be: select the appropriate language, setting the keyboard and select the default input method. The application does not delete data including the current system software, SD Calvin parts, such as music or photos.

17. System->date&time

setting Automatic date & time, Automatic time zone,
Use 24-hour format.

18. Accessibility

Adjust miscellaneous function

19. Printing

Connected devices->connection preferences
Can be printed after installation service

20. About Phone

System->advanced

Can be checked Status, Legal information, Model
Number, android version, Energy version, Kernel
version, Build Number


21. USB connection

USB charging


There is default charging function when you connect
the device with your computer.

**How to copy your file or pictures from device to
your computer?**

Please connect the device with your computer by type-C cable then slip the touch screen from top to low -side then you will see the information as follow pictures.

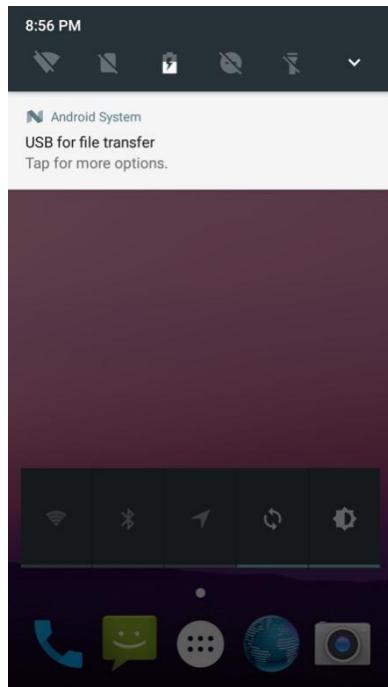

Please click the “USB for file transfer” you will get the following picture:

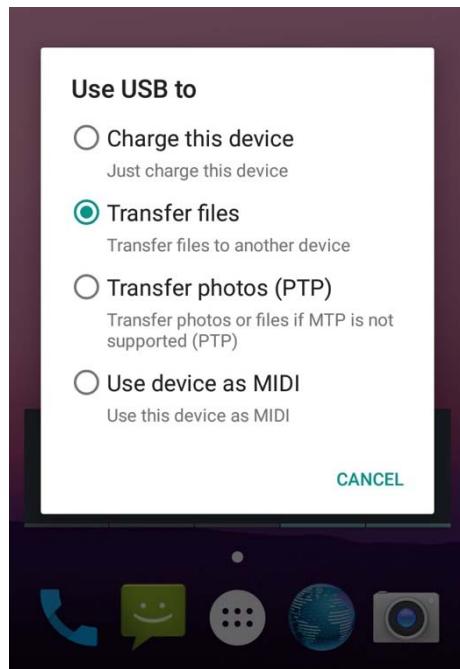

Choosing transfer files then you will find the file or pictures in your computer.

Maintenance and Layup

User's Manual for Battery

The rechargeable battery may serve as power source of the mobile phone. Please charge the battery when it becomes low in electricity. It is recommended to use up the battery capacity before charging for the sake of longer battery life.

Please do not attach the battery charger to any power supply if the charger is not in service. Never attach the charger to the battery for over one week as excessive charging will shorten the battery life. Temperature will challenge chargeable limit of the battery, so the battery may need to be cooled down or warmed up prior to charging. Charging will fail if the battery temperature is above 55oC or below -20oC.

Please only use the battery for its originally-designed purpose to avoid short circuit. Short circuit will occur

if the cathode and anode of the battery are connected via a conductor.

Never use the battery if it has become damaged. The battery life will become shortened if the battery is placed in any extremely-hot or extremely-cold environment. The mobile phone may not function properly if the battery is exposed to any extremely-hot or extremely-cold environment even if the battery is fully charged.

Do not put the battery in fire. Do not throw away any used batteries. Used batteries shall be sent to battery recycling services and disposed in accordance with local regulations.

Mobile Phone Layup

The following recommendations will be conducive to layup of your mobile phone:

Please place the mobile phone and all accessories at any place away from children.

Please keep the phone dry as liquid will corrode metallic circuit.

Please keep the phone away from high temperature as high temperature will shorten life of electronics, melt plastics and damage the battery.

Do not attempt to open the phone case or disassemble the phone. Non-professional disassembly will potentially damage the phone.
Do not use any detergent containing strong acid or base to clean the phone.
Always use original accessories, violation of which will void its warranty.

Safety Information

Always observe safety regulations for protecting users and environment when using the mobile phone.

Traffic Safety

Unless in emergency, please do not use the mobile phone while driving if no hands-free devices for safety and free movement are attached. Make sure that you are fully concentrated to driving. Please pull up your car to a safe place before you use the phone. Related regulations must be observed.

Some electronics may be affected by radio waves from transmitted by your mobile phone if no sufficient protection is made available.

It is recommended to use the mobile phone only in vehicles with external antenna.

Always have qualified technicians install the mobile phone onto your vehicle.

Flight Safety

Please switch off your mobile phone before boarding as mobile phones will challenge operation of aircraft and entire cellular network. It is illegal to use mobile phones on the plane and violation of these safety regulations will be accused or result in network denial-of-service.

Environmental Safety

Keep in mind to observe existing particular rules and policies at any places. Always remember to switch off your mobile phone where use of mobile phone is prohibited or may result in interference or danger.

Use of any wireless transmitting equipment, including cellular phone, might interfere with medical device not properly protected. Please ask doctor or medical device manufacturer for advice should you have any questions in this respect.

Your mobile phone might interfere with hearing aids, pacemaker and other medical electronics. Please follow suggestions from doctor or the manufacturer. Users are recommended to switch off their mobile phones at any places where explosion may occur,

e.g. gas station and chemical plants. Observe related restrictions on use of wireless devices.

System Update Security

The mobile phone is typically subject to authorized operating system update.

Any unauthorized operating system update might result in failure of updated operating system to comply with security requirements for mobile intelligent terminals, with system information security loophole.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

This Product meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health.

FCC RF Exposure Information and Statement the SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of this Device V700 (FCC ID: 2AWIL-35457711) has been tested against this SAR limit. SAR information on this can be viewed on-line at <http://www.fcc.gov/oet/ea/fccid/>. Please use the device FCC ID number for search. This device was

tested for typical operations 10mm from the body. To maintain compliance with FCC RF exposure requirements, 10mm separation distance should be maintained to the user's bodies

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radiofrequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However,
there is no guarantee that interference will not occur
in a particular installation.

If this equipment does cause harmful interference to
radio or television reception,
which can be determined by turning the equipment
off and on, the user is encouraged to try to correct
the interference by one or more of the followingmea-
sures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment a
nd receiver.
- Connect the equipment into an outlet on a circuit d
ifferent from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV tec
hnician for help.

FCC ID: 2AWIL-35457711