



Grde

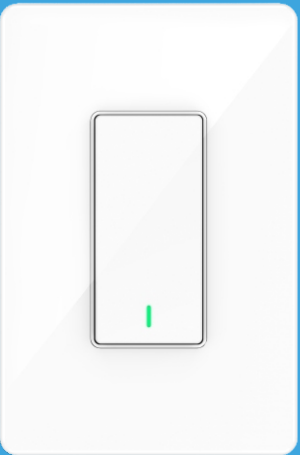

Smart Wi-Fi Light Switch
USER MANUAL

01 | Product Appearance

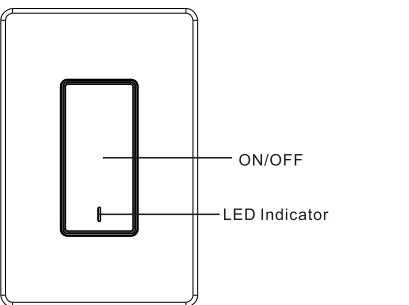

02 | Indicator Light Status

Light Color	Light Status	Switch Status
White	ON	Power ON
Green	ON	Power OFF
	Blink quickly(2 times every second)	Ready for configuration mode

03 | Specification

Brand Name	GRDE
Input Voltage	90-265V~, 50/60Hz
Max Output	16A
Rated Power	1800W/120V
Wireless Frequency	2.4GHz
Wireless Standard	IEEE802.11 b/g/n+Bluetooth
Work Temperature	-20—45℃

04 | Installation

Attention

- Make sure that the power at the circuit breaker is off before wiring.


- Neutral Wire is required. Confirm the wall box contains a Neutral Wire. If the wall box doesn't have a Neutral Wire, please call a professional electrician to install the switch or change another location in your home.
- Ensure the wire conductors are securely fastened to each wire.
- Ensure the Wi-Fi signal is strong before wiring.

Step1

Turn off the circuit breaker and use the electrical tester to test the power. Ensure the switch is off before wiring.

Step2

Use the electric tester to test power and make sure the power is off, and then pull the existing switch out, disconnect the wires from the existing switch with pliers. Follow the wiring diagram to connect the switch wires to the wires in the wall box with the following conductors.

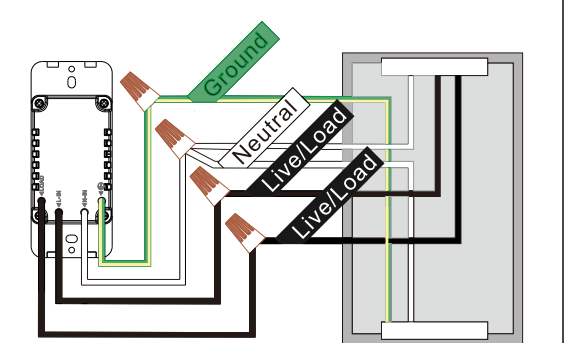

Step3

Mount the switch with the provided screws.

Step4

Turn on the power at the circuit breaker, you can switch the light on now.

05 | Install Smart Life App

- Search for Smart Life App on App store/Google Play store, or just scan the QR code below to download.



Available on the App Store



Get it on Google Play


- Register an account and memorize the password, enter your email address or your phone number, then obtain verification code to complete the registry.

06 | Add Devices

Default Configuration Connection-Green Indicator Light Blinks Quickly(2 times every second).


Note: This switch only supports 2.4G network, not supports 5G. If you don't see indicator light blinks quickly or indicator light blinks slowly(1 time every 2 seconds), long press on/off button for 5S until the indicator light blinks quickly.

- Confirm that the smart switch is well installed.
- Open Smart Life app, tap the icon "+" on the top right corner to add device, choose "Switch(BLE)".

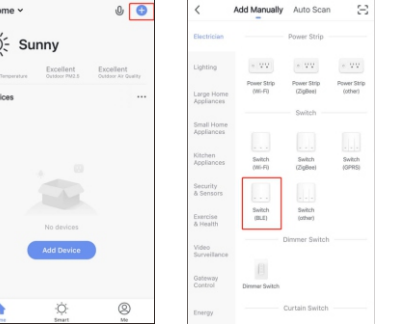


07 | How To Connect with Amazon Alexa

• Confirm indicator light blinks quickly, and then according to the instructions in the app to complete switch connected.

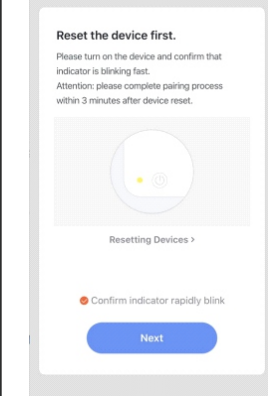


08 | How To Connect with Google Home

• Link Smart Life app with Google Home app, go to Google Home app and find "Works with Google".




09 | Trouble Shooting

Q: Why my smart switch connection failed?

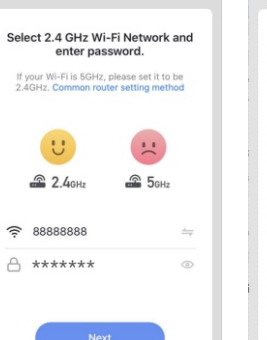


10 | Warranty

90 days money-back guarantee: If you are not satisfied with our switch, you can choose to refund it within 90 days.



11 | Customer Service

For users who need help about our product, please contact:
E-mail address: customerservice@grde.vip




12 | FCC Warning

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

13 | Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
• Reorient or relocate the receiving antenna.
• Increase the separation between the equipment and receiver.
• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
• Consult the dealer or an experienced radio/TV technician for help.



14 | Radiation Exposure Statement

To comply with FCC RF exposure compliance requirements, this grant is applicable to only mobile configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

15 | Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
• Reorient or relocate the receiving antenna.
• Increase the separation between the equipment and receiver.
• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
• Consult the dealer or an experienced radio/TV technician for help.

