


# Wireless Camera



## Quick User Guide



App may be differed from this user guide due to continuous updates

### 1. Accessories

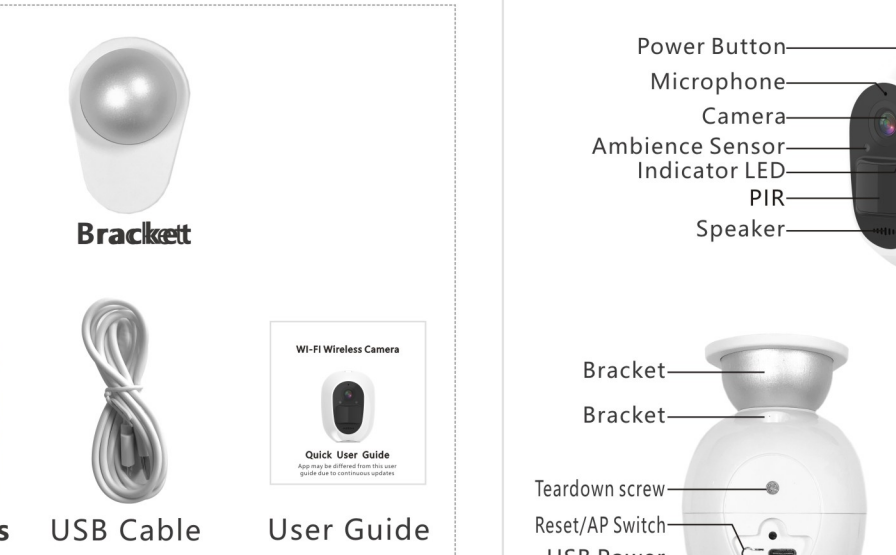

1x Camera, 1x Bracket, 1x Screw Sets, 1x Sticker, USB Cable, 1x User Guide.

### 2. Product Details

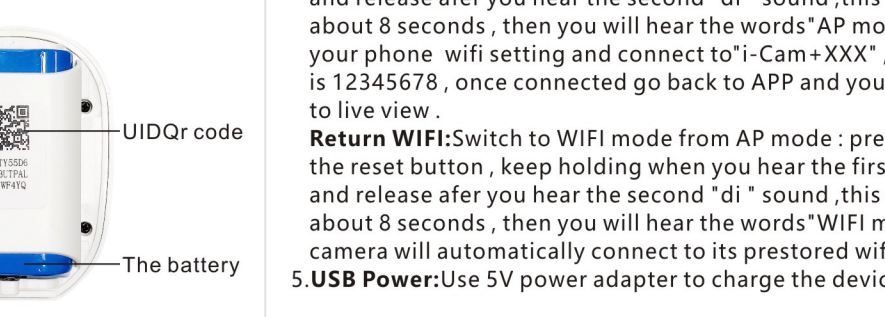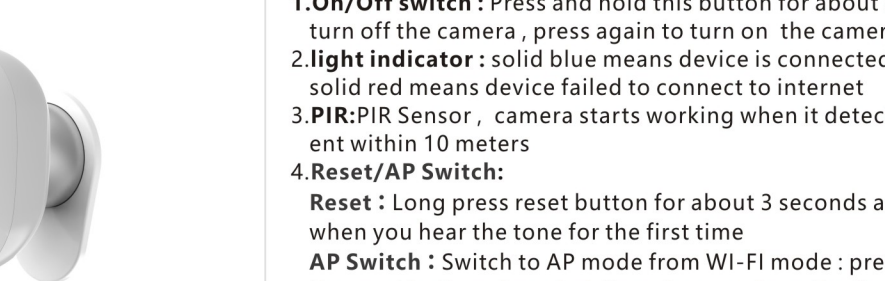

### Function introduction

- On/Off switch** : Press and hold this button for about 3 seconds to turn off the camera , press again to turn on the camera .
- light indicator** : solid blue means device is connected to internet, solid red means device failed to connect to internet
- PIR**:PIR Sensor , camera starts working when it detects movement within 10 meters
- Reset/AP Switch**:  
**Reset** : Long press reset button for about 3 seconds and release when you hear the tone for the first time  
**AP Switch** : Switch to AP mode from Wi-Fi mode : press and hold the reset button , keep holding when you hear the first "di" sound , and release after you hear the second "di" sound , this will take about 8 seconds , then you will hear the words "AP mode" . Go to your phone wifi setting and connect to "i-Cam+XXX" , password is 12345678 , once connected go back to APP and you will be able to live view .  
**Return WIFI**: Switch to WIFI mode from AP mode : press and hold the reset button , keep holding when you hear the first "di" sound , and release after you hear the second "di" sound , this will take about 8 seconds , then you will hear the words "WIFI mode" . The camera will automatically connect to its prestored wifi signal .
- USB Power**: Use 5V power adapter to charge the device

### 3. Tips before use

- Please charge the product with DC 5V, 1A/2A for minimum 3 hours before using**
- Power on the product with the power button. After the indicator LED is on, press Reset button for 3 seconds to reset**
- After reset, use downloaded app for setting up the camera**

### 4. APP INSTALLATION

- Scan the following QR codes or search for "i-Cam+" from the App Store (for iOS devices) or Google Play Store (for Android smartphones) to download and install the app.

### 5. APP REGISTRATION

- Open the app then input your E-mail address then press 'Register'. Check and select to agree the agreement then your E-mail box will get a verification mail. verification mail. (For better user's experience, please allow to open all permissions to avoid missing any notifications from the app.)

### 6. WI-FI CONNECTION

- Press 'Add Family' then set the room or position as per reminders.
- Enter your family name and then press 'Next'.
- Connect the device with power supply, and make sure your mobile phone is connected to an available Wi-Fi. Then press 'Setup device'.
- After the power on the device, wait for the device blue LED are blinking Which means your device in pairing mode

### 7. USING THE APP

- The device will enter to the device list automatically. Setup success! The device is ready to use.
- Notes about PIR detection**  
**\*User can change the PIR detection sensitivity in device settings. We recommend to set sensitivity at "Disabled" or "Low" to reduce false alarm and save the battery power in noisy environments.**  
**\*Disabled: disabled PIR detection.**  
**\*Low: delay 7 seconds PIR detects a moving.**  
**\*Medium: delay 5 seconds PIR detects a moving.**  
**\*High: delay 1 second PIR detects a moving.**
- Smart device basic settings could set "Storage management, Flip screen, Environmental model, PIR detection, Sleep time, Power frequency, LED indicator, Device name" Could check the information of "Device name, Device ID, Model, FW version, Manufacturer, Check for the FW updates."
- Turn on/off the speaker
- Screenshot
- Playback switch 'Micro SD memory' and 'Cloud storage'
- Take a video for the live view
- Microphone - Speak to the smart device side.
- Enter to select your family or smart device location
- Turn on/off the push notification.
- Settings: Sharing, Cloud storage, Delete the device..
- Press to add a smart device
- Account and value-added account management

### 8. SPECIAL NOTES!

- The device is equipped with a rechargeable lithium battery. The battery life will be affected by the device wake-up time and the number of wake-ups. Therefore, the PIR sensor alarm detection function is used in an environment with a lot of people. It is recommended to turn off or set the device to low sensitivity to reduce device wake-up and call times extend battery life. When the battery is low, please charge the battery immediately.
- Keep the device in range of your router. Make sure the device is placed close to the Wi-Fi router. If there has to be thick or insulated objects between the device and the Wi-Fi router, which may lead to weak Wi-Fi signal, please make sure the Wi-Fi signal is in good level before you start using the device.
- It is a delicate device with low power consumption design. Everytime the device is awakened and will work for few seconds. After that, the device will enter standby mode to save power. You can set the work time in the app settings.
- Because the mainland China does not receive Google's system push messages, you need to open the app's self-starting function in your phone to receive push messages.
- This device provides one month of free cloud storage and face recognition services. If you need to continue using value-added services after the trial period expires, you need to purchase them in the app.

### 9. FCC INSTRUCTIONS

- This product has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This product generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If the product does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
  - Increase the separation between the product and receiver.
  - Connect the product into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio/TV technician for help.
- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
- this device may not cause harmful interference, and
  - this device must accept any interference received, including interference that may cause undesired operation.
- Warning:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the product.
- FCC Radiation Exposure Statement:  
The equipment complies with FCC Radiation exposure limits set forth for uncontrolled environment.  
This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.