


WIRELESS CHARGER BLUETOOTH SPEAKER

User manual



Product introduction

Ambience night light

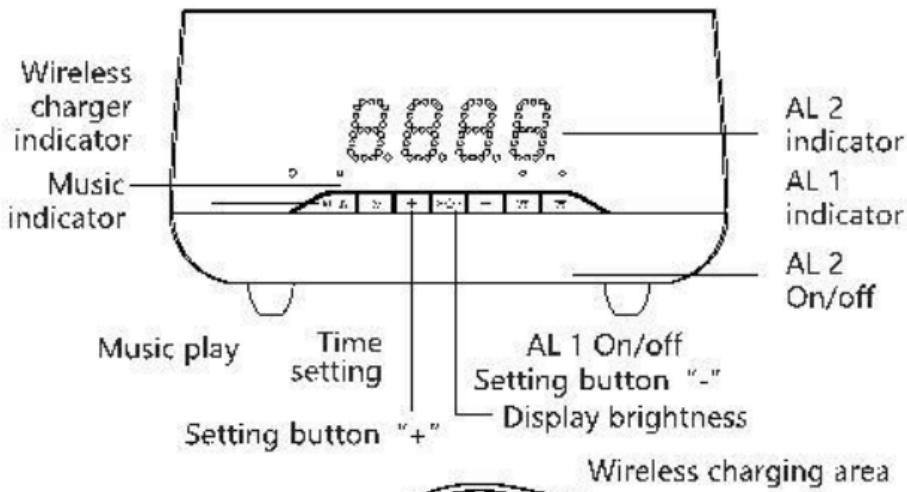

① LED indicator of PM
when 12 hour mode


💡 Zz : Touch sensor
for light/snooze

Function

1. The wireless charger suits all kind of smartphone that conforms to QI standards.
2. After BT connecting, the clock will automatically sync the time from your phone.
3. Supports time display, dual alarm clocks, and snooze function.
4. Music player/Bluetooth speaker.
5. Gradient ambience night light, or fixed a certain color.
6. Alarm clock setting will be memorized even if the power is off.


Light setting

1. Press “ zz” light/snooze button to turn on ambiance light;
2. Press again to select current color of light;
3. Press the button third time to turn off the light.



Display brightness setting

1. “High-grade” is the default brightness of time display when product first time power-on.
2. Press the display brightness setting button “*①*” to switch from “Middle-grade”, “Low-grade” brightness to “Off”.



Setting restore

Press the display brightness setting button and “+” at the same time more than 2 seconds and all settings will be restored as default after all indicator lights on.

Time/alarm clock setting

1. Long press the time setting button “” and start to set the time, the indicator of time setting will light up, press button “+” or “-” to select 12/24 hour clock.
2. Second press time setting button “” to adjust hour, while the hour part is blinking, then short press/long press the button “+” or “-” to slow or quickly adjust the number.
3. Third press time setting button “” again to adjust minute while the minute part is blinking, then short press /long press the button “+” or “-” to slow or quickly adjust the number.
4. Fourth press time setting button “” and get into the alarm clock 1 “” setting while corresponding icon is blinking, fourth & fifth press to adjust the alarm time hour and minutes by the same steps as time setting above.
5. Sixth press time setting button “” to set the alarm clock 2 “”, sixth & seventh press by same steps as alarm clock 1 setting.
6. Finally press time setting button to get all settings done.
7. Notice: product will automatically quit setting mode with no operation in 10 seconds.

Alarm clock volume setting

When the alarm clock is ringing, press "+" or "-" button to turn up/down the alarm volume.

Alarm clock on/off

1. Press alarm clock "⌚" / "⌚" on/off button to turn on alarm clock "⌚" / "⌚", meanwhile the alarm time will be displayed with corresponding icon lighting up. Press the same button again will turn off the alarm with icon lighting off;
2. The clock will alarm for 60 seconds with ambience light on, press any button on the front side to stop the alarm.

Snooze mode

When the alarm is ringing, press the "🌙 zz" light/snooze touch button to pause the alarm and colorful lights. Corresponding alarm indicator light flashes (the alarm enters the snooze and will sound again in 5 minutes, will cycle up to 5 times, and need to touch light/snooze touch button again when alarm rings).

Wireless charger

1. Put wireless charging products that support QI protocol into "⚡" specified charging area. If charging normally, blue indicator light will light up; if blue light blinking, please check if there is any metal in the charging area, or please re-place the charging device in the charging area.
2. This product can support up to 15W wireless charging output.

Music/time sync setting

1. The bluetooth is off as default, long press music play button “” to activate BT (with indicated tone and BT icon blink) or turn off BT.
2. BT indicator will keep on light-up warm white while successfully connection (within 10 meters connection distance), otherwise the indicator will keep on blinking.
3. Check your phone bluetooth and search for “Speaker with charger” to connect and you will receive SMS permission application, allow/refuse. Select allow and the time will be automatically synced with your Android /iOS phone.
4. Press music play button “” to pause/play.
5. Press “+” / “-” to play previous/next song.
6. Long press “+” / “-” to adjust music volume (with screen displaying “U00” ~ “U16”).
7. BT connection indicator will blink every 5 seconds if the bluetooth turned off on your phone or overstep connection distance (10m), please reconnect.

Specification

Dimensions	185x115x102mm
Net weight	530g
Power	DC12V 1.5A
Rated power	18W
Wireless charging	15W

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radioTV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body Use only the supplied antenna.