

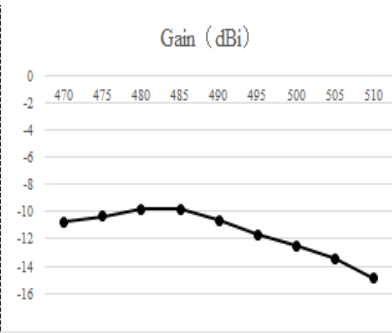
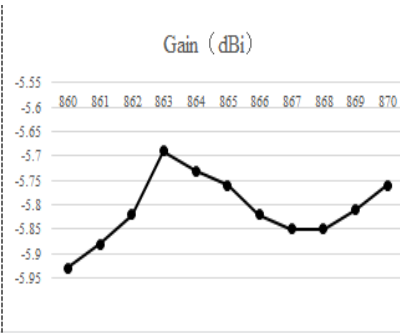
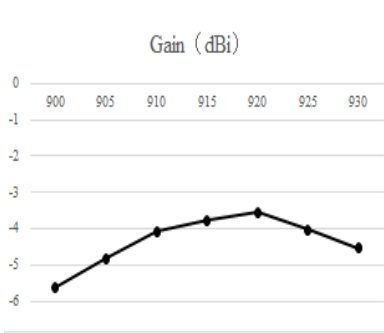
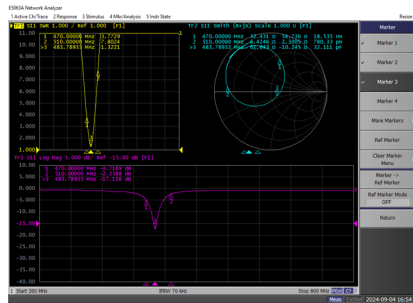
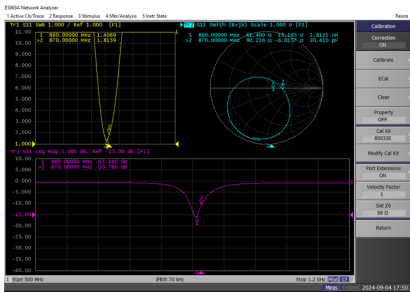





ManufacturerXiamen Milesight IoT Co., Ltd.
Add: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China

	LoRa	
B915	B868	B470


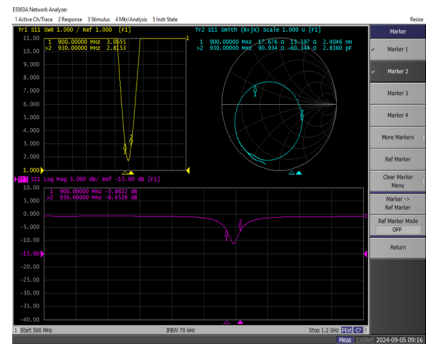


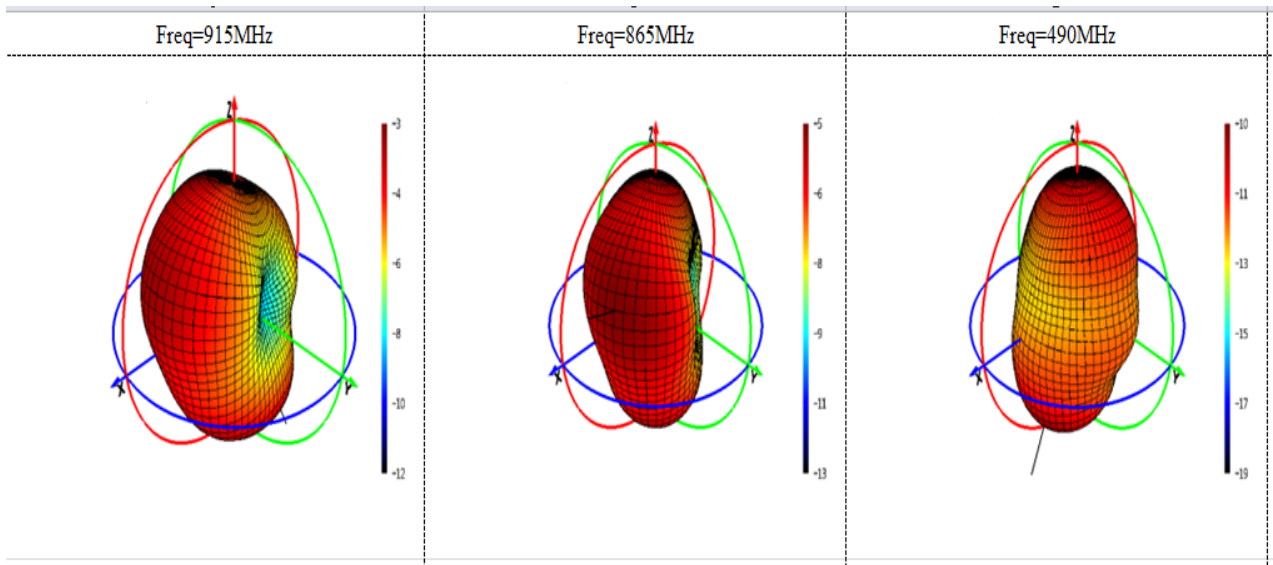

2.4GHz BT [Pulse ANT3216A063R2455A]	NFC
---	------------

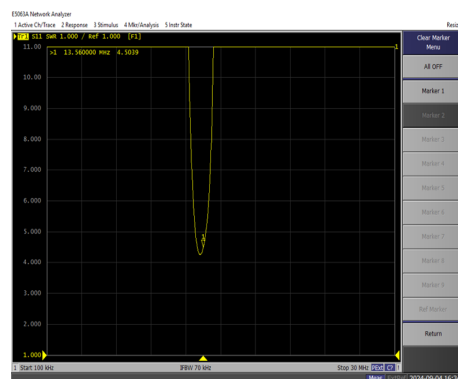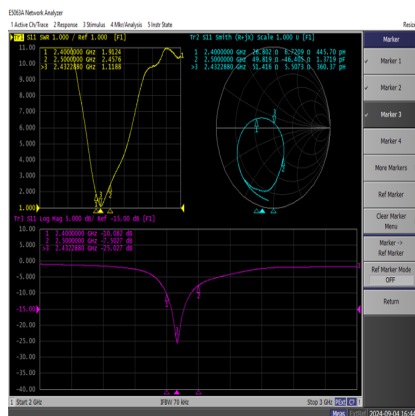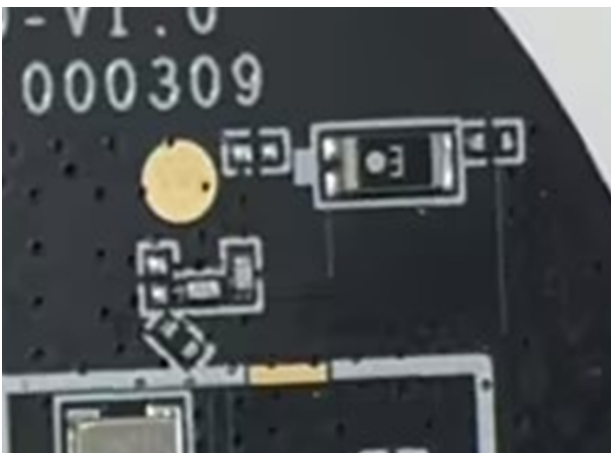

Freq=2450MHz

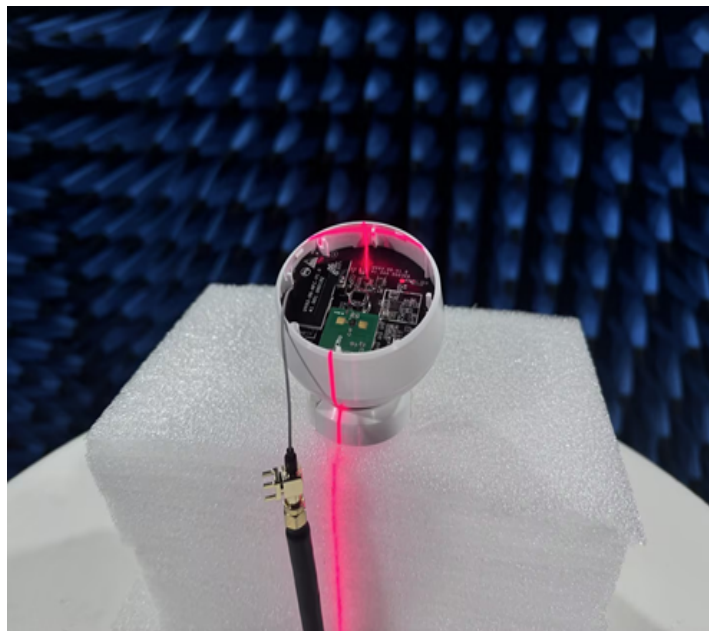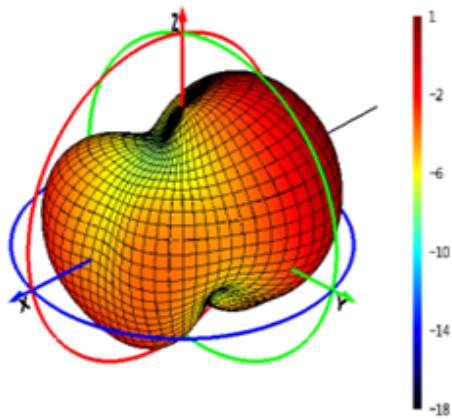

B915	Frequency ID	1	2	3	4	5	6	7
	Frequency	900	905	910	915	920	925	930
	Gain (dBi)	-5.6	-4.81	-4.08	-3.78	-3.54	-4.04	-4.54
	Efficiency (dB)	-5.9	-5.1	-4.5	-4.37	-4.5	-4.73	-5.2
	Efficiency (%)	25.68	30.9	35.52	36.57	35.47	33.65	30.21

B868	Frequency ID	1	2	3	4	5	6	7	8	9	10	11
	Frequency	860	861	862	863	864	865	866	867	868	869	870
	Gain (dBi)	-5.93	-5.88	-5.82	-5.69	-5.73	-5.76	-5.82	-5.85	-5.85	-5.81	-5.76
	Efficiency (dB)	-5.8	-5.78	-5.75	-5.72	-5.76	-5.84	-5.93	-6	-6.04	-6.03	-6.03
	Efficiency (%)	26.32	26.42	26.6	26.79	26.55	26.06	25.51	25.1	24.92	24.93	24.94

B470	Frequency ID	1	2	3	4	5	6	7	8	9
	Frequency	470	475	480	485	490	495	500	505	510
	Gain (dBi)	-10.72	-10.35	-9.85	-9.84	-10.6	-11.67	-12.5	-13.45	-14.87
	Efficiency (dB)	-13.79	-13.35	-12.66	-12.41	-12.92	-14.07	-14.84	-15.77	-17.42
	Efficiency (%)	4.18	4.62	5.42	5.74	5.1	3.92	3.28	2.65	1.81

BT	Frequency ID	1	2	3	4	5	6	7	8	9	10	11
	Frequency	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
	Gain (dBi)	-0.06	0.35	0.49	0.5	0.48	0.35	0.12	-0.24	-0.17	-0.19	-0.42
	Efficiency (dB)	-3.99	-3.72	-3.65	-3.5	-3.37	-3.41	-3.7	-4.05	-4.17	-4.46	-4.88
	Efficiency (%)	39.87	42.43	43.1	44.68	45.98	45.62	42.62	39.35	38.25	35.85	32.51