


PSA


佳邦科技股份有限公司

INPAQ TECHNOLOGY CO., LTD.

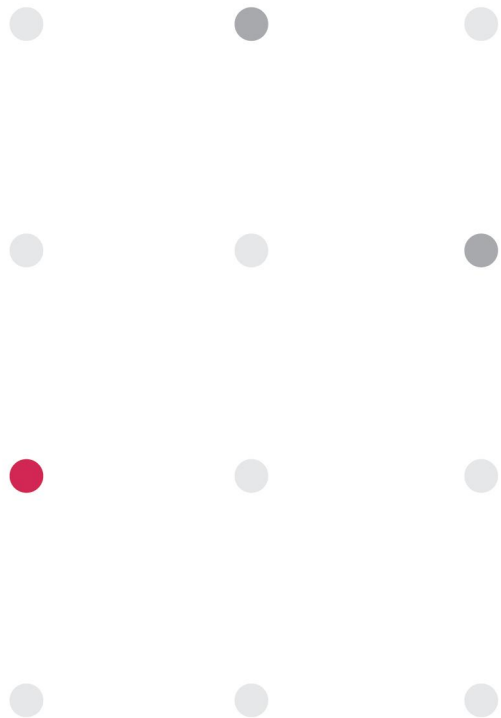

PSA

PASSIVE SYSTEM ALLIANCE
INPAQ TECHNOLOGY CO., LTD.

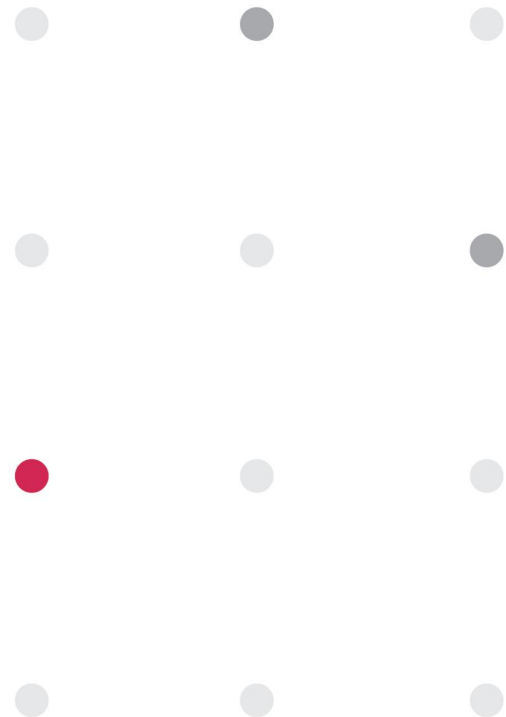

致瓴科技-H2E基站

Presented by

冯立翔

2024/ 12/ 02



Version	Date	Description	Author
V01	2024/12/02	New Release	冯立翔

OUTLINE

1. Measurement Information

1.1 Experimental Setup

1.2 Antenna Solution Detail

2. Antenna Characteristics

2.1 S-Parameter


2.2 Antenna Efficiency and Peak Gain

2.3 3 views of antenna & 2D Radiation Patterns

3. Summary

1. Measurement Information


1.1 Experimental Setup

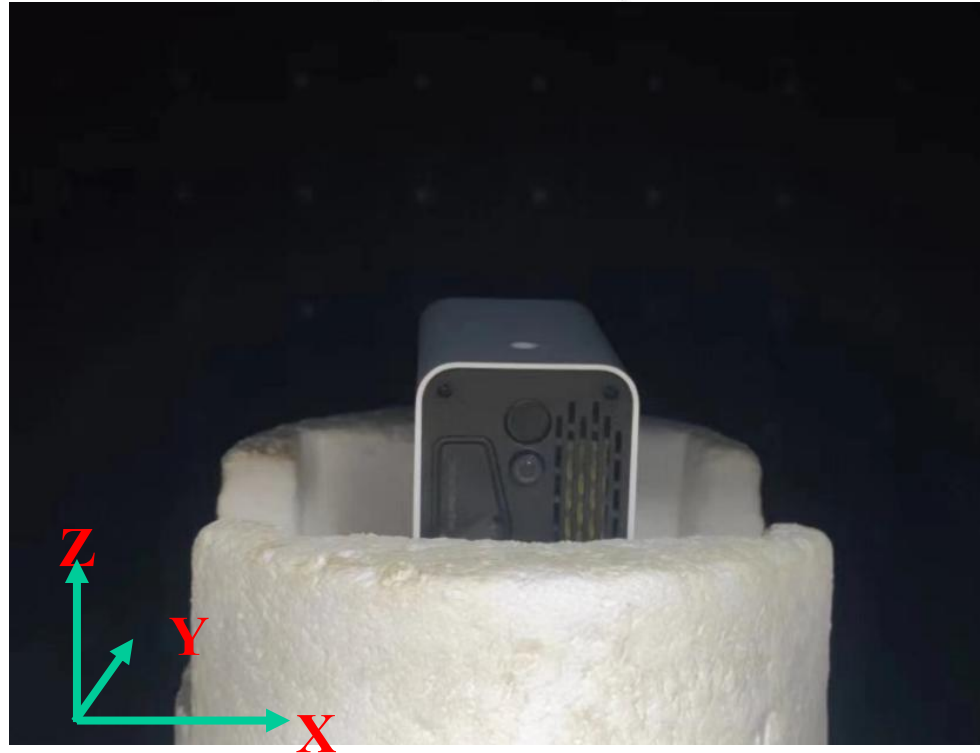

1. Measurement Information

1.2 Antenna Solution Detail

WiFi1

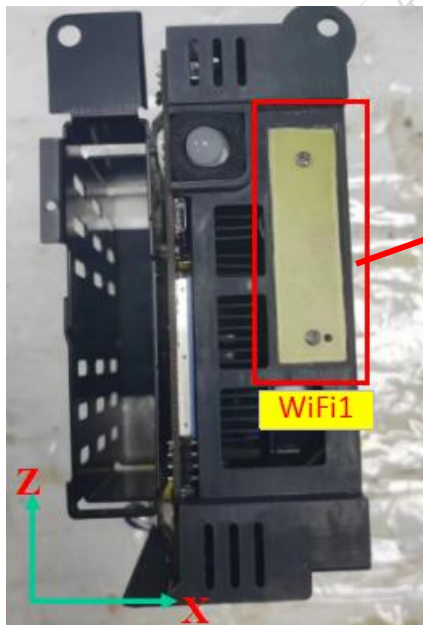

天线尺寸: 14.8mm*52.6mm


1.13黑色正常线, 一代端子头,
线长:115mm

天线频段:
2400-2500MHz

1. Measurement Information

1.2 Antenna Solution Detail

WiFi2

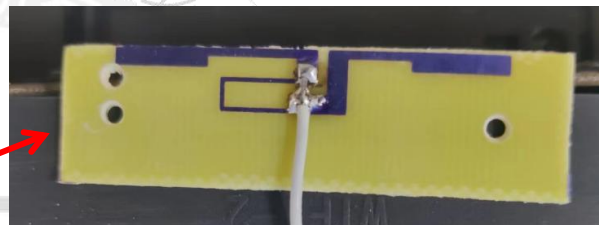


天线尺寸: 14.8mm*52.6mm
1.13黑色正常线, 一代端子头,
线长:45mm
天线频段:
2400-2500MHz

1. Measurement Information

1.2 Antenna Solution Detail

BT

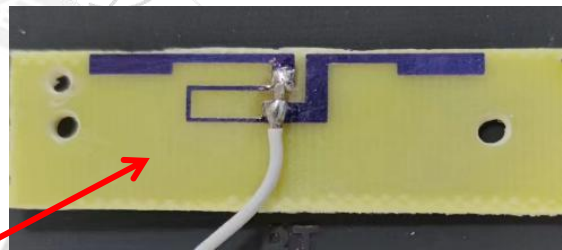


天线尺寸: 14.8mm*52.6mm
1.13黑色正常线, 一代端子头,
线长:170mm
天线频段:
2400-2500MHz

1. Measurement Information

1.2 Antenna Solution Detail

433MHz

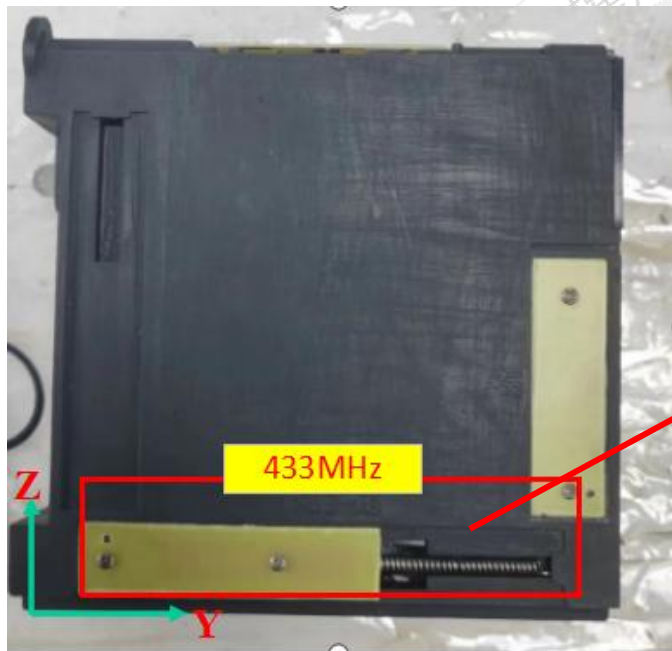


天线尺寸: 14.8mm*94.5mm
1.13黑色正常线, 一代端子头,
线长:170mm
天线频段:
2400-2500MHz

2. Antenna Characteristics

2.1 S-Parameter


WiFi1

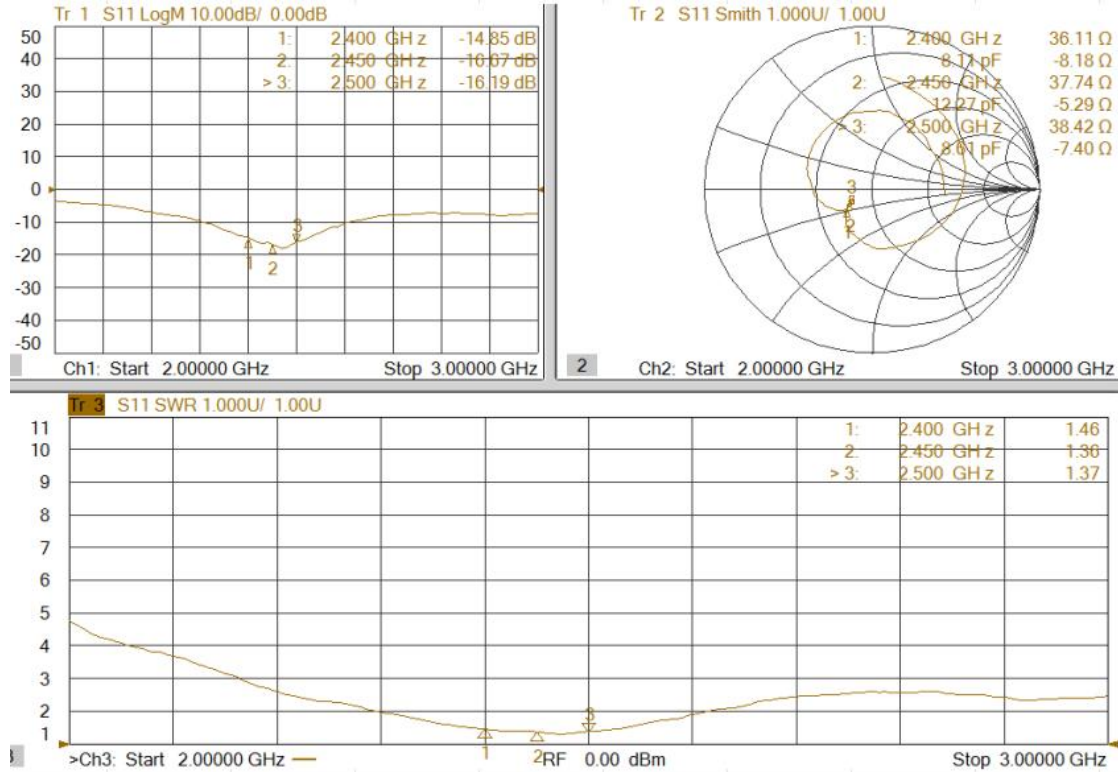

2. Antenna Characteristics

2.1 S-Parameter


WiFi2

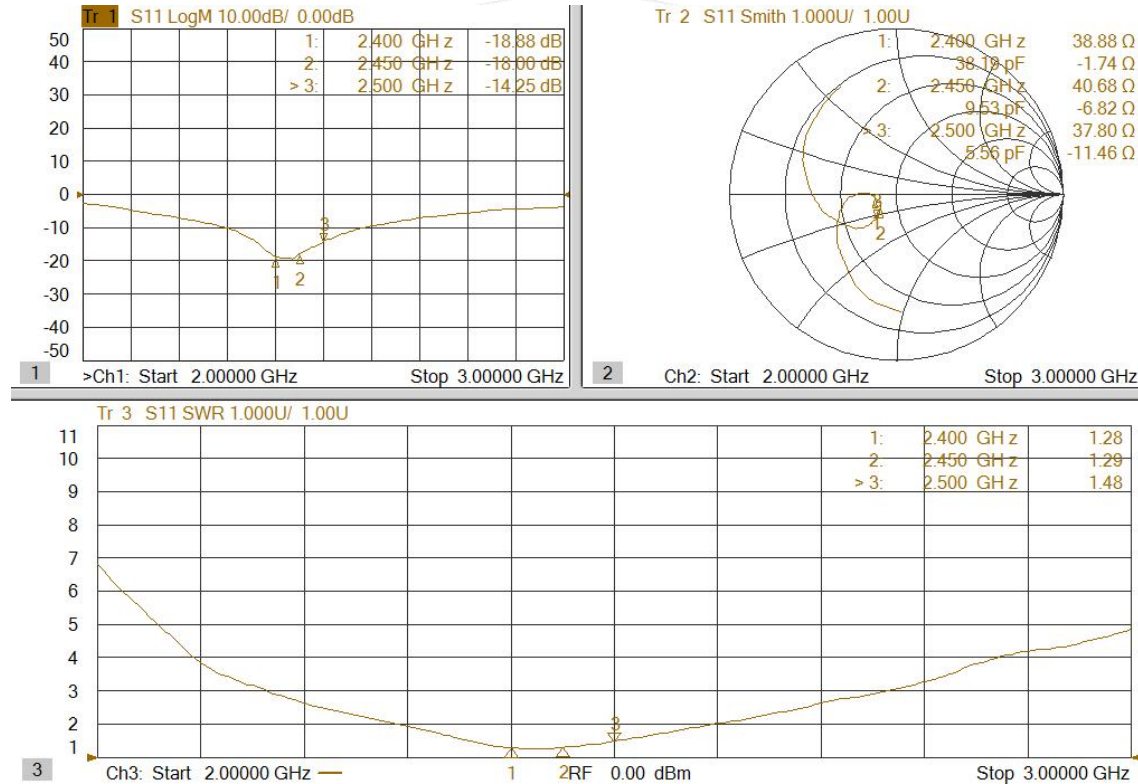

2. Antenna Characteristics

2.1 S-Parameter


BT

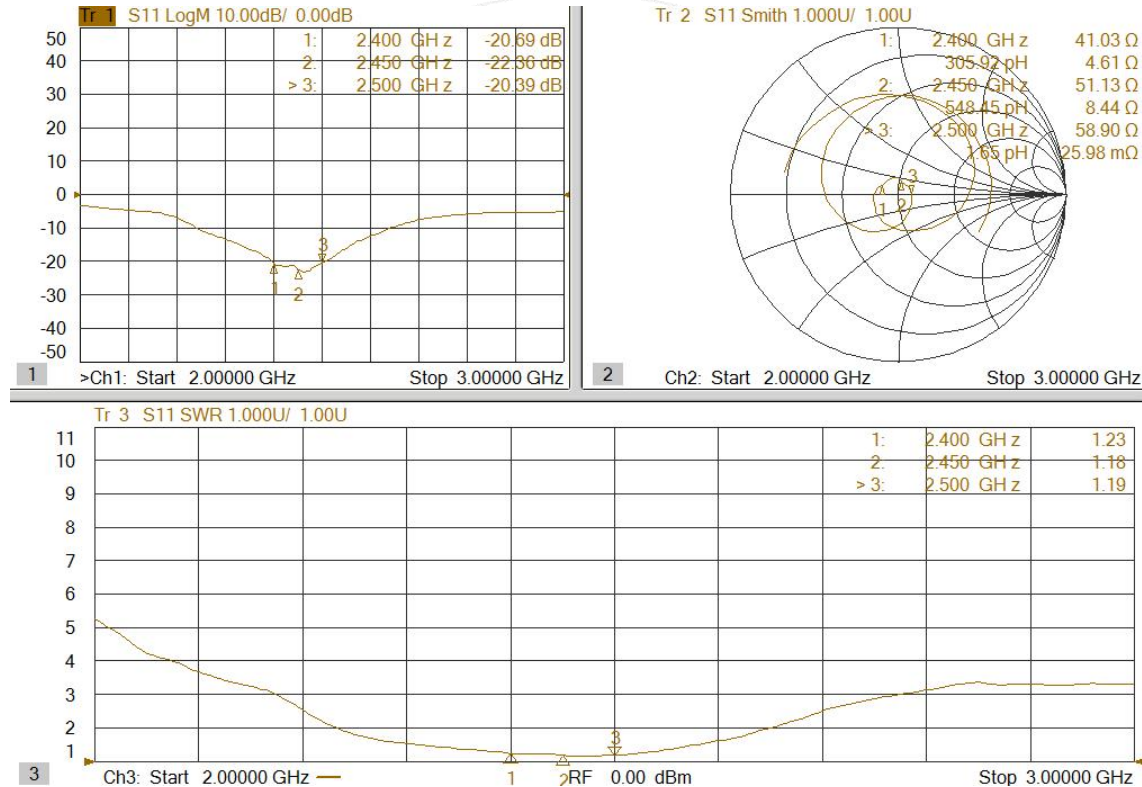

2. Antenna Characteristics

2.1 S-Parameter


433MHz

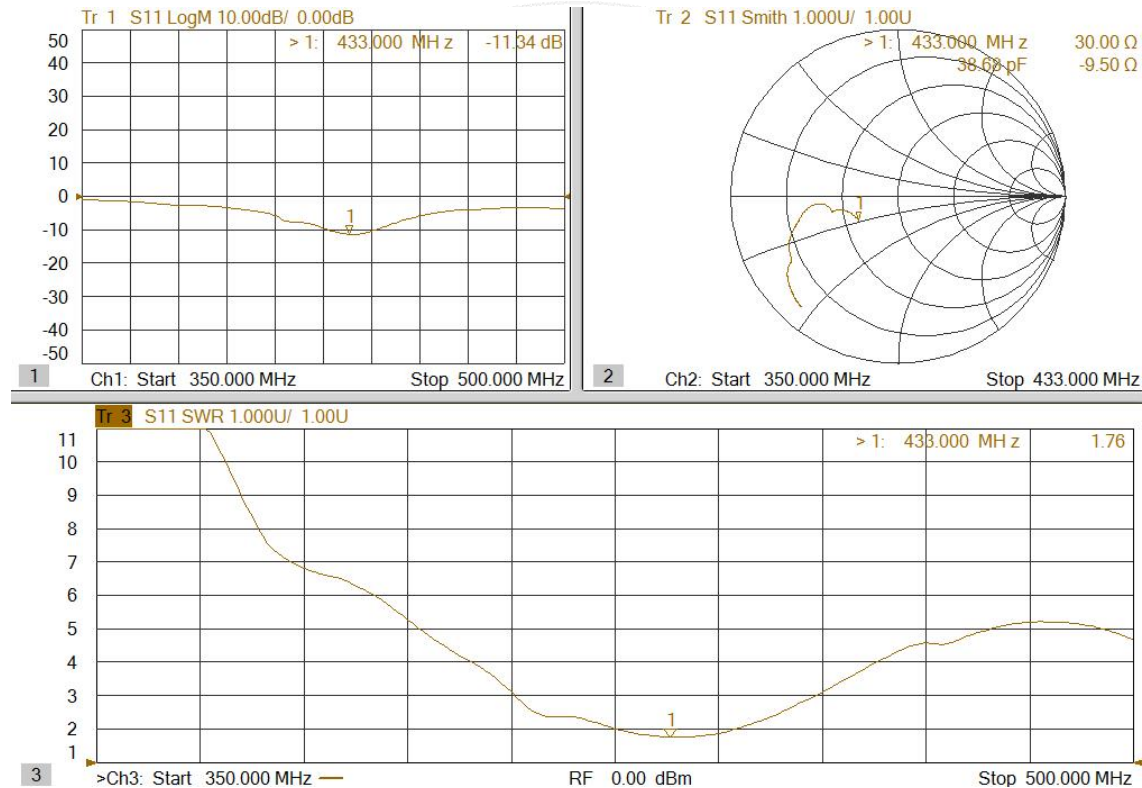


2. Antenna Characteristics

2.2 Antenna Efficiency and Peak Gain

WiFi1

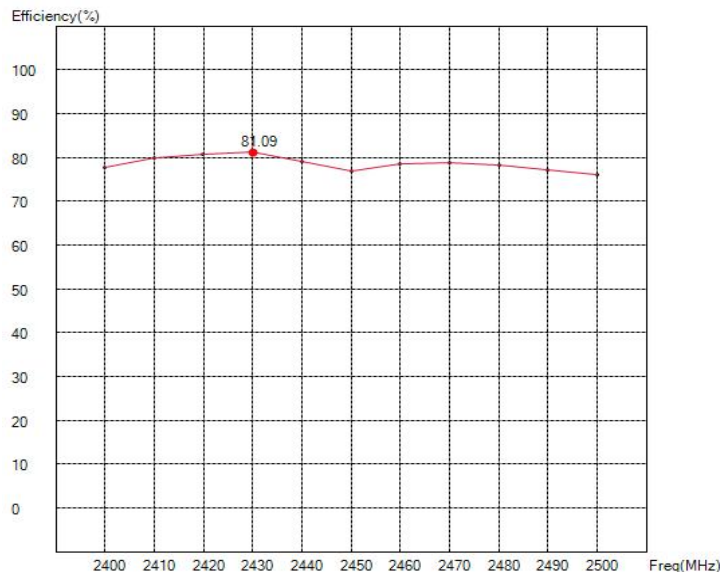

Maximum Efficiency at 2430MHz : 81.09%

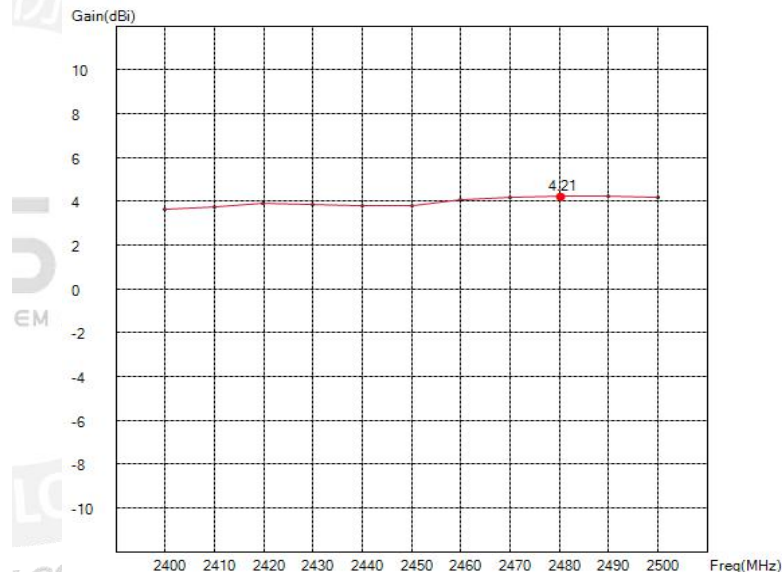


Maximum Peak Gain at 2480MHz :4.21dBi


2. Antenna Characteristics

2.2 Antenna Efficiency and Peak Gain

WiFi2

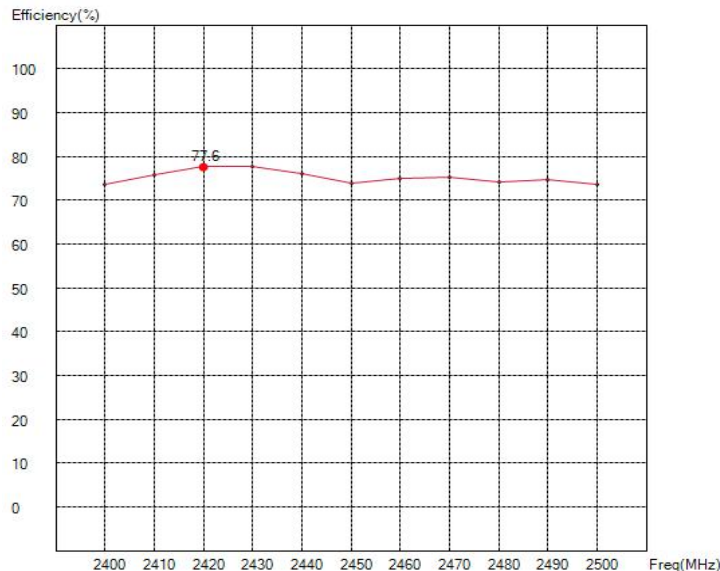

Maximum Efficiency at 2420MHz :77.6%

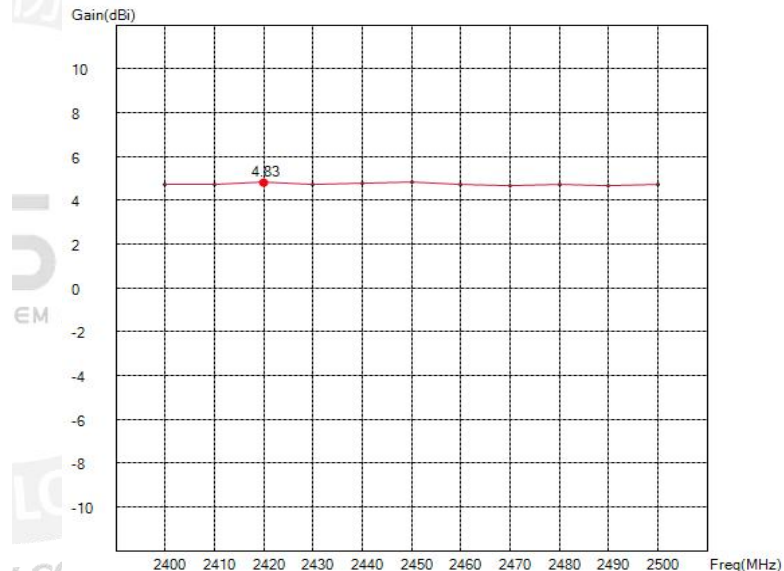


Maximum Peak Gain at 2420MHz :4.83dBi


2. Antenna Characteristics

2.2 Antenna Efficiency and Peak Gain

BT

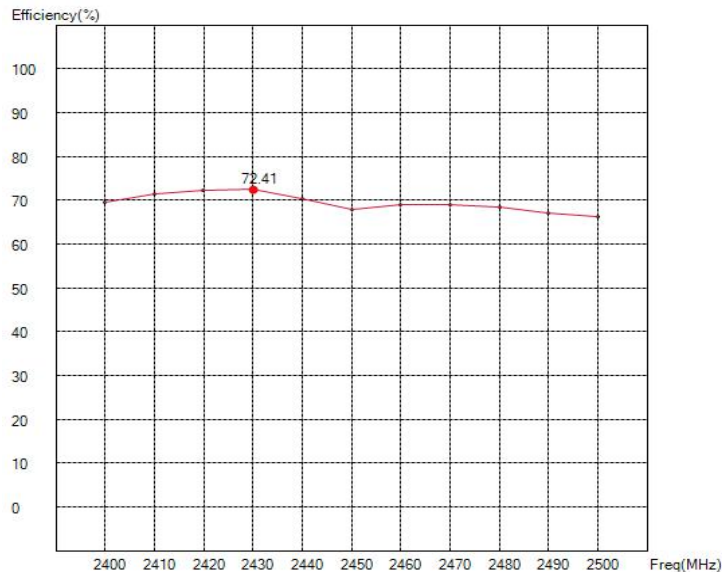

Maximum Efficiency at 2430MHz : 72.41%

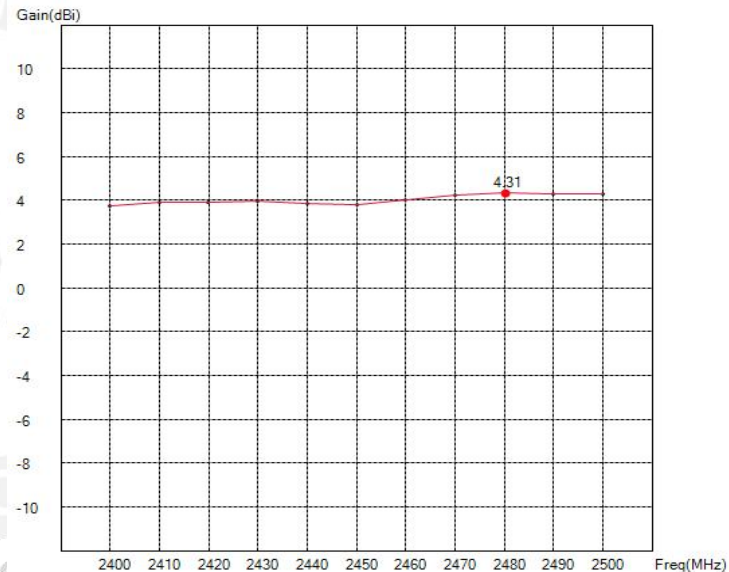


Maximum Peak Gain at 2480MHz :4.31dBi


2. Antenna Characteristics

2.2 Antenna Efficiency and Peak Gain

433MHz

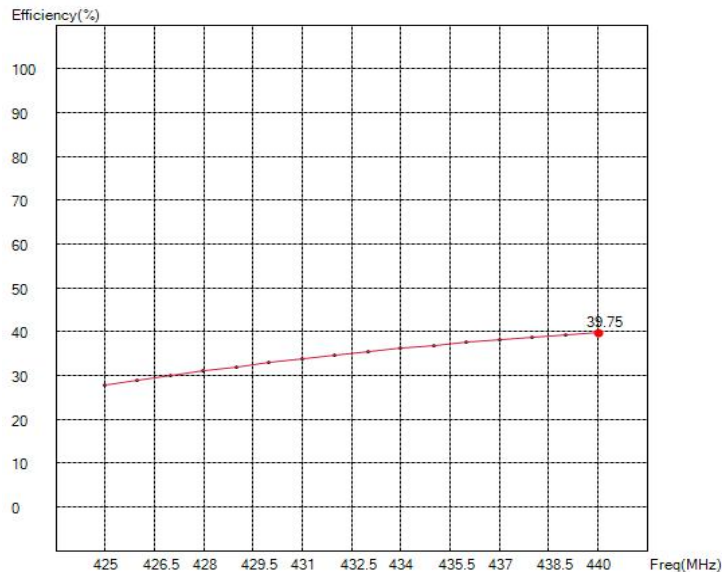

Maximum Efficiency at 440MHz : 39.75%

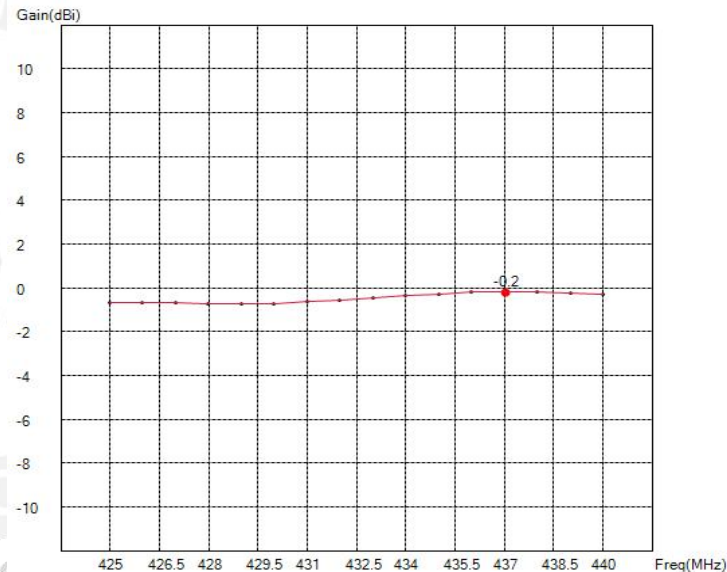

Maximum Peak Gain at 437MHz : -0.2dBi


2. Antenna Characteristics

2.2 Antenna Efficiency and Peak Gain


	WiFi1		WiFi2		BT		433MHz	
Frequency (MHz)	Efficiency (%)	Peak gain (dBi)	Efficiency (%)	Peak gain (dBi)	Efficiency (%)	Peak gain (dBi)	Efficiency (%)	Peak gain (dBi)
2400	77.58	3.62	73.60	4.73	69.42	3.73	/	/
2450	76.96	3.78	73.92	4.82	67.93	3.78	/	/
2500	75.95	4.16	73.49	4.71	66.26	4.27	/	/
425	/	/	/	/	/	/	27.77	-0.67
433	/	/	/	/	/	/	35.49	-0.45
440	/	/	/	/	/	/	39.75	-0.32

2. Antenna Characteristics


2.3 3 views of antenna




X-Z plane

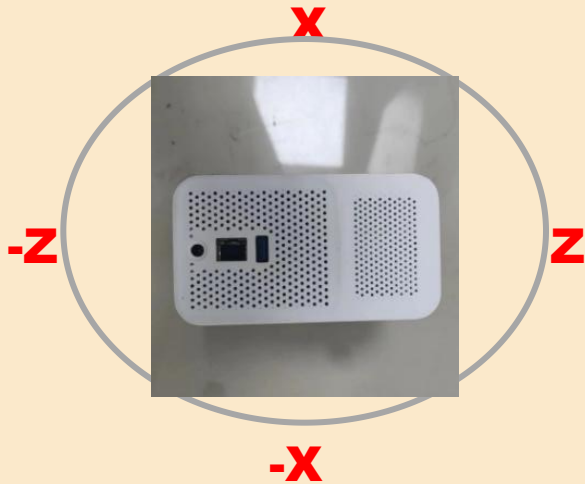

Y-Z plane



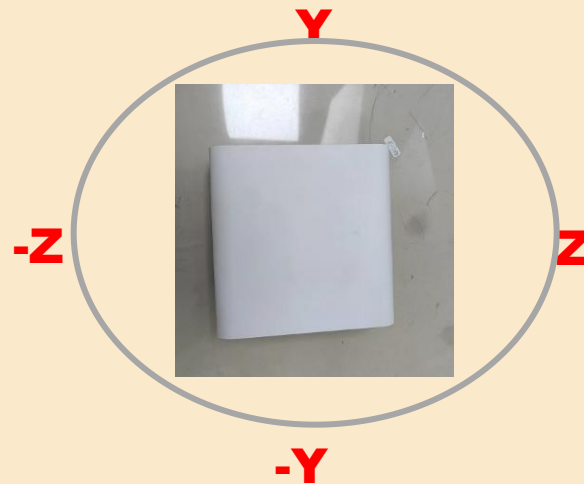


X-Y plane

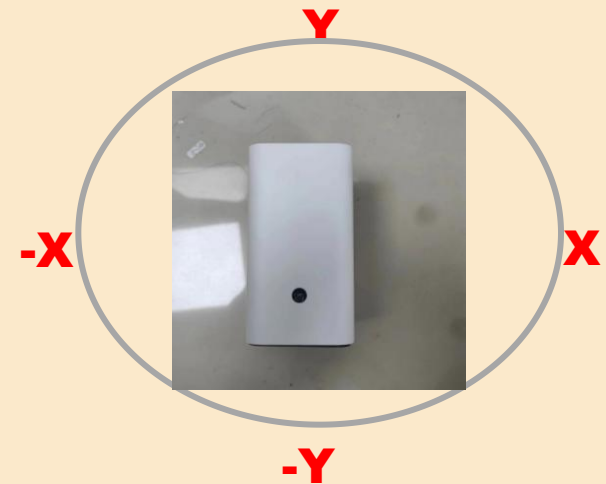

2. Antenna Characteristics

2.3 2D Radiation Patterns

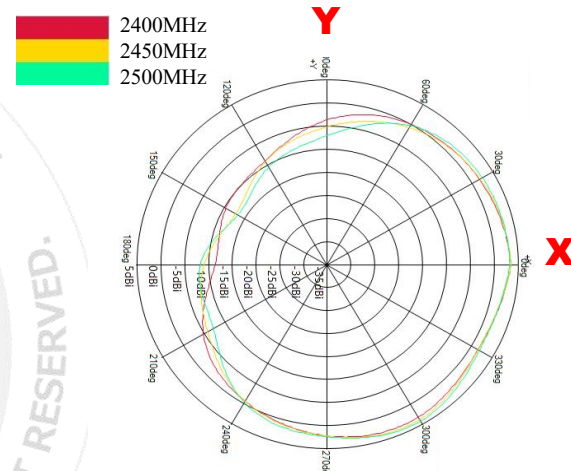
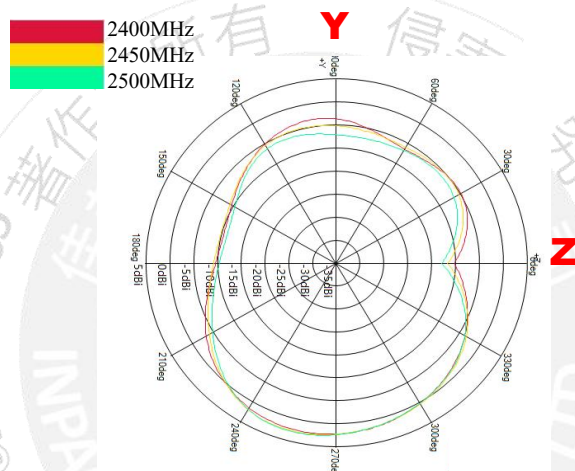
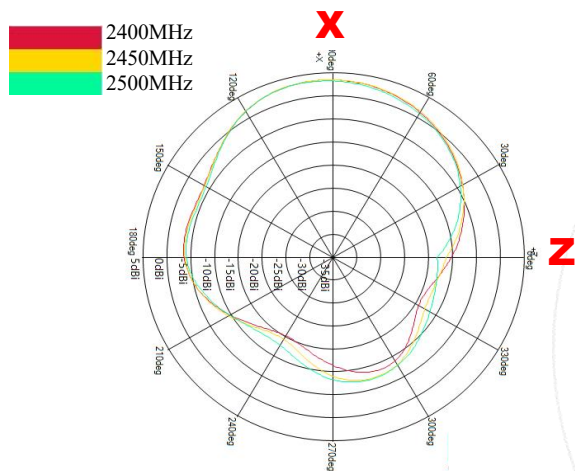


	ZX plane		ZY plane		XY plane	
Frequency [MHz]	Max Value [dBi]	Average [dBi]	Max Value [dBi]	Average [dBi]	Max Value [dBi]	Average [dBi]
2400	3.62	-2.53	2.07	-2.36	3.62	-0.01
2450	3.63	-2.40	2.12	-2.41	3.78	0.00
2500	3.37	-2.67	2.25	-2.70	4.16	0.15

2. Antenna Characteristics

WiFi2




2.3 2D Radiation Patterns

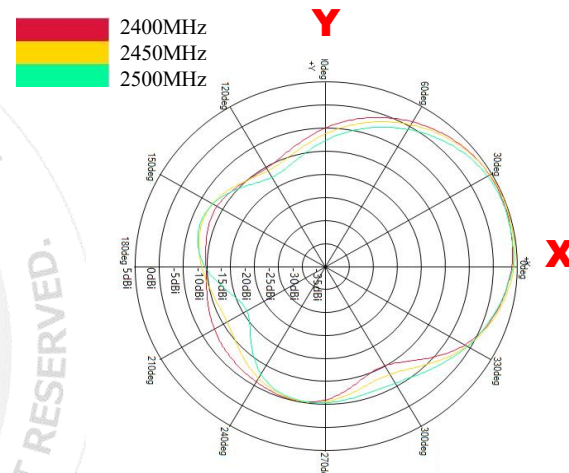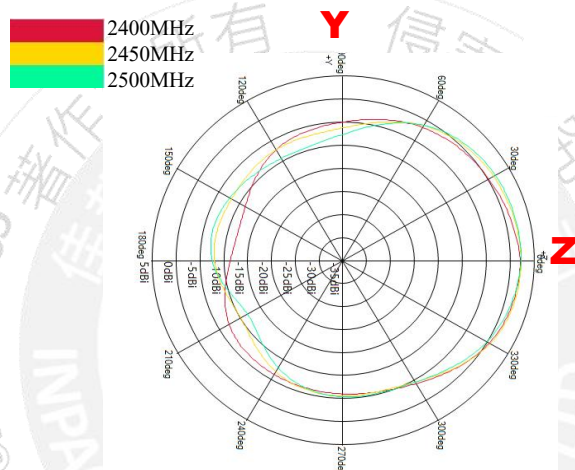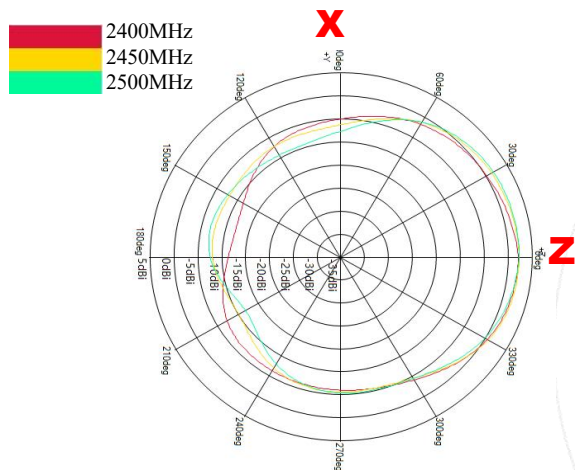

	ZX plane		ZY plane		XY plane	
Frequency [MHz]	Max Value [dBi]	Average [dBi]	Max Value [dBi]	Average [dBi]	Max Value [dBi]	Average [dBi]
2400	4.03	1.14	2.26	-1.47	4.73	-1.25
2450	4.52	1.62	2.41	-1.27	4.82	-1.16
2500	4.34	1.52	2.42	-1.38	4.24	-1.62

2. Antenna Characteristics

2.3 2D Radiation Patterns

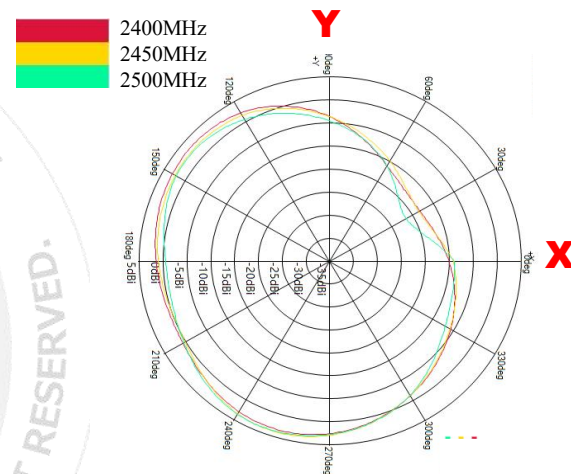
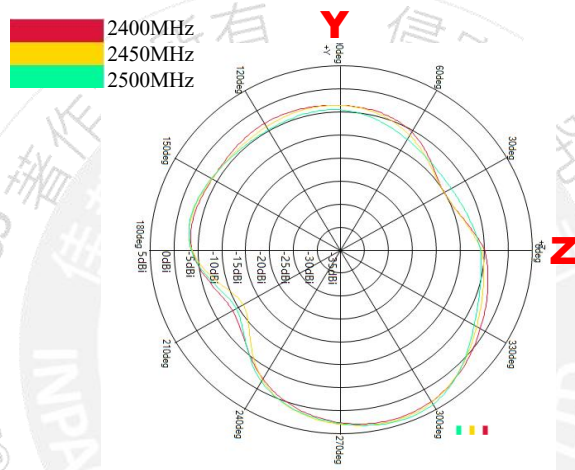
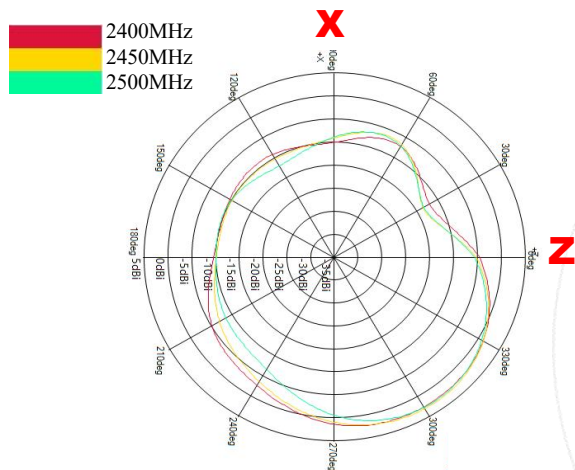


	ZX plane		ZY plane		XY plane	
Frequency [MHz]	Max Value [dBi]	Average [dBi]	Max Value [dBi]	Average [dBi]	Max Value [dBi]	Average [dBi]
2400	2.58	-2.30	2.96	-1.85	2.99	-0.20
2450	3.05	-2.45	3.17	-1.95	3.26	-0.35
2500	2.68	-3.21	3.67	-1.96	3.36	-0.71

2. Antenna Characteristics

2.3 2D Radiation Patterns

433MHz

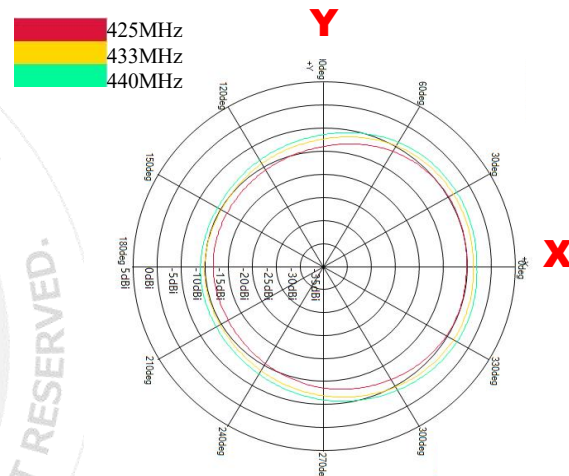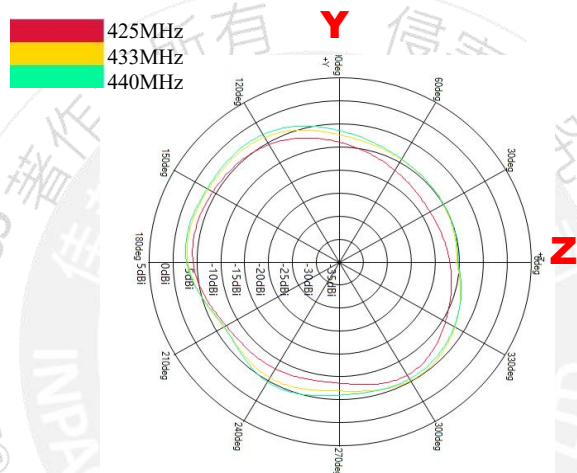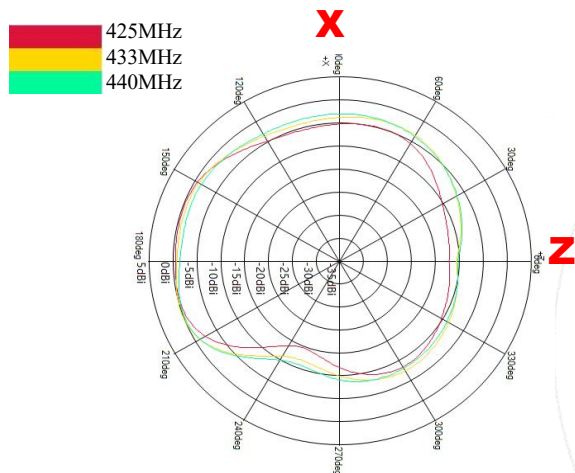


	ZX plane		ZY plane		XY plane	
Frequency [MHz]	Max Value [dBi]	Average [dBi]	Max Value [dBi]	Average [dBi]	Max Value [dBi]	Average [dBi]
425	-0.67	-7.29	-4.39	-8.80	-4.68	-7.70
433	-0.94	-5.70	-3.27	-7.05	-3.48	-6.15
440	-1.24	-5.49	-2.91	-6.65	-2.64	-5.31

3. Summary

- The performance of antennas is shown in table

	WiFi1	WiFi2	BT	433MHz
Maximum Efficiency (%)	81.09	77.6	72.41	39.75
Maximum Gain (dBi)	4.21	4.83	4.31	-0.2

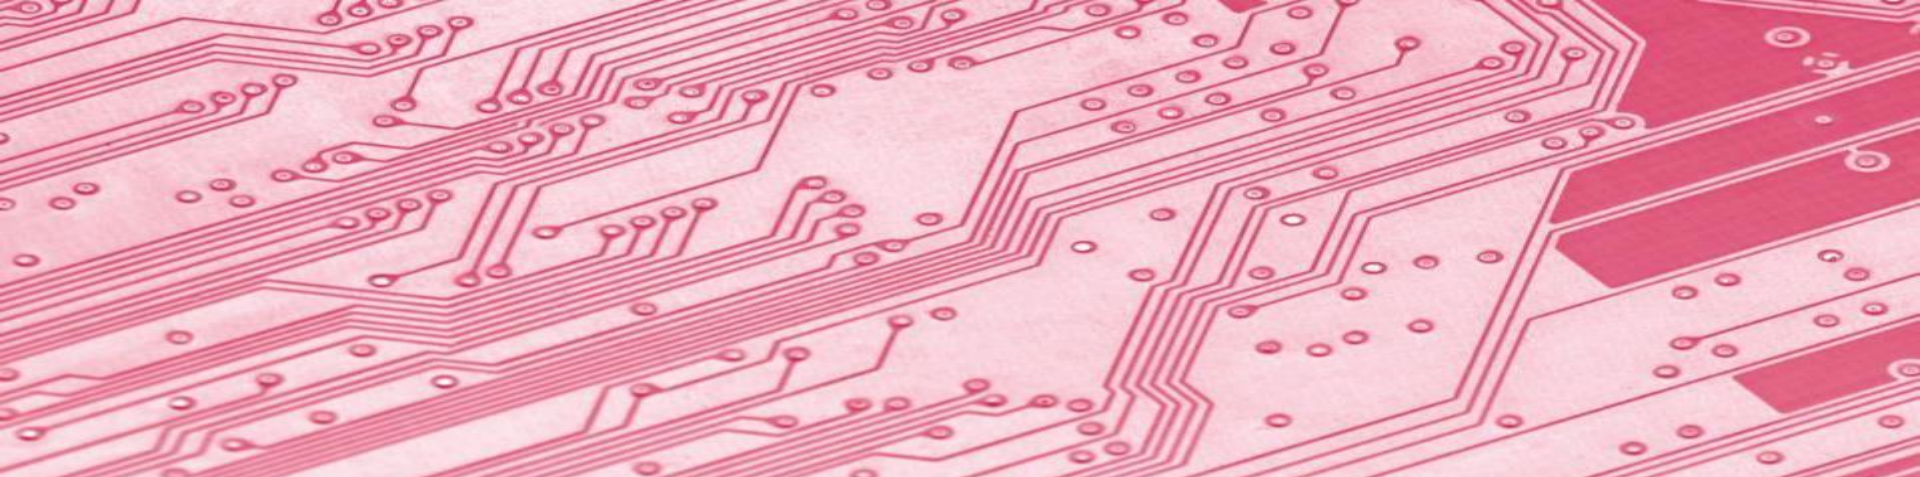

Title for Image (above image could be replaced)

Content Details

PASSIVE SYSTEM ALLIANCE
INPAQ TECHNOLOGY CO., LTD.

Thank you

本資料均屬機密，僅供指定之收件人使用，未經寄件人許可不得揭露、複製或散佈本信件。

This message and any attachments are confidential and may be legally privileged. Any unauthorized review, use or distribution by anyone other than the intended recipient is strictly prohibited. If you are not the intended recipient, please immediately notify the sender, completely delete this documents, and destroy all copies. Your cooperation will be highly appreciated.