
### V60108BT-NOC User manual

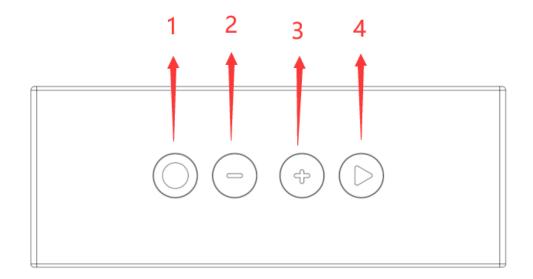

Bluetooth Pair Name: V60108BT

### **Buttons & Functios:**

1. Press & hold 2--3 seconds to turn on/off the speaker.

Quick press to change the lighting mode.

Double click quickly to turn off/on the light.

2. Press and hold to decrease the volume.

Quick press to skip to previous track.

3. Press and hold to increase the volume.

Quick press to skip to next track.


4. Quick press to play/pause the music .

Double click quickly to pair with another speaker .

Press & hold 2-3 seconds to switch to FM radio.

When in FM mode, press it to auto scan channels.

When in FM mode, insert the charging cable as the external antenna for better signal .

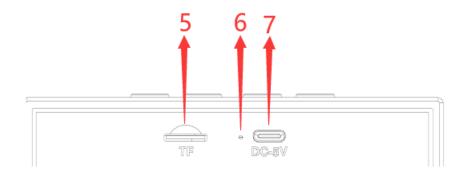

- 5. TF Card slot
- 6. LED Indicator
- 7. DC 5V type-c charging port

# **Package Contents:**

- -Wireless Light Up Pixel Speaker
- Type-C Charging Cable
- -User's Manual with Warranty Information

# **Specifications:**

**Bluetooth Range: Up to 33 feet (10 meters)** 

**Rated Voltage: DC 5V** 

Frequency Response: 80Hz-18KHz

**Charging Interface: Type-C** 

Battery: 3.7V 1200mAh

**Speaker Output: 3W** 

S/N Ratio: ≥65 dBA

## **Charging Your Speaker**

Before you use your speaker, you must first charge it.

-Insert the included Type-C cable into the DC 5V

charging port and insert the other end

into a suitable USB power port such as one on a PC or a

wall adapter.

-The light indicator next to your speaker's charging port

will emit a red light while charging and turn off once

your speaker is fully charged.

## **Powering Your Speaker:**

Press and hold the #1 button 2-3 seconds to turn your speaker ON. A tone will be heard when your speakerpowers ON. Your speaker will go into Bluetooth mode automatically once turned ON. Your speaker will connect to the last paired device. Press and hold the power on button 2-3 seconds to turn o the speaker off.

#### **Bluetooth Mode:**

Your speaker can play music from Bluetooth enabled devices. When the speaker was power on , it is automatically in bluetooth mode . Or you can press and hold the #4 Mode button 2-3 seconds until Bluetooth mode is activated. Turn ON Bluetooth from the device you would like to connect.

Then select pairing name "V60108BT" from the Bluetooth menu to pair.

Note: Keep Bluetooth device within signal range (10 meters).

### **TF Memory Card Mode:**

Insert a TF memory card or similar Micro SD memory card into the TF Card Slot. You will hear atone and the speaker will enter TF card mode automatically. The speaker will play any .mp3 audio files stored on the memory card.

## **Light Mode:**

Your speaker has a colorful light mode. To turn your speaker lights ON/OFF, double click the #1 button.

Press the #1 button to change the lighting mode.

#### FM Mode:

Press and hold the #4 button 2-3 seconds to switch to FM radio mode . when in FM radio mode , press the #4 button to auto scan the FM channels .

When in FM radio mode, please insert your type-c charging cable to act as the external antenna to achieve the better signal.

### **TWS Pairing:**

If you have two "V60108BT" speakers, enjoy high-quality sound by using the TWS pairing function.

Power on both speakers then double click #4 button on either one of the speakers . Then a tone will be heard . The two speakers will pair together .

You can then go to the bluetooth settings menu on your phone. Make sure that bluetooth is turned on . Connect to the device listed as "V60108BT".

#### **FCC STATEMENT:**

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This

equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- —Reorient or relocate the receiving antenna.
- —Increase the separation between the equipment and receiver.
- —Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- —Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator your body.