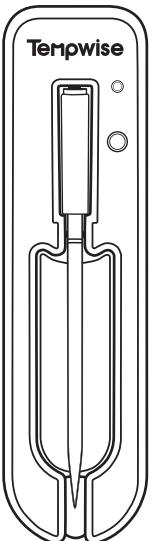
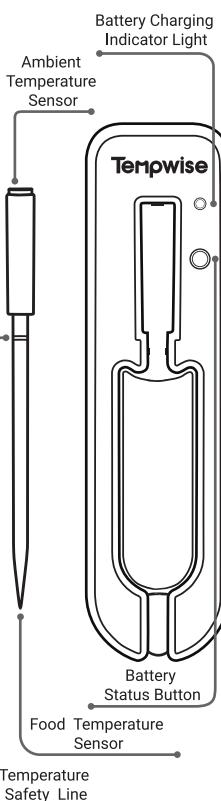
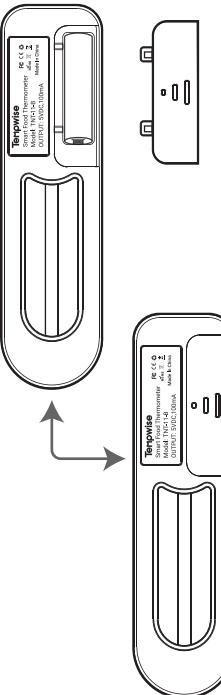
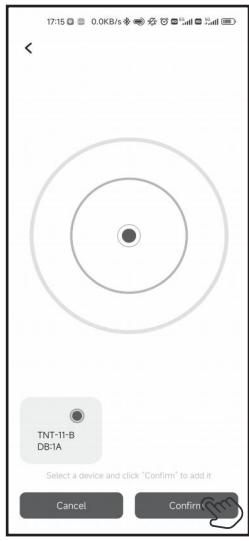


尺寸: 38mmX121mm

类型: 折页

材质: 80G书纸

| | | | | | |
|---|--|--|---|--|--|
| <p>Tempwise</p>  <p>SMART WIRELESS BBQ THERMOMETER</p> <p>TNT-11-B</p> <p>USER MANUAL</p> | <p>01 Overview</p> <p>TNT-11-B is a smart Bluetooth food thermometer that aims to help us obtain accurate food temperatures. It's perfect for use in grills, smokers, cooking, baking, and more.</p> <p>02 Features & Specifications</p> <ul style="list-style-type: none">• Model: TNT-11-B• Charging dock size: 147*39*21.95mm• Battery type: AAA battery• Bluetooth version: Bluetooth LE5.0• Bluetooth range: 30 meters in an open area• Probe charging time: fully charged in 30 minutes• Probe battery life: Lasts more than 8 hours• Probe waterproof rating: IP67• Probe size: 116.5*8*8mm• Probe weight: 6.8 grams• Probe material: food grade 304 stainless steel, food grade PEEK• Food temperature detection range: 0~85°C/32°F~185°F• Short Time Measurement Temperature Range of the Probe: 0°C~+300°C/32°F~+572°F | <p>03 Product Introduction</p>  | <p>1. Indicator Light When the probe is charging, the indicator light will be red. If the probe battery is full, the light will go out.</p> <p>2. Battery Status Button Press the button to check the battery status. If the indicator light turns green, it means that the battery is full. If the indicator light does not light up, the battery is low.</p> <p>3. Charge The Probe Place the probe on the charging dock.</p> | <p>4. Replace Battery: Open the battery cover of the charging base, and then install a new battery.</p>  | <p>04 Download the Tempwise App</p> <ul style="list-style-type: none">• Search the Tempwise App from Google Play or App Store to get it for free, or you can scan the QR code below to download it directly.  <p>Note: 1. Your iOS devices must be running iOS 12 or above to download the app smoothly. 2. Your Android devices must be running Android 7.1 or above to download the app smoothly.</p> <p>• Registration a. Open the app, select your Country/Region, enter your email address, and a verification code will be sent to you. b. Enter the verification code to confirm your identity, and the registration is complete. c. Registering an account is necessary before using the Tempwise app for the first time.</p>  |
|---|--|--|---|--|--|

| | | | | | |
|--|--|--|---|---|---|
| <p>2. Power on the device, then click NEXT STEP to continue.</p>  <p>Make sure the device is fully charged and removed from the charging dock.</p> <p>Next step </p> | <p>3. Connection succeeded.</p>  <p>TNT-11-B DB:1A</p> <p>Select a device and click "Confirm" to add it</p> <p>Cancel Confirm </p> | <p>06 Probe Usage Scenarios</p> <p>Note that the probe should be inserted deep enough into the meat and beyond the safety line.</p>   | <p>08 FCC Requirement</p> <p>Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:</p> <p>(1) this device may not cause harmful interference, and</p> <p>(2) this device must accept any interference received, including interference that may cause undesired operation.</p> <p>Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none">– Reorient or relocate the receiving antenna.– Increase the separation between the equipment and receiver.– Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.– Consult the dealer or an experienced radio/TV technician for help. | <p>07 Product Warranty</p> <p>This item carries a 1-year warranty against defects in either components or workmanship. During this period, products that prove to be defective will, at the discretion of Tempwise, be either repaired or replaced without charge.</p> | <p>Shenzhen MaiWei E-Commerce Co., Ltd.</p> <p>support tempwise@hotmail.com</p> <p>Address: NO 68 Guowei Rd, Xianhu Community, Liangtang, Luohu District, Shenzhen, Guangdong Province, China</p> <p>     </p> <p>MADE IN CHINA</p> |
|--|--|--|---|---|---|