产品说明书 尺寸:50x75mm 材质:80g书写纸 双面印刷 风琴折

RUSAM

RUSAM Wireless Earbud RU52 Product Manual

Specification of Product

Model of Product: RU52
Version: V5.4
Effective Distance: Approx. 10m
Speaker Diameter: ϕ14.2mm
Impedance: 22Ω
Frequency Respinse: 20Hz-20KHz
Microphone Sensitivity: -42dB±3dB
Earphone Input: 5V⎓50mA
Charging Case Input: 5V⎓600mA
Charging Case Output: 5V⎓100mA
Earphone Battery Capacity: 50mAh
Charging Case Battery Capacity: 600mAh
Duration: Approx. 5.5 H (Earphone)
Earphone Charging Time: Approx. 1.5 H
Charging Time of the Charging Case: Approx. 2 H

Item list

Charging case *1 Headphones *1 Charging cable *1

Welcome to RUSAM Wireless Earbud

Take out and pair it

When using for the first time, take out the left and right earphones at the same time. When the blue light of the earphones flash , the earphones will enter the automatic pairing mode.

How to wear headphones correctly

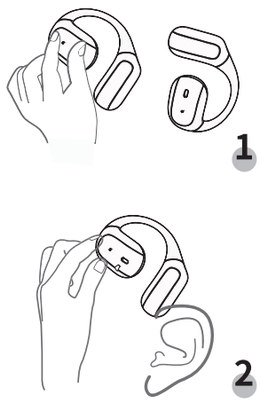

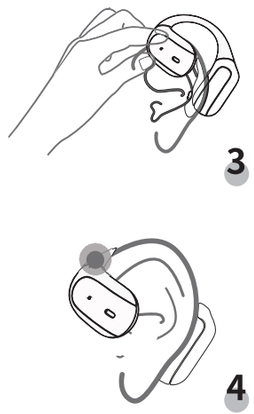

Product Description

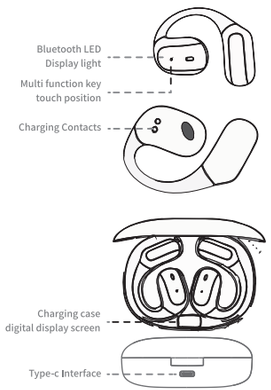

Touch Operation

Connect with Bluetooth device



Open the Bluetooth settings option of the Bluetooth device to be paired, enter the options and find the Bluetooth pairing name of the headset " RU52 ".Click the pairing name to pair.

Indicator Light Description

- When the headset is turned on: the blue light flashing
- When the headset is turned off: After the blue light is on, it goes out
- Pairing status: Blue light flashing
- Connection successful: no light

- Headphone Charging: The blue light on the digital display screen of the charging case is always on, and the blue light on the earphones is always on. After being fully charged, the blue light on the earphones goes out, and at the same time, the digital display screen in the charging case goes out.
- Charging of the Charging case: The digital display screen of the charging case flashes, and after being fully charged, the digital display screen of the charging case always lights up at 100.



Power On
Auto power on: The Earphone are taken out of the charging case, the Earphone will be powered on, with the prompt sound of "Du".
Manual power-on: Long press for 3 seconds, the Earphone will be powered on, with the prompt sound of "Du".
Power Off
Auto power off: Put the Earphone in the charging case, the Earphone will be powered off, with the prompt sound of "Du".
Manual power off: Long press for 5 seconds, the Earphone will be powered off, with the prompt sound of "Du".

Note: After powering on, if it is not paired with a Bluetooth device for 3 minutes, it will automatically shut down; If it is not connected to a Bluetooth device after 3 minutes, it will automatically power off after 3 minutes, with the prompt sound of "Du". "

Once Press

Music mode ▶/▶‖ Play/Pause
Phone mode Call Answer/End

Double Press

Music mode
Double press the right ear: Volume up
Double press the left ear: Volume decreases

Long Press



Wake up voice assistant

When using both ears, press and hold the left ear multi-function button for 2 seconds to activate the voice assistant.
When using one earphone, press and hold the left (or right) earphone for 2 seconds to activate the voice assistant

Phone mode

Press and hold the left (or right) ear multi-function button for two seconds: call rejection

Triple Press

Music mode
Triple press on the left ear: Previous song
Triple press on the right ear: next song

Switch between game mode and music mode

Game mode: Press and hold the multi-function button on the right ear for 2 seconds
Music mode: Press and hold again for 2 seconds

Note 1: When using one earphone, you cannot switch between game mode and music mode.
Note 2: The factory setting defaults to music mode

Clear Bluetooth pairing history

When both ears cannot be paired, you need to clear all connected devices and click the left and right earphones 5 times at the same time.



Wireless pairing mode

1. When there is no pairing record for the left and right earphones, the left and right earphones will automatically pair after they are turned on. After successful pairing, there will be two beeps.
2. When the left and right earphones have pairing records, they will automatically connect back when they are turned on, and the prompt will sound "beep"

RUSAM

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired
2. Changes or modifications not expressly approved by the party responsible for compliance could void the te to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device,FCC Rules. These limits are designed to provide reasonable protection interference in a residential installation. This equipment generates uses and can may cause harmful interference to radio communications. However, there is no guarantee that installation. If this equipment does cause harmful,which can be determined by turning the equipment off encouraged to try to correct the interference by one or more of the following Reorient or relocate the receiving antenna.
Increase the separation between the equipment and receiver.
Connect the equipment into an outlet on a circuit different from that to whichthe receiver is connected.