

CB-3

instructions



5.3 Bluetooth+BR+EDR

Parameter configuration

The mobile Bluetooth headset adopts the duplex advanced asynchronous serial port of DMA; Wireless connection (TWS) realizes wireless stereo, HIFI sound effect, and the left and right sides have complete Bluetooth function, which can be used alone or in pairs.

Bluetooth specification	Bluetooth V5.3+BR+EDR
Support Agreement	a2dp\avctp\avdtp\avrcp\hfp\spp\smp\att\gap gatt\rfcomm\sdp\l2cap profile
frequency range	2.4-2.480GHz
transmission distance	10m
Battery capacity	30mAh for both ears, 300mAh for electric box
Standby time	Two-ear standby for about 420 minutes
Call/play time	Playback time: 260 minutes; Talk time: 240 minutes
headset charging time	Charging time is about 60 minutes
Box Charging time	Charging time is about 60 minutes (Charge the headset 3-4 times)
Box voltage	5V

Headphone use steps


1. Open the upper cover of the charging box, and the headset will automatically turn on and pair.
2. Pair with other devices: open the Bluetooth settings of mobile phone or other devices, search for the Bluetooth name "CD-3", and click Connect Bluetooth.
3. Put the headset into the charging box, close the charging compartment cover, the headset will automatically shut down and enter the charging mode, and automatically power off when full.
4. The left and right headset of the CD-3 wireless headset can be separately connected to other Bluetooth devices.
5. If the CD-3 wireless headset is not connected to the Bluetooth device for 3 minutes, it will automatically shut down.

Headphone touch function description

function	State	Action description
Power on	When charging/shutting down	Press and hold for 3 seconds/take out the headset
Shutdown	At startup	Press and hold for 5 seconds/warehousing charging
Language switching	When the phone is not connected	Three clicks on the left or right ear
Volume increase	During call/song	Double-click the right ear
Vol	During call/song	Double-click the left ear
Next song	When playing songs	Three strikes on the left ear
Previous song	When playing songs	Three strikes on the right ear
Play/Pause	When playing songs	Click the left or right ear
Answer/end	On call/on call/off call	Click the left or right ear
Reject call	When calling	Press and hold the left or right ear for 1.5 seconds
Siri Voice Assistant	Standby/song playing	Press and hold the left or right ear for 3 seconds
Low latency (game)/normal mode switching	After startup	Four clicks on the left or right ear
DUT mode	headset not connected / the phone is not connected	Five clicks on the left or right ear



Operation tips

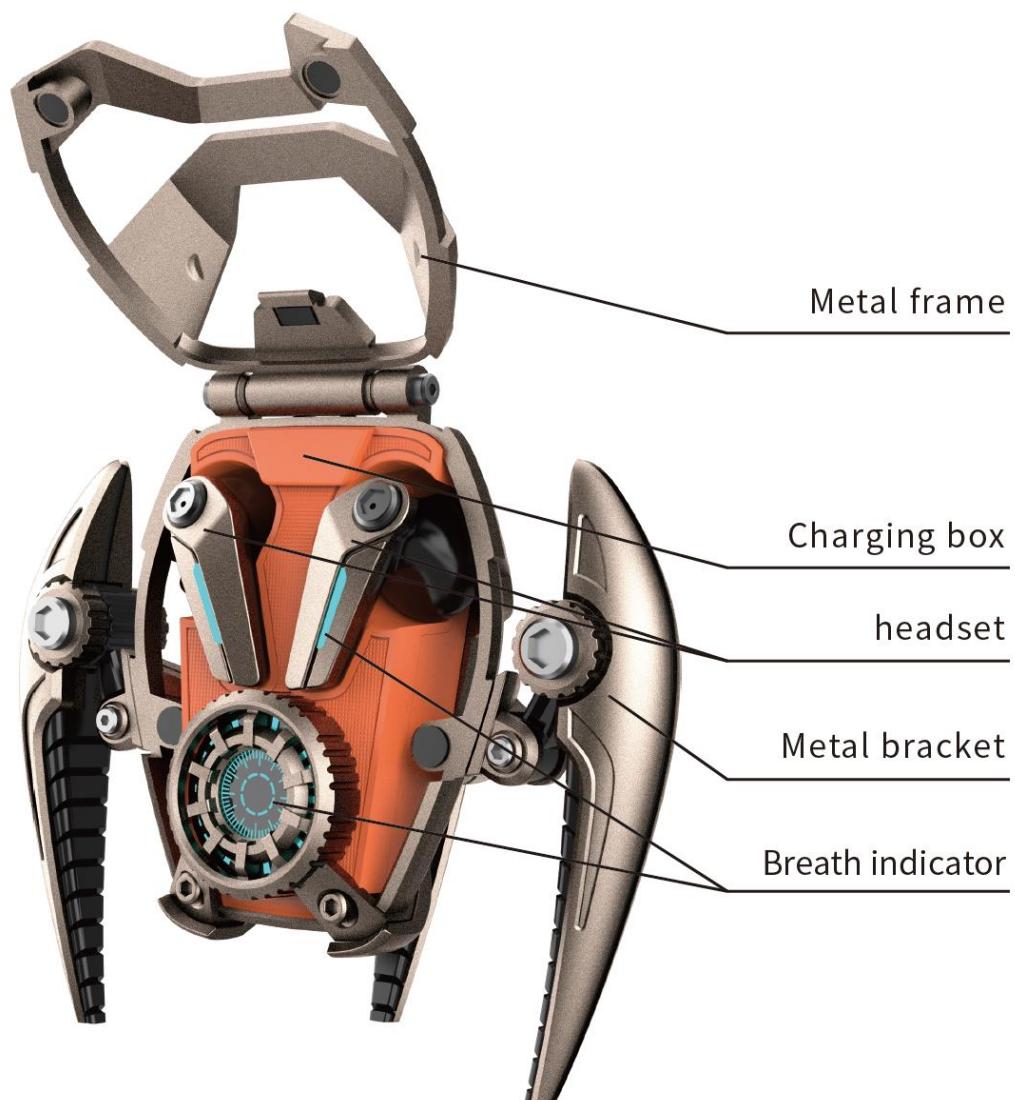



The electric box and metal bracket are detachable

1 Manual pairing is required for first use

Open the mobile phone Bluetooth, search for the device, and display CD-3 on the mobile phone
Click to connect to



2 After the first pairing, open the charging chamber, and it will automatically start up and pair automatically

matters needing attention:

1. Do not treat this product with violence, nor squeeze it with heavy objects, and keep away from high temperature and high humidity environment.
 2. Keep away from high frequency transmitting equipment such as WIFI and router, which will affect the signal reception of the machine and cause the sound to be stuck and disconnected.
 3. Please use this product within 10 meters of the effective environment, and there should be no physical barrier (such as wall) between the Bluetooth device and the headset.
- Note: This product can be connected with any device with Bluetooth function.
- Warning: Do not place the product in an overheated or supercooled environment. Placing the product in an environment where the temperature is higher than 50 °C or lower than - 10 °C will affect the battery performance.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF warning for Portable device: The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.