

Keep the Titan powered

We recommend never letting the Titan keyboard's lithium battery fully deplete. When the battery power is low and the battery LED indicator starts flashing, insert the USB cable and recharge the keyboard timely to ensure uninterrupted work.

If battery runs critically low the battery LED indicator starts flashing fast. To prevent sudden shutdown the backlight turns off.

Note: If the lithium battery runs completely out of power, slide the keyboard on/off switch to Off  so black is visible, **before** connecting the USB cable and recharging. Once the charging cable is connected to a power source, you can slide the on/off switch back to On and start using the Titan keyboard again.

To preserve battery power when the keyboard is set to Bluetooth wireless connectivity, the Titan keyboard uses a Power Saving feature. After 2 minutes of inactivity (no keys pressed) the backlight turns off. After 15 minutes of inactivity the Titan keyboard enters Power Saving Mode and sets the Bluetooth system to stand-by. It is reactivated by pressing any key. Allow it a couple of seconds to reconnect.

Note: When the Titan keyboard is connected to a USB port or an 5V external power supply, the power saving features are disabled despite the keyboard is set to Bluetooth wireless connection.

Cleaning your Titan

We recommend keeping your keyboard clean for an optimal user experience and for a healthy keyboard. Clean only the outside of the keyboard.

Before you clean it, make sure the on/off switch is set to Off 

Use a lint-free cloth and clean the keys gently. Avoid using any strong chemicals such as solvents or abrasives, and be careful not to get any liquids or moisture under the keys or into any openings of the keyboard.

System requirements

- Mac OS X 11.0 or later & M1 chip
- USB-C port and/or Bluetooth receiver

Keyboard specifications

- Dual connectivity: Bluetooth wireless and USB wired connection
- Backlit low-profile keys
- Scissors switch key mechanism
- Key travel 0.075" ~ 2 mm
- 5 LED indicators for: Caps Lock, fn Lock, Battery, Bluetooth connection and USB connection
- Aluminum body
- Dimensions: 16.93" X 4.69" X 0.54" ~ 430 mm X 119 mm X 13 mm

■ Net weight: 20 oz ~ 567 gr

■ Certifications: FCC-ID, CE-RED, UKCA & RoHS

Battery

- Rechargeable lithium battery
- Capacity: 1500mAh
- Battery life without backlight: 300 hours
- Battery life with backlight: up to 40 hours (backlight at 20%)
- Charging time from 0 – 100% est. 4.5 hours

Bluetooth system

- Bluetooth v 5.1
- Connection distance: up to 30 ft ~ 10 m

USB cable

- USB-C to USB-C
- Length: 59.0" ~ 1.5 m

Warranty information

Your Titan Mac Logickeyboard contains no user-serviceable parts. Do not attempt to disassemble or open your Titan Mac Logickeyboard, or expose it to liquids or high temperatures.

The Titan Mac Logickeyboard has a limited warranty covering factory defects for 12 months from the date of delivery. The warranty does not cover defects caused by misuse or from spills into the keyboard.

Any claim must be made to Logickeyboard within the warranty period and must be made in writing with the proof of purchase identifying the product(s), date of purchase, purchase price, and a statement of the defect and its location at the time of claim.

Due to the nature of the products supplied, and the inability of Logickeyboard to control the use of the merchandise on site, faulty products must be sent to a Logickeyboard facility for inspection. Returns are on buyers' expense and risk.

The liability of Logickeyboard for a defective product is limited to either: (i) replacement or repair of the faulty product or (ii) the refund of the purchase price of the defective part, whichever is the smaller amount.

Logickeyboard bears no liability for defects if the product has been altered or modified in any way.

In no circumstances can Logickeyboard be liable for any consequential damage howsoever caused, or any injury, loss or damage which may be caused to any other merchandise or to any loss of business or loss of profit resulting there from.

Protect the environment

The Titan Mac Logickeyboard contains a lithium-ion battery. At the End of Life of the keyboard, don't try to open or crush the battery.

The Titan Mac Logickeyboard must be disposed of separately from household waste. Logickeyboard accepts receiving EOL products to ensure proper waste. However, to save unnecessary transportation of the product, we recommend disposing of it at the nearest recycling site taking electronics waste.

The gift box of the Titan Mac Logickeyboard is made from 100% recyclable cardboard. We recommend wasting it separately at the nearest recycling station taking cardboard.



FCC Statement

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The device has evaluated to meet general RF exposure requirement. The device can be used be in portable exposure without restriction.

WWW.LOGICKEYBOARD.COM

 Disclaimer - the content of this manual is subject to changes without notice. We assume no responsibility for any errors or inaccuracies that may appear in this user guide. Nor do we assume responsibility for any damage on other products or services than supplied or provided by Logickeyboard™

Logickeyboard™ is a trademark of BSP Europe A/S. All other names, product names and trademarks in this documentation are the property of their respective holder. Copyright 2024® by BSP Europe A/S - Denmark



TITAN
Mac® Keyboard




Thank you for purchasing the Titan Mac Logickeyboard. It features backlit keys delivering a precise typing experience, and a dual-connectivity system enabling use as USB wired or Bluetooth wireless – selectable with a keypress.

The Titan keyboard uses a long-lasting rechargeable lithium battery for the Bluetooth system and is designed and optimized for use with Mac OS. However, it can easily be Bluetooth connected to an iPad or iPhone as well, or to two Macs – one corded and another wirelessly – making it ideal to control two workstations.

What's in the box

Titan Mac Logickeyboard | USB cable | User guide

Get to know the Titan Mac Logickeyboard

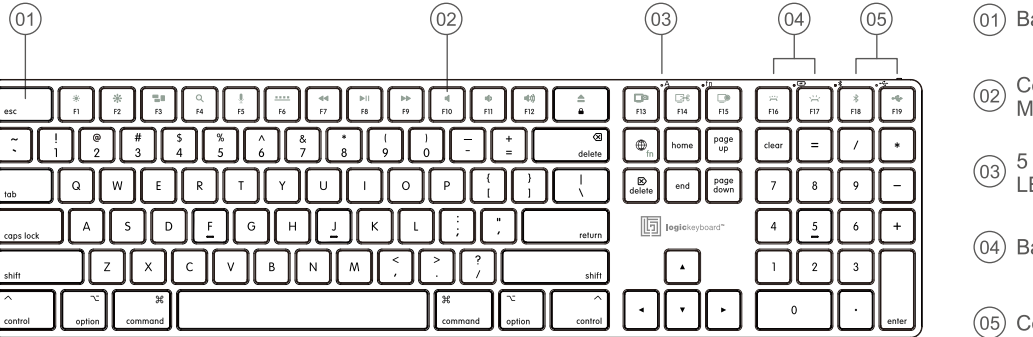

01 Backlit keys

02 Controls for Mac OS functions

03 5 pcs status LED indicators

04 Backlight controls

05 Connectivity controls




06 USB-C wire connection port

07 On/Off switch
On Off

Status LED indicators

When the Titan keyboard's on/off switch is in On position, the keyboard uses 5 LED status indicators. What do they mean?

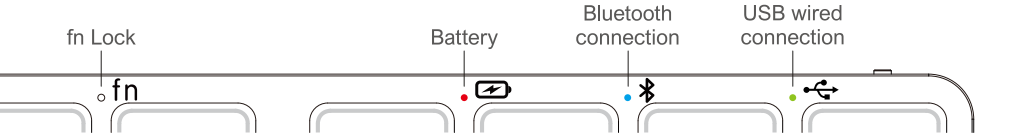

o **Caps Lock [A] and Fn Lock [fn]** LED indicators illuminate in color matching the connectivity setting.

- **Battery indicator (red LED)**
On = Battery being charged
Off = Battery is fully charged, or USB cable is not connected
Slowly flashing (est. 1 flash/sec) = Battery power level is below <5%. Insert cable to recharge.
Fast flashing (est. 3 flashes/sec) = Battery power is critical low <1%. Backlight turns off when battery is critically low.

- **Bluetooth connection (blue LED)**
On = Keyboard is connected wirelessly via the Bluetooth system.
Off = Bluetooth system is deactivated, and keyboard is connected via USB cable.
Slowly flashing (est. 1 flash/sec) = Bluetooth system is in pairing mode, searching for a new host.
Fast flashing (est. 3 flashes/sec) = Bluetooth connection is selected but the Bluetooth system is unable to pair with the last connected host. Make sure the device Titan keyboard is connected to is turned on and within operating distance. After 30 seconds of searching in vain for its host, the Titan keyboard will enter Power Saving Mode.

- **USB wired connection (green LED)**
On = Keyboard is connected via USB cable.
Off = Keyboard is connected wirelessly via the Bluetooth system.
Fast flashing (est. 3 flashes/sec) = USB wired connection is selected, but keyboard is unable to connect. Make sure the USB cable is properly inserted in both the Titan keyboard and your Mac's USB port. To avoid battery power drainage in such unintentional situation, the keyboard will enter Power Saving Mode after 30 seconds.

Let's begin – first use

At first time usage, it is recommended to charge the battery to full power. Connect the included USB cable to your Titan keyboard and a USB port on your Mac, or an external 5V USB charger. The battery indicator will light permanently red when charging. When the battery is fully charged the battery indicator will turn off. You can start using the keyboard before the battery is fully charged. Slide the keyboard on/off switch to position On so green is visible. The three LED indicators for Battery (red) Bluetooth connection (blue) and USB connection (green) will light up for 2 seconds.

Bluetooth pairing

When you power up the Titan keyboard for the first time, it automatically enters Bluetooth pairing mode. The Bluetooth indicator LED (blue) will flash slowly (est. 1 sec flashes). This indicates the keyboard is searching for a Bluetooth host for connection.

1. When you power up the Titan keyboard first time, it automatically enters Bluetooth pairing mode. The Bluetooth indicator LED (blue) will flash slowly (est. 1 sec flashes). This indicates the keyboard is searching for a Bluetooth host for connection. Goto **System Preferences** on your Mac, iPad or iPhone, and choose **Bluetooth**.
2. Search for **TITAN keyboard** and click to connect.
3. When the keyboard is successfully paired, the associated blue Bluetooth indicator LED will light permanently.
4. If you later wish to pair your Titan keyboard to another Bluetooth device, you can easily enter pairing mode again with a **long key press of [Fn+F18]**. Press and hold the two keys for 2 seconds. The blue LED Bluetooth indicator will flash slowly indicating the keyboard is searching for a new host. Follow steps 1 to 3.

USB connection

1. Connect the included USB cable to the Titan keyboard and to your Mac.
2. Press **[Fn+F19]** to switch to USB wired connection.
3. After the keyboard's connectivity is changed to USB wired, the associated green USB indicator will light permanently.

Switch connectivity

For wireless connection press  +  For USB wired connection press  + 

Keyboard controls

The function keys (F-keys) in the top row of the Titan keyboard provide controls for several common Mac OS functions. These controls are accessible by pressing the designated F-key in combination with the **Fn modifier key** simultaneously.

	Dim screen		Decrease speaker volume
	Brighten screen		Increase speaker volume
	Mission control		Eject
	Spotlight Search		Screenshot, entire screen
	Dictation/Siri		Screenshot, selection of screen
	Hide/show dock		Screenshot and recording opt
	Rewind/Back one song		Keyboard illumination down
	Play/Pause		Keyboard illumination up
	Fast forward/Next song		Bluetooth connection
	Mute speaker		USB wired connection

Locking Fn modifier key

To eliminate pressing the Fn modifier key for every Mac OS shortcut control, the Fn key can be locked with the key combination **[Command+Fn]**. When locked the Mac OS controls are directly accessible and the designated fn LED indicator lights up.

Lock/Unlock Fn key  + 

System Lock

To avoid unintentional activation of the System Lock key it requires a long key press.


System Lock  Press and hold for 2 seconds (without the use of Fn key)

Typing options

If two or more keyboard languages are installed under your System Preferences, ex if using other language specific characters, you can toggle between the keyboard languages using the Fn/Globe key.

Change keyboard language  Press and hold for 2 seconds

Alternatively, you can toggle a longer list of keyboard languages, or show emoji symbols using the following key combinations.

Toggle list of keyboard languages  +  **Show emoji symbols**  + 

Backlit keys

The Titan keyboard's backlit keys are adjustable in five levels: 100%, 80%, 60%, 40%, 20%, and 0% off. When using the keys' backlight feature the Titan keyboard consumes more power, and cabled connection is recommended to avoid battery drainage. If the Titan keyboard is being used wirelessly with backlight, we recommend dimming the light as much as possible to save power.

To save battery power in Bluetooth wireless connection, the backlight goes to 0% after 2 minutes of inactivity (no keys pressed) and comes back on with a key press.

The keys' illumination is controlled with the following key combinations.

Keyboard illumination down  +  **Keyboard illumination up**  + 