

Antenna Specification

Product Model: Archer TX23U

Manufacturer: TP-Link Systems Inc.

Test Date: 2025.01.03

Tested By: Yu Sunli *Yu Sunli*

TP-Link Systems Inc.
10 Mauchly, Irvine, CA 92618

Index

1.	Antenna Distribution.....	3
2.	Electrical Characteristics	3
3.	S Parameter Test Data	4
4.	Antenna Peak Gain	4
5.	Antenna Radiation Pattern	5

1. Antenna Distribution





2. Electrical Characteristics

Ant1	
Frequency	2400~2500 & 5150~5895MHz
Impedance	50Ohm
Antenna Type	PIFA
Antenna Gain	0.45dBi@2400~2500MHz -1.64dBi@5150~5250MHz -0.23dBi@5250~5350MHz 2.00dBi@5470~5725MHz
Radiation pattern	Omni-Directional
P/N	6035500227

Ant2	
Frequency	2400~2500 & 5150~5895MHz
Impedance	50Ohm
Antenna Type	PIFA
Antenna Gain	0.08dBi@2400~2500MHz -0.35dBi@5150~5250MHz 0.97dBi@5250~5350MHz 1.57dBi@5470~5725MHz
Radiation pattern	Omni-Directional
P/N	6035500227

3. S Parameter Test Data

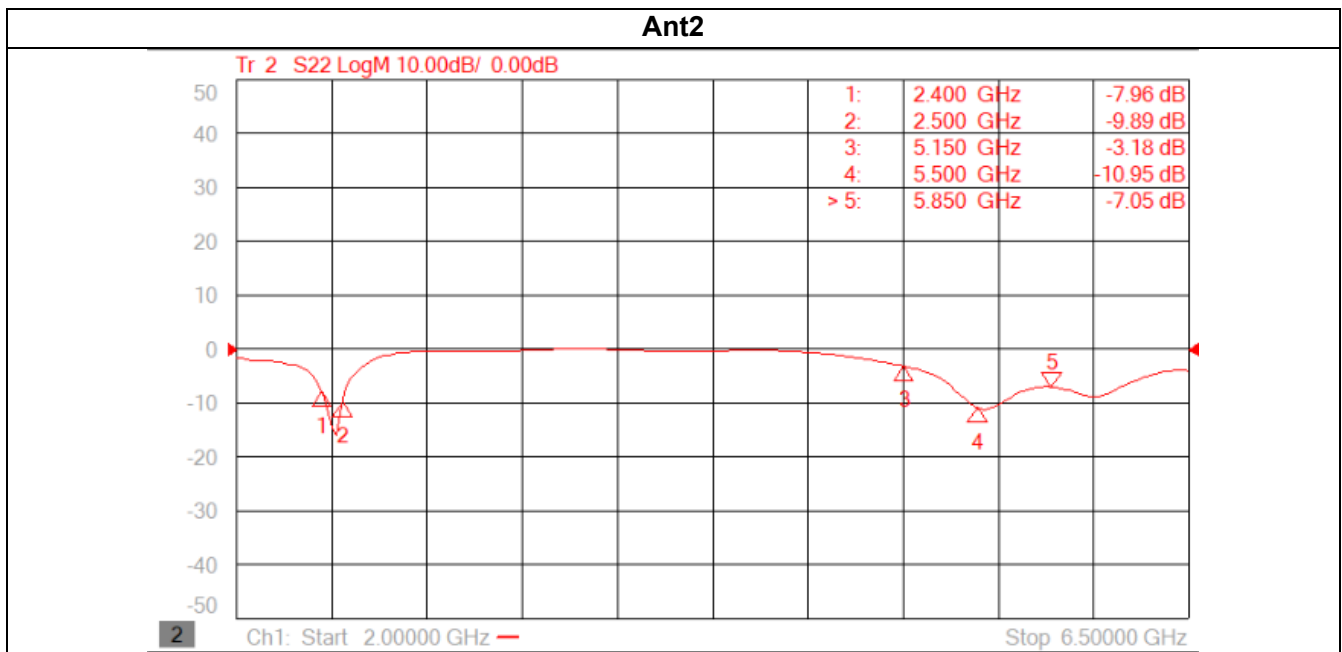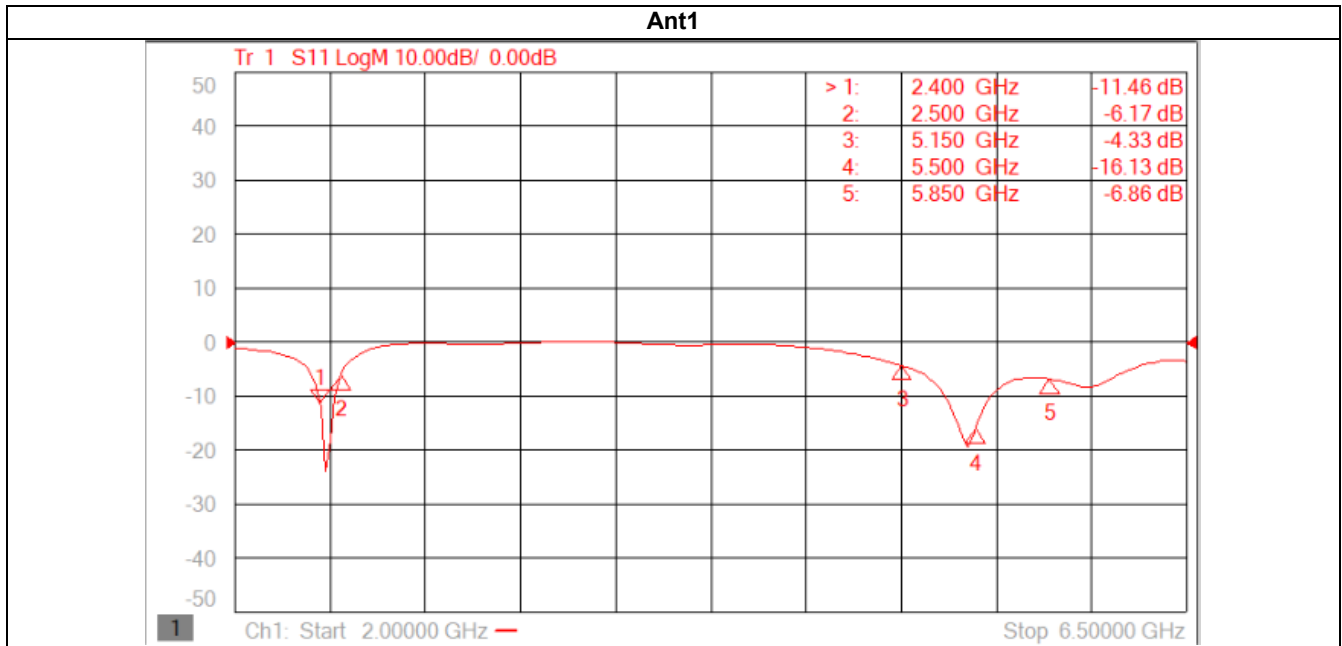

4. Antenna Peak Gain

Frequency	2.45GHz 2400~2500MHz	5.2GHz 5150~5250MHz	5.3GHz 5250~5350MHz	5.6GHz 5470~5725MHz
Ant1 MaxGain(dBi)	0.45	-1.64	-0.23	2.00
Ant2 MaxGain(dBi)	0.08	-0.35	0.97	1.57
Max Gain(dBi)	0.45	-0.35	0.97	2.00

5. Antenna Radiation Pattern

