

# ZIUMIER

Wireless  
Gaming Headset

---

## M09



User Manual

## Table of Contents:


---

Package Contents.....	3
Overview .....	4-5
Specifications.....	6
2.4G Wireless Mode: Setting up with PC/MAC.....	7
2.4G Wireless Mode: Setting up with PlayStation 4 ..	8
2.4G Wireless Mode: Setting up with PlayStation 5 ..	9
Bluetooth Mode Setup .....	10
Switching Wireless Mode and Bluetooth Mode.....	11
Wired Connection Mode.....	12
Charging the Headset.....	13
Troubleshooting .....	14

## Package Contents:



ZIUMIER M09 Wireless Gaming Headset (x1)




USB Type-C Charging Cable (x1)




USB Wireless Adapter(x1)



Detachable Microphone(x1) and Windscreen(x2)



Type-C to 3.5mm Audio Cable(x1)




3.5mm 1-to-2 Y Cable (x1)



User Manual(x1)

## Controls:

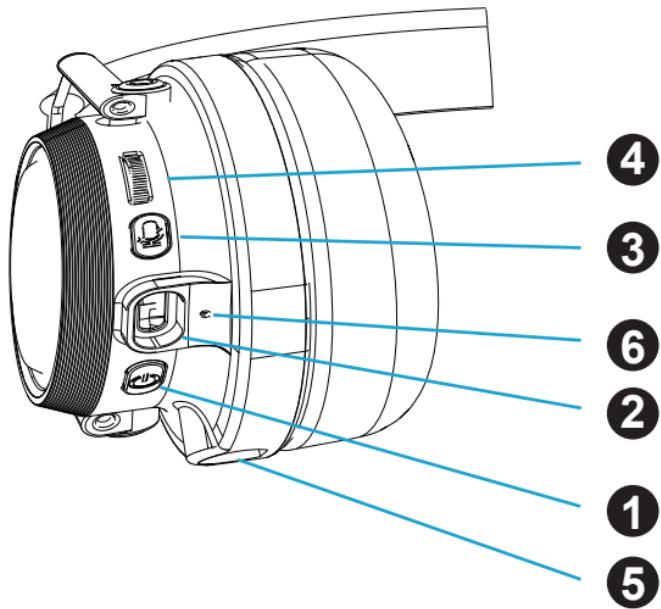

- |                                     |  |
|-------------------------------------|--|
| <b>1</b> Power Button               | <b>2</b> Type-C Charging Interface       |
| <b>3</b> Mic Mute Button            | <b>2</b> Type-C to 3.5mm Audio Interface |
| <b>5</b> Detachable Microphone Hole | <b>4</b> Volume wheel                    |
|                                     | <b>6</b> LED Indicator                   |

# Operation Guide:

## Power Button

-   **X3** Press for 3 seconds: power on/off
-   **X1** Click: Play/Pause, Answer/Hang on
-   **X2** Double-click: Light on/off

For to conserve battery life, we recommend turning off the LED Lights

## Mic Mute Button

-   **X1** Click: Microphone on/off
-   **X2** Double-click: Game Mode/Music Mode

- 1:1:The headset plays a beep notification indicating the mic is turned on with a Blue LED indicator is ON.
- 2:The headset plays a double beep notification indicating the mic has been turned off, with an LED indicator OFF.
- 2:1:Music mode sound effect: suitable for listening to music, conference videos, watching movies, online classes, etc.
- 2:Game mode sound effect: enhance the background sound effect of the game, increase the low frequency, suitable for use when playing games
- 3:The default mode is the music mode when turning on the headset every time

## Volume wheel

 **Scroll uoward:Volume +**    **Scroll downward:Volume -**

Ear Cup LED Indicator on Headset

Status	LED
Searching and Paring	Flashing Blue LED
Connected	Solid Blue
Microphone ON	Solid Blue ON
Microphone OFF	LED Lights OFF

LED Indicator on USB Adapter

Status	LED
Searching and Paring	Flashing Blue LED
Connected	Solid Blue

Headset will play a sound notification when the battery level is less than 10%

## Specifications:



### **Headphone**

Driver: 50mm with neodymium magnets  
Frequency response: 20Hz – 20 kHz  
Frequency range: 2.402-2.480GHZ  
Speaker Impedance: 32Ω  
Sampling Rate:48KHZ



### **Microphone**

Polar pattern: Omnidirectional microphone,  
Noise-cancelling  
Microphone size: 6.0\*5.0mm



### **Battery**

Type: lithium-polymer  
Battery Working Hours: 24 hours (Light off)  
Charging Time: 2.5H  
Rated Power: 5V 1A




### **Wireless**


Type: 2.4 GHz  
Wireless range: Up to 20 meters

# 2.4G Wireless Mode: Setting up with PC / MAC


## Audio Settings:

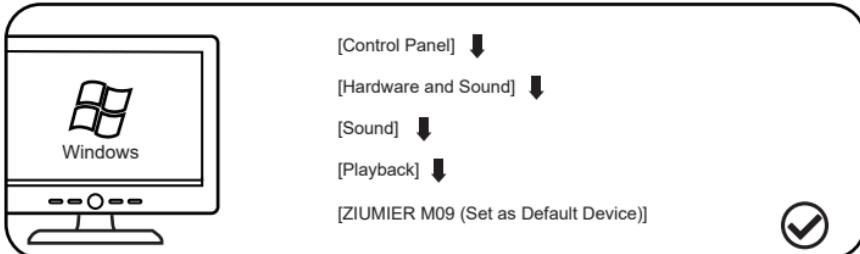

## Microphone Settings:

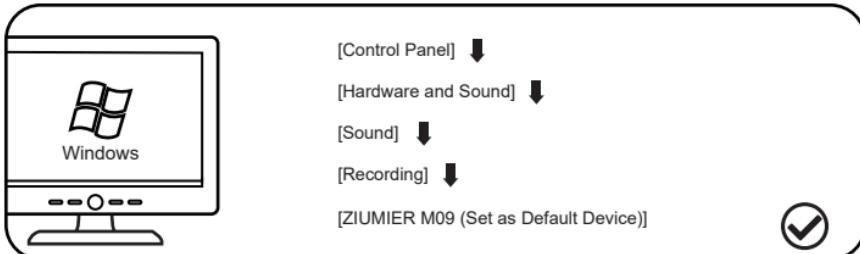

## macOS:

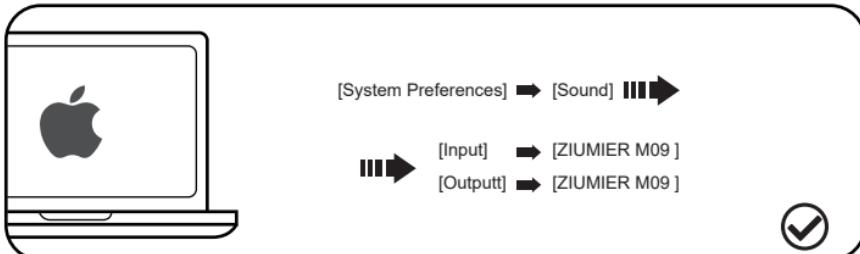


# How to Use:


## PlayStation® 4 / PlayStation® 5:

Connect the USB Dongle or the 3.5 mm audio cable with your PS® 4/PS® 5 . Then follow the steps below to check the audio settings to ensure your PS® 4/PS® 5 automatically switch to play audio and turn on microphone.


### PS® 4

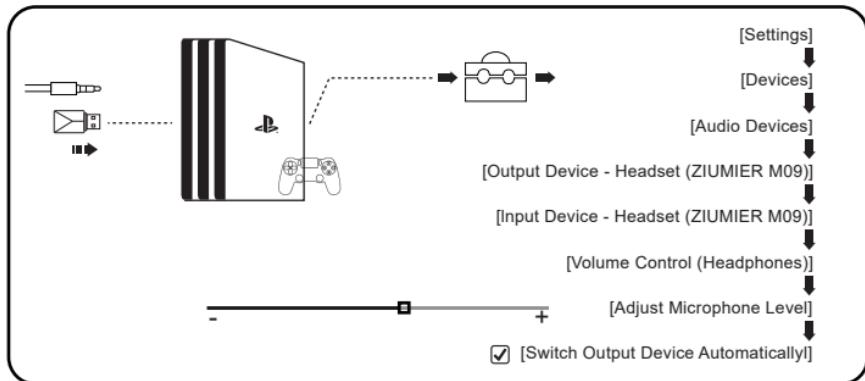

### PS® 5

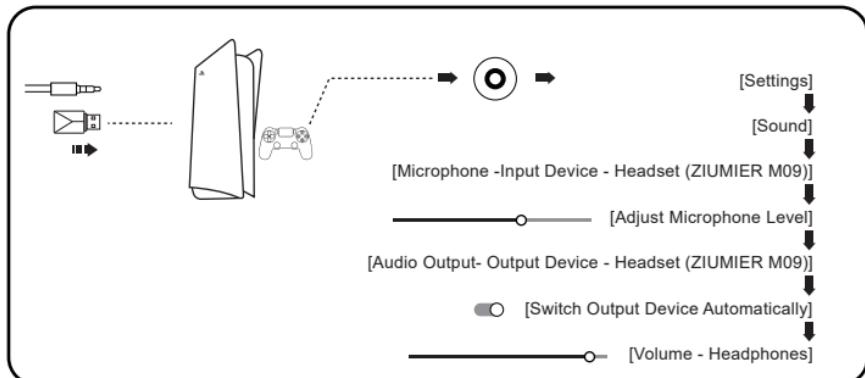


## Bluetooth Mode Setup:

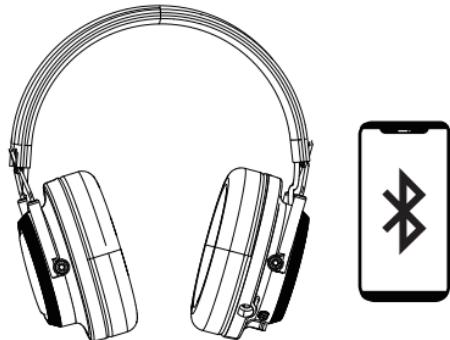

1. Turn on the headset, the blue light flashes quickly, the headset enters the search state and makes sure the Wireless USB adapter is not plugged into the USB port at this time.
2. Turn on the Bluetooth of the connected device, search for the name "ZIUMIER M09" and pair it. The blue light of the headset is solid blue when the pairing is successful.
3. When the headset is connected to the mobile phone and is playing, short press the power button to realize the play/pause function.
4. When the headset is connected to the mobile phone, when there is an incoming call, short press the power button to answer the call; during a call, short press the power switch key to hang up the call

## Switching Wireless Mode and Bluetooth Mode:

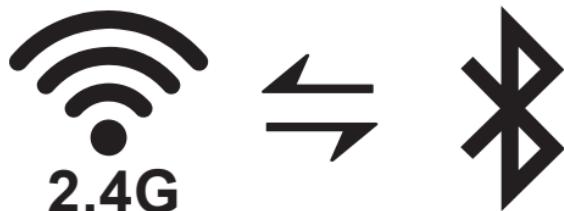

### 1. Switch from 2.4G mode to Bluetooth mode:

① Unplug the wireless USB adapter from your device directly, blue light flashes slowly this time.


② Open the device's Bluetooth mode, which can be paired and connected with a Bluetooth device.

\*If the headset is not connected to the USB Dongle after turning it on, it can be paired and connected with a Bluetooth device.

### 2. Switch the Bluetooth mode to 2.4G mode:

When the headset is connected to the Bluetooth of the mobile phone, Long press the microphone mute button for 3 seconds to disconnect the Bluetooth connection with the mobile phone, the blue light flashes slowly, and the USB Dongle can be paired and entered into the wireless mode.

## Wired Connection Mode:

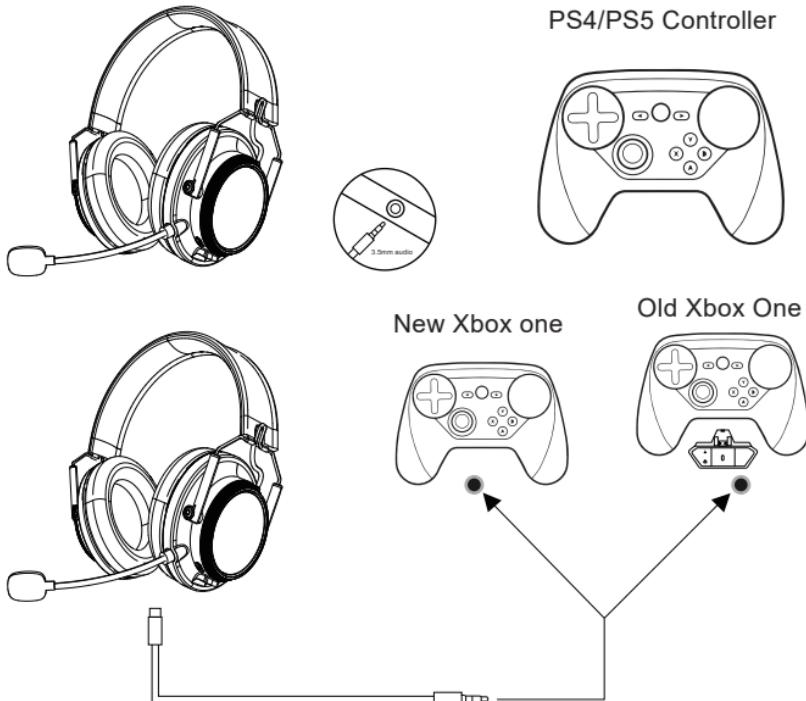

**The headset can be a wired headphone with a 3.5mm audio cable.**


**To use the headset in Wired headphone mode:**

1. Connect the Type-C port of the audio cable to the headset.
2. Connect the other connector of the audio cable to the 3.5mm headphone jack on your devices.

**NOTE:**

- \* The Mic mute button is not functional in this configuration.
- \* In a wired connection, NO need to press the power button to power on.

## Charging the Headset:

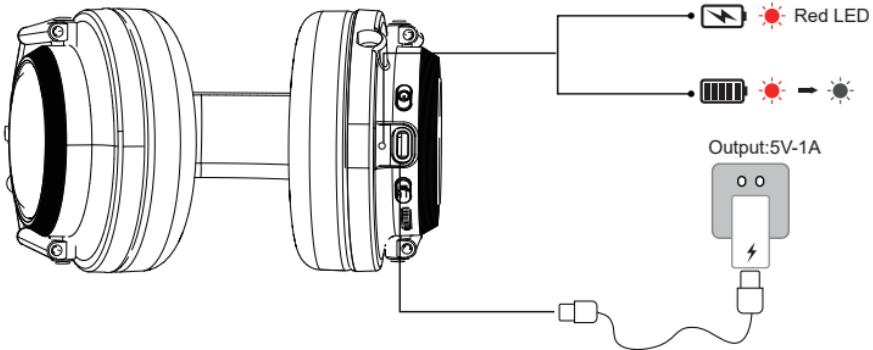

1. It is recommended to fully charge your headset before first use.
2. When the battery is lower than 10%, the Headphones will report a "beep" sound and the headphone needs to be charged.
3. When charging the headset the headset status LED will turn red and turn off when fully charged
4. We do not recommend using it while charging, it will affect the battery life and may cause the battery to heat up
5. Please charge your headset with 5V 1A power adapter or via the USB port of your PC.

# Troubleshooting:

## Using Tip:

When you receive the headset for the first time, we recommend fully charging it before using it.

## Can't turn on the headset:

- The headset will automatically turn off after 10 minutes of inactivity.
- Charge the battery.
- When the headset is not used for a long time, the battery may be in a dormant state, it is recommended to use a mobile phone charger to charge the headset to activate the battery

## The headset is not connected to the mobile device:

- On mobile devices, turn off the Bluetooth function and turn it back on. Then try pairing again.
- Remove "ZIUMIER M09" from the mobile device's Bluetooth list. Then try pairing again
- Move your mobile device close to the headset, away from other distractions or obstacles.
- Try pairing with another mobile device.

## No sound:

- Make sure the headset is turned on and the battery is charged.
- Make sure your headphones and mobile device (or music app)are turned up
- Try another music program.
- Try pairing with another mobile device.
- If two mobile devices are actively connected, first make sure the other devices are suspended.

## Poor sound quality:

- Keep your mobile device close to the headset and away from any distractions.
- Try pairing with another mobile device.

## Automatic shut-down

- Turn on the headset, if the pairing is not successful after 10 minutes, the headset will automatically shut down.
- when the headset is successfully paired with Bluetooth/2.4G, if there is no audio output for 10 minutes, the headset will automatically shut down.

## FCC Warnings:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different

from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction