

Operating Mnaual for Micro WIFI Electronic Telescope (GS-007)



[iOS / Android](#)

[iOS / Android \(scan QR code to download APP\)](#)

This is an innovative high-tech electronic product. Wireless intelligent monitoring telescope system of WiFi signal is very interesting and widely used. It is not directly connected to your phone and tablet PC over the network, it inherits the function of traditional surveillance camera, but also has more advantages. It monitors longer distances and is easier to install. It can be carried around without wiring, power, control and storage main engines.


Scope:

Watching videos and taking pictures from a long distance, various sports events, outdoor concerts, villas, manors and


farms, anti-theft, factory monitoring, police investigation and handling cases, wild hunting, animal and bird research, astronomical and meteorological observation, and long-distance monitoring of industrial dangerous goods production.

Main parameters:

Connect devices:	Apple phones, IPAD, Android phones, Android tablet PCs,
Sensitive pixels:	HD 2 million
Magnification:	70x (manual focusing structure)
Wireless distance	Up to 50 meters without obstructions
Battery specifications:	Built-in 2000 mA Li-polymer battery, the battery can be used continuously for 6 hours, and can also work continuously for 24 hours with external power supply.
Charging interface:	USB Micro (5V)
Support:	Two-section telescopic miniature metal tripod support
Product size:	Main engine 150*45 (MM) packing box
Product weight:	320g (main engine 100g, support 130g, packaging box 90g)

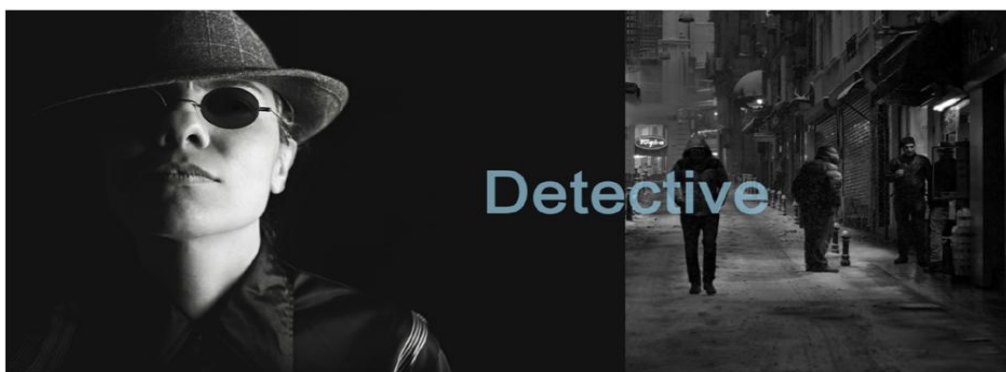


手机原始拍摄效果图

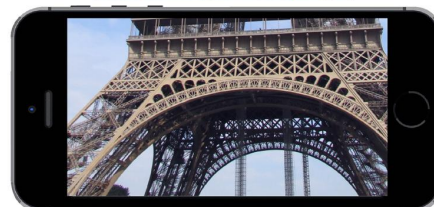

手机连上数码望远镜后拍摄的效果

The picture below shows the actual contrast effect between the pictures taken by digital camera and digital telescope

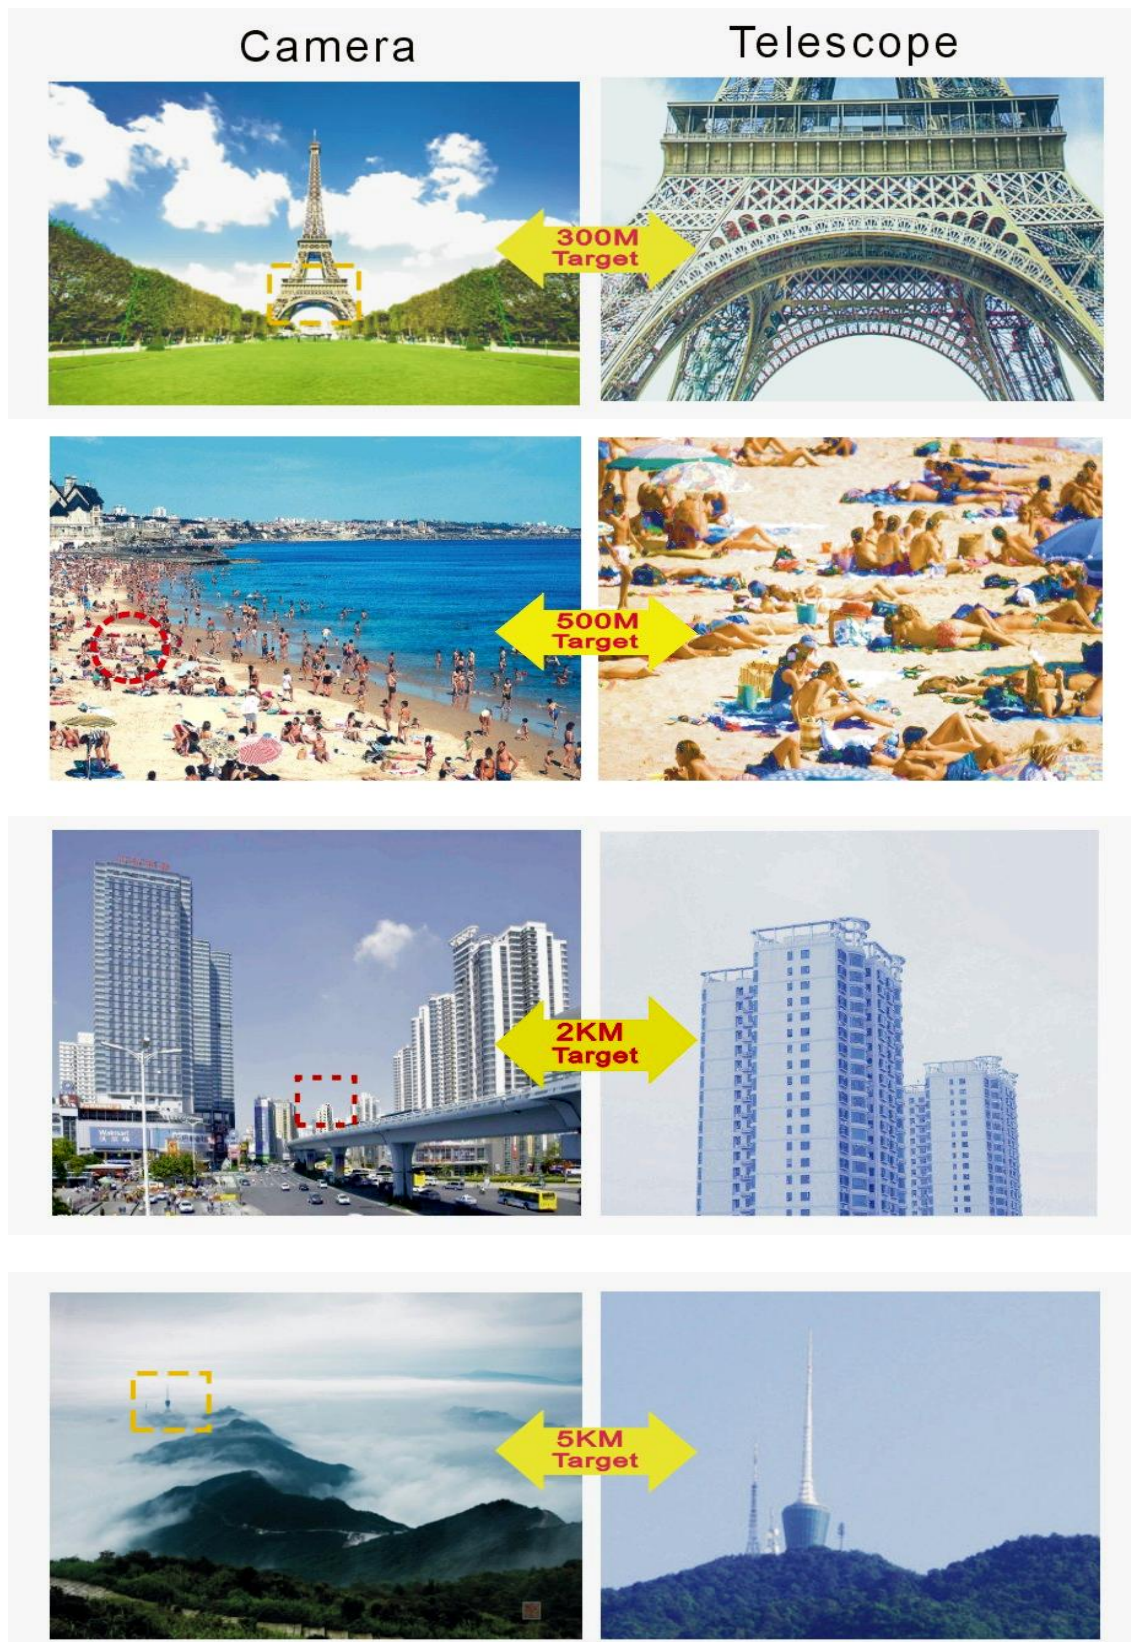

Fuselage function key diagram:

- 1: Power on key; Press long for two seconds to turn on/off
- 2: Charging interface: When microUSB (5V) is charged, the red light is on, and the full blue light is on for a long time.
- 3: Indicator: The blue light is on for a long time. When it is connected, the blue light flashes and the connection is successful.

Soft use guide:

I: Software installation:

- 1: Scan the QR code, 2: Select the suitable device system software to download and install 3: Then please find the icon named GS-WIFI on your mobile device desktop, 4: Click the software to open



4

1--"2--" 3--"4

II. WIFI telescope and connected device IOS/Android

- 1: Turn on the power key on the main engine, and the blue light on for a long time. This is a standby state.



2: Turn on the WIFI search settings on the mobile phone or tablet PCs and find the device named after the first two letters of GS; GS-***** (Remarks: * represents the sequence number, each device is different) Select it to connect, and the blue indicator lamp is converted to slow flashing, that is, the connection is successful.



3: Open GS-WIFI software on the desktop of the device, and you can use it.

Interface and functions of APP software

INTERFACE INTRODUCED

THE NEW UPGRADE IS MORE PRACTICAL

INTERFACE FUNCTIONS OF APP SOFTWARE ARE SHOWN IN THE FIGURE BELOW

SOFTWARE APPLICATION:

- 1: Photo taking function (1600*1200) save on mobile device (mobile phone, tablet COMPUTER)
- 2: Video recording function (1080P) save on mobile devices (mobile phones, tablets)
- 3: mobile detection and control; Objects of interest (people, animals, cars, etc.) appear in the distance, Or when moving, will give a warning sound, and trigger automatic video saving. Can be applied to detectives, Hunting surveillance and so on.
- 4: cross line function, convenient to observe the object for positioning
- 5: can display the screen up, down, left, right, four directions of rotation observation
- 6: picture contrast, can be compared and analyzed before and after the two pictures.

Software application:

- 1: Photo taking (1600*1200) is saved on the mobile device (mobile phone, tablet PC)
- 2: Video recording (1080P) is saved on mobile device (mobile phone, tablet PC)
3. Mobile detection and control; When the concerned objects (people, animals, cars, etc.) appear or move in the distance, they will give a warning sound and trigger automatic video saving. It can be used in

detective, hunting monitoring and other fields.

4. Cross line function, which is convenient to locate the observed object

5: Can rotate and observe the display screen in four directions: up, down, left, right

6: Picture comparison, which can compare and analyze the front and back pictures.

Parts list:

1: Main engine, 2: Tripod support, 3: Charging cable, 4: Operating Manual,
5: Packaging box

Handbuch zum elektronischen Micro-WIFI-Teleskop (GS-007)



iOS/Android

Apple/Android (Scannen Sie den QR-Code, um die APP herunterzuladen)

Dies ist ein innovatives und sehr interessantes schwarzes High-Tech-Elektronikprodukt. Das drahtlose intelligente Überwachungsteleskopsystem für WLAN-Signale ist sehr interessant und weit verbreitet. Es stellt eine direkte Verbindung zu Ihrem Mobiltelefon und Tablet her, ohne das Netzwerk zu nutzen. Es übernimmt die Funktionen herkömmlicher Überwachungskameras und bietet weitere Vorteile. Es kann größere Entfernungen überwachen und ist einfacher zu installieren. Es kann überall hin mitgenommen werden, ohne dass Verkabelung, Stromversorgung, Steuerung und Speicherhosts erforderlich sind.

Anwendungsbereich:


Videobetrachtung und -fotografie über große Entfernungen, verschiedene Sportveranstaltungen, Open-Air-Konzerte, Villen, Herrenhäuser, Diebstahlprävention auf dem Bauernhof, Fabriküberwachung, polizeiliche Ermittlungen und Maßnahmen, Wildjagd, Tier- und Vogelforschung, astronomische und meteorologische Beobachtung, Fernüberwachung der industriellen Gefahrgutproduktion warten.

Die wichtigsten Parameter:

Verbindungsansatzung Verbindungsansatzung	Apple-Handy, IPAD, Android-Handy, Android-Tablet,
Lichtempfindliches Bild Element:	HD 2 Millionen
Vergrößerung Anzahl:	70-fach (manuelle Fokussierung)
Drahtlose Entfernung	Bis zu 50 Meter ohne Behinderung
Batterieanzeige Gitter:	Eingebauter 2000-mAh-Polymer-Lithium-Akku, der Akku unterstützt 6 Stunden Dauerbetrieb und kann auch an eine externe Stromversorgung angeschlossen werden, um 24 Stunden lang ununterbrochen zu arbeiten.
Ladeanschluss □:	USBMicro(5V)
Halterung:	Zweiteiliger, teleskopierbarer Miniatur-Stativ aus Metall
Produktgröße:	Host 150*45 (MM) Verpackungsbox
Produktgewicht:	320g (Hauptgerät 100g, Ständer 130g, Verpackung 90g)



Original-Renderings von Handyaufnahmen



Der Effekt der Aufnahme von Bildern nach dem Anschließen eines Mobiltelefons an ein digitales Teleskop


Das Bild unten zeigt den tatsächlichen Vergleich von Bildern, die mit einer Digitalkamera und einem Digitalteleskop aufgenommen wurden.

Kamera

Fernrohr



Abbildung der Funktionstasten am Gehäuse:

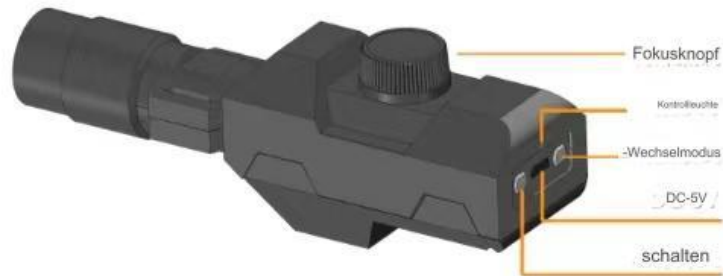

1: Ein-/Ausschaltaste; zum Ein-/Ausschalten zwei Sekunden lang gedrückt halten

2: Ladeschnittstelle: MicroUSB (5 V), das rote Licht leuchtet beim Laden und das blaue Licht leuchtet, wenn es voll ist.

3: Anzeigelampe, das blaue Licht leuchtet immer und zeigt an, dass die Verbindung aussteht, und das blaue Licht blinkt, die Verbindung ist erfolgreich.

Soft-Nutzungsanleitung:

1: Softwareinstallation:

1: Scannen Sie den QR-Code, 2: Wählen Sie die für Ihr Gerät geeignete Systemsoftware zum Herunterladen und Installieren aus. 3: Suchen Sie

dann bitte nach dem Symbol mit dem Namen: GS-WIFI auf dem Desktop Ihres Mobilgeräts. 4: Klicken Sie auf die Software, um sie zu öffnen



2: WIFI-Teleskop und Verbindung zum Gerät IOS/Android

1: Schalten Sie den Netzschalter am Host ein. Das blaue Licht leuchtet immer. Dies ist der Standby-Zustand.

2: Öffnen Sie die WLAN-Sucheinstellungen auf Ihrem Telefon oder Tablet und suchen Sie diejenige, die mit den ersten beiden Buchstaben von GS beginnt.

Benanntes Gerät; GS-***** (Hinweis: * steht für die Seriennummer, die für jedes Gerät unterschiedlich ist) Wählen Sie es zum Verbinden

aus, und das blaue Licht der Anzeigelampe wechselt zu langsamem Blinken, was die Verbindung anzeigt ist erfolgreich.



3: Öffnen Sie die GS-WIFI-Software auf dem Gerätedesktop und Sie können sie verwenden.

Die Benutzeroberfläche und Funktionen der APP-Software sind in der Abbildung dargestellt.



Computerprogramm:

1: Die Kamerafunktion (1600*1200) wird auf dem Mobilgerät (Handy, Tablet) gespeichert

2: Aufnahmefunktion (1080P) gespeichert auf mobilen Geräten (Handys, Tablets)

3: Bewegungserkennung und -steuerung; das betreffende Objekt (Menschen, Tiere, Autos usw.) erscheint in der Ferne, oder

Bei Bewegung ertönt ein Warnton und die automatische Videospeicherung wird ausgelöst. Es kann in der Detektiv-, Jagdüberwachungs- und

anderen Bereichen eingesetzt werden.

4: Fadenkreuzfunktion zur Erleichterung der Positionierung von Beobachtungsobjekten

5: Der Bildschirm kann in vier Richtungen gedreht und beobachtet werden: nach oben, unten, links, rechts usw.

6: Bildvergleich, Sie können die beiden Bilder vorher und nachher vergleichen und analysieren.

Liste der Einzelteile:

1: Host, 2: Stativ, 3: Ladekabel, 4: Handbuch, 5, Verpackung

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.