


BT Audio Antenna Report

Manufacturer: Wenzhou Xiangjia intelligent technology Co., LTD
M/N: O2ANT

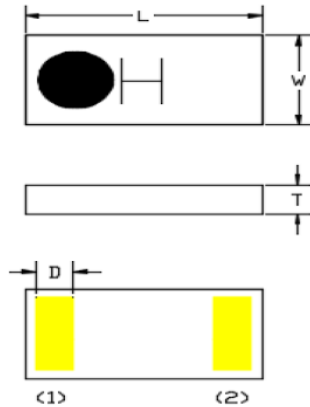

Dimension (mm)	
L	3.20+-0.15
W	1.60+-0.15
T	0.55+-0.10
D	0.50+-0.15

No.	Terminal Name
1	Feeding
2	Soldering

1.Gain and Efficiency

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	-0.12	-6.63	21.24
2410	-0.23	-6.25	22.7
2420	-0.25	-6.63	22.86
2430	0.36	-5.68	27.24
2440	-0.52	-6.25	24.3
2450	-1.14	-5.74	26.25
2460	-1.01	-6.06	25.27
2470	-0.33	-5.7	26.19
2480	-1.27	-6.25	23.25
2490	-1.06	-6.35	22.84