





Manufacture : Shenzhen Oukai Automotive Technology Co., Ltd
Add : 208, Building B, Tea Tree Industrial Zone, Xiaweiyuan New Village, Gushu Community, Xixiang Street, Bao'an District, Shenzhen

Model name : C9-ANTBT2.4G


Frequency ID	1	2	3	4	5	6
Frequency (MHz)	2400	2420	2440	2460	2480	2500
Efficiency (dBi)	-6.82	-7.41	-7.20	-6.86	-6.51	-6.29
Gain (dBi)	0.38	-0.11	0.09	0.43	0.72	0.77
Efficiency (%)	20.79	18.17	19.08	20.59	22.36	23.47
Directivity (dB)	7.20	7.30	7.28	7.30	7.22	7.07
Peak Gain Position (Theta)	135.00	135.00	135.00	135.00	135.00	135.00
Peak Gain Position (Phi)	120.00	120.00	120.00	120.00	120.00	120.00
Efficiency ThetaPol (%)	7.72	6.81	7.26	7.90	8.62	8.84
Efficiency PhiPol (%)	13.07	11.36	11.82	12.69	13.73	14.64
Upper Hem. Efficiency (%)	8.97	7.81	8.15	8.60	9.28	9.78
Lower Hem. Efficiency (%)	11.82	10.36	10.93	11.99	13.08	13.69



wide*length: 6*19mm

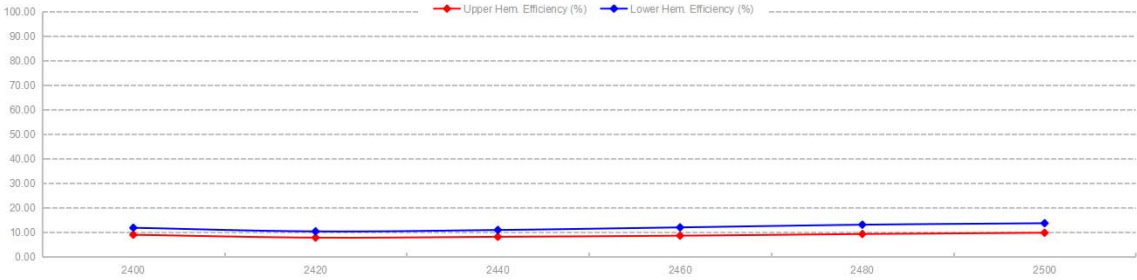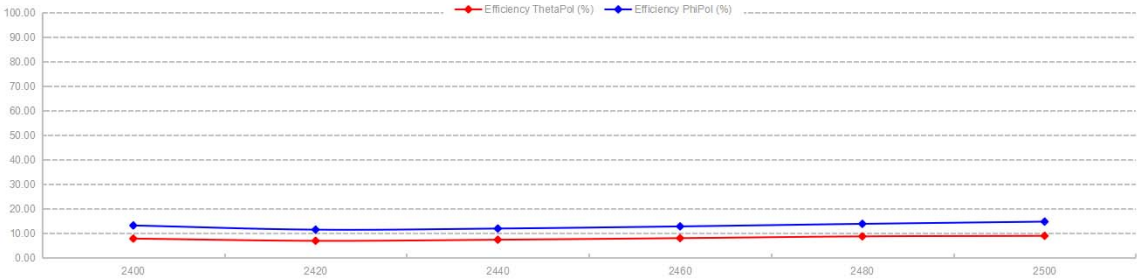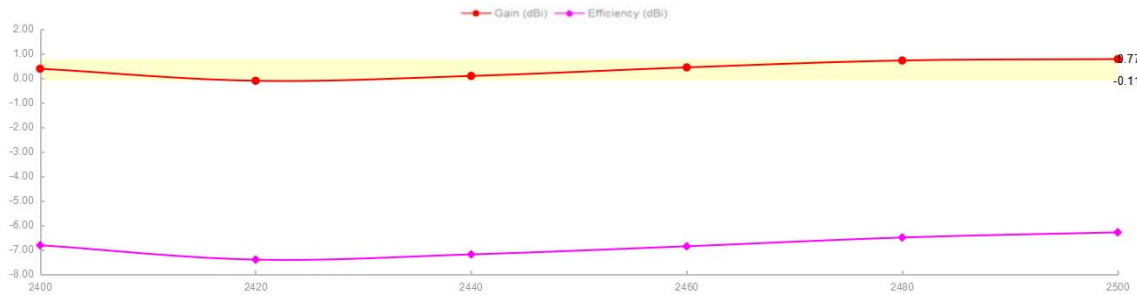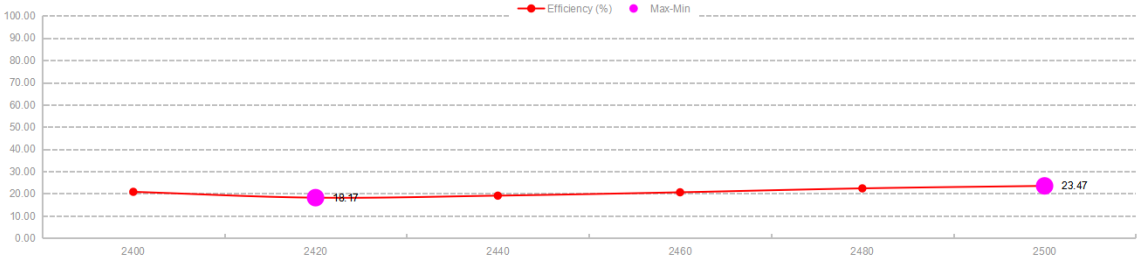

VSWR

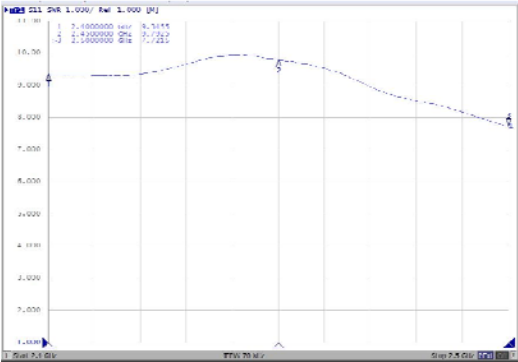

天线实物图

SMITH

