


ANT data sheet

Manufacturer:	ShenZhenSmartTechnologyCo.Ltd
Add:	A-D Axis And 17-20-D17, Floor 4, Building 4, Saige Science Park, No. 120, Zhenxing Road, Licun Community, Shen Guangdong China
Model:	K306-TX1
Date:	October 11, 2024
Versions:	--

Contents



1. Test equipment list	- 2 -
2. Test setup	- 3 -
3. Performance parameter	- 4 -
4. VSWR Test Data	- 4 -
5. Gain and Effi	- 5 -
6. Test Directional diagram	- 6 -

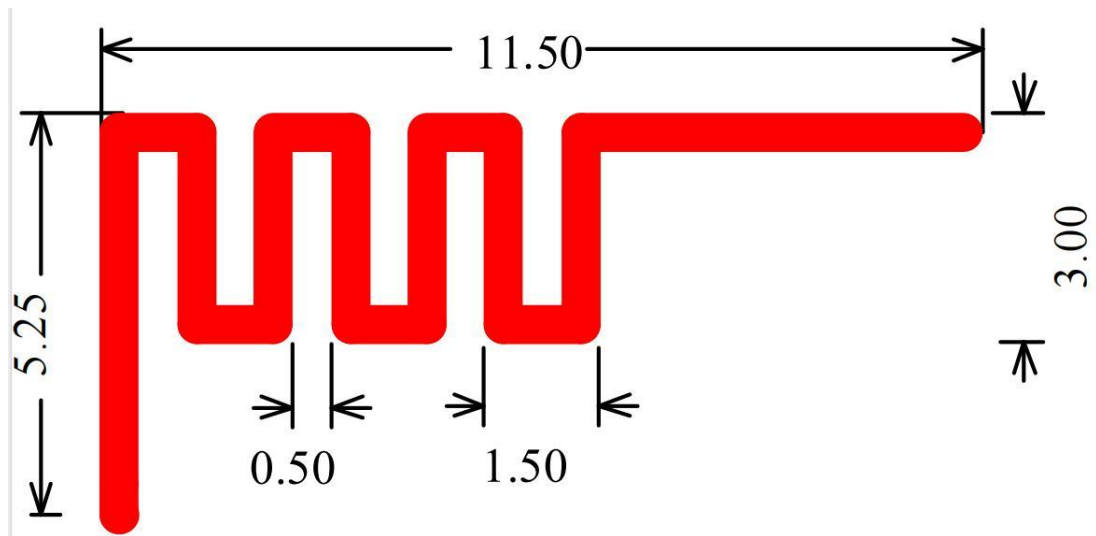

1. Test equipment list

name	Manufacturer	Model
Network analyzer	KEYSIGHT	E5071C
Network analyzer	KEYSIGHT	E5071C
Comprehensive Measuring Instrument	R&S	CWM500
OTA test system	GTS	RayZone-5000

2. Test setup

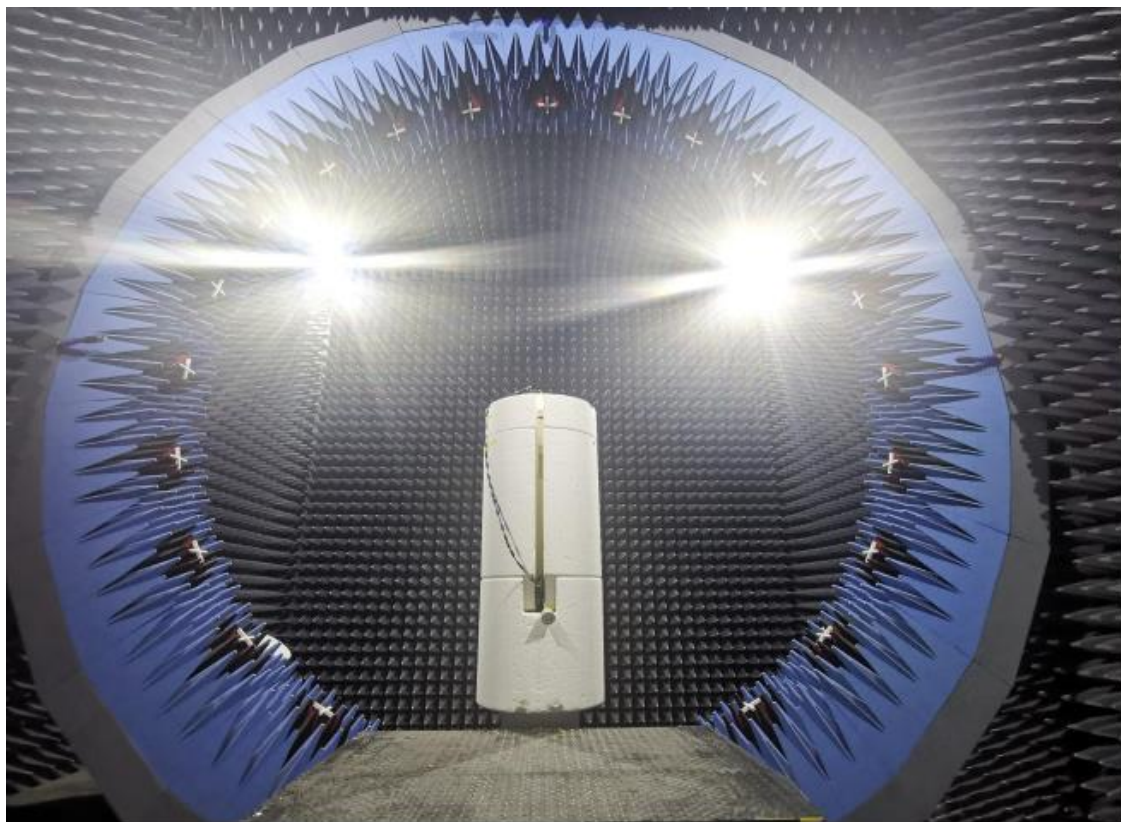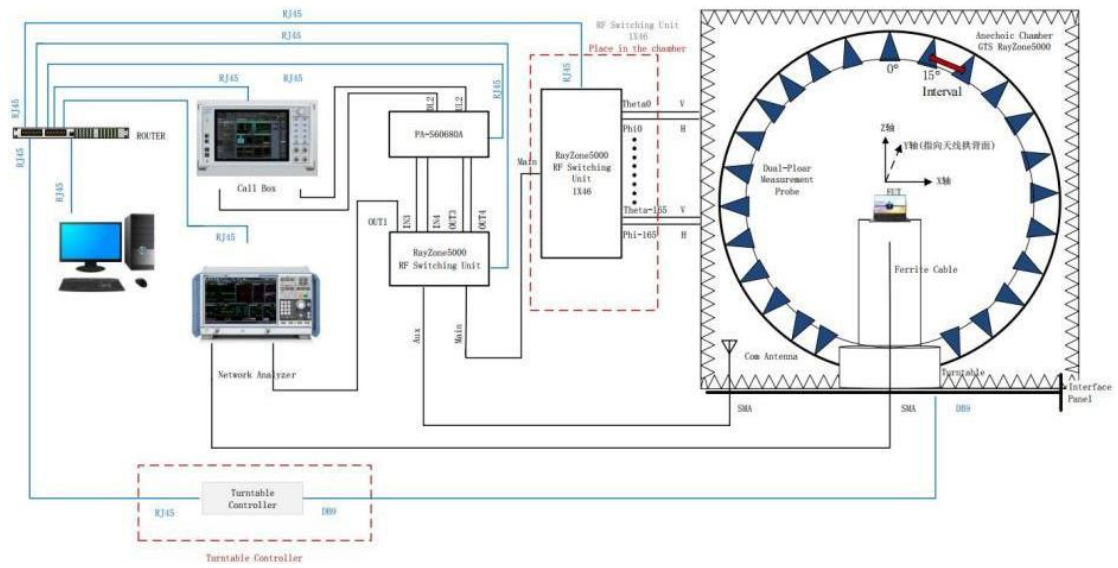


3. Performance parameter

Frequency range	2400-2500MHz
VSWR	≤ 7.0
Input impedance	50 Ω
Peak Gain(dBi)	1.59
Antenna type	PCB
Temperature	-40~80

4. VSWR Test Data


Frequency(MHz)	Return Loss	VSWR
2400	-8.69	2.35
2450	-11.70	3.16
2500	-10.68	3.16

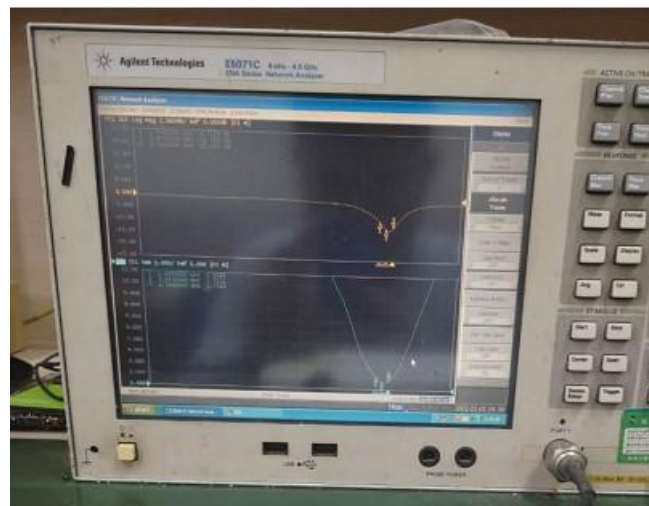


5. Gain and Effi

Frequency(MHz)	Effi	Peak Gain
2400	1.62	1.29
2410	1.35	0.93
2420	1.23	0.80
2430	1.46	0.68
2440	1.61	0.89
2450	1.40	1.29
2460	1.66	1.00
2470	1.59	0.86
2480	1.47	1.59
2490	1.38	0.90
2500	1.40	1.00


6. Test Directional diagram

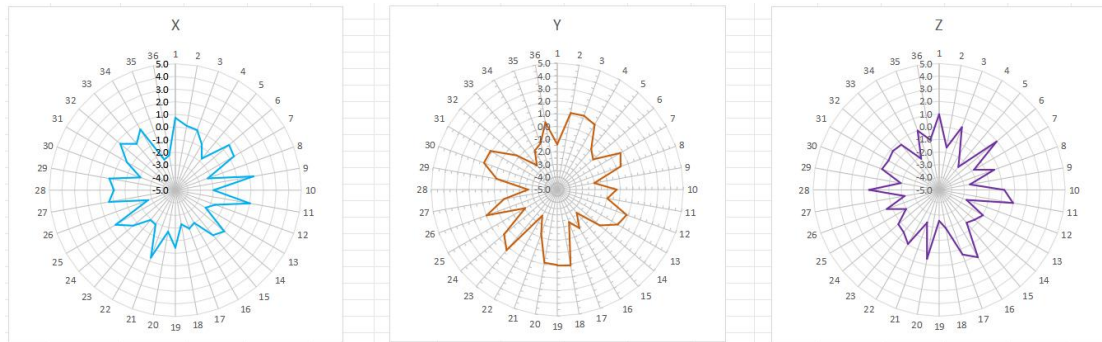

2400MHz

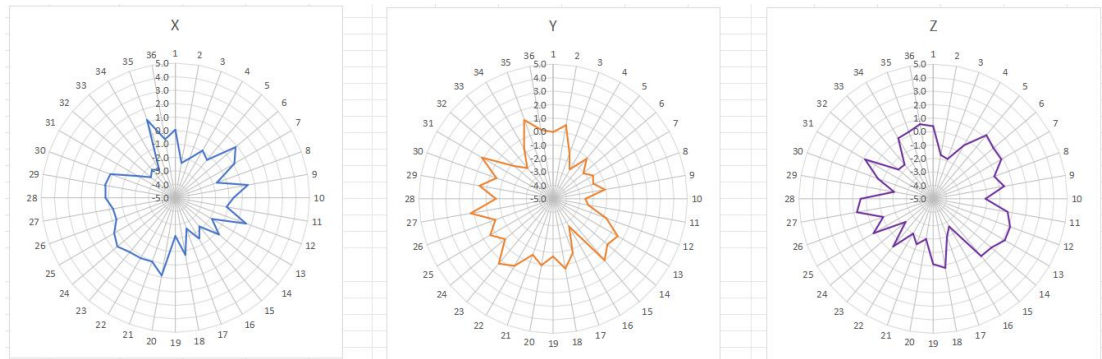

2440MHz

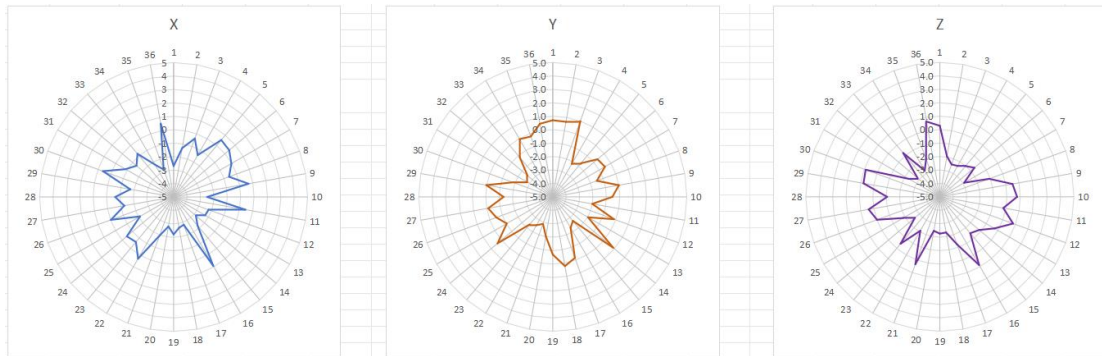

2500MHz

-----The end-----