

## Appendix C

### RF Test Data for 2.4GWIFI (Conducted Measurement)

Product Name: LED PROJECTOR

Test Model: L018AQ

#### Environmental Conditions


|                    |             |
|--------------------|-------------|
| Temperature:       | 23.6°C      |
| Relative Humidity: | 52.7%       |
| ATM Pressure:      | 100.0 kPa   |
| Test Engineer:     | Suichao Lai |
| Supervised by:     | Yan Chen    |

## C.1 -6dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | b    | 2412            | Ant1    | 8.097                 | $\geq 0.5$                  | Pass    |
| NVNT      | b    | 2437            | Ant1    | 8.583                 | $\geq 0.5$                  | Pass    |
| NVNT      | b    | 2462            | Ant1    | 8.116                 | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2412            | Ant1    | 16.341                | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2437            | Ant1    | 16.346                | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2462            | Ant1    | 16.319                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 17.126                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2437            | Ant1    | 16.858                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 17.167                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 2422            | Ant1    | 35.601                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 2437            | Ant1    | 35.374                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 2452            | Ant1    | 35.456                | $\geq 0.5$                  | Pass    |

## Test Graphs


-6dB Bandwidth NVNT b 2412MHz Ant1

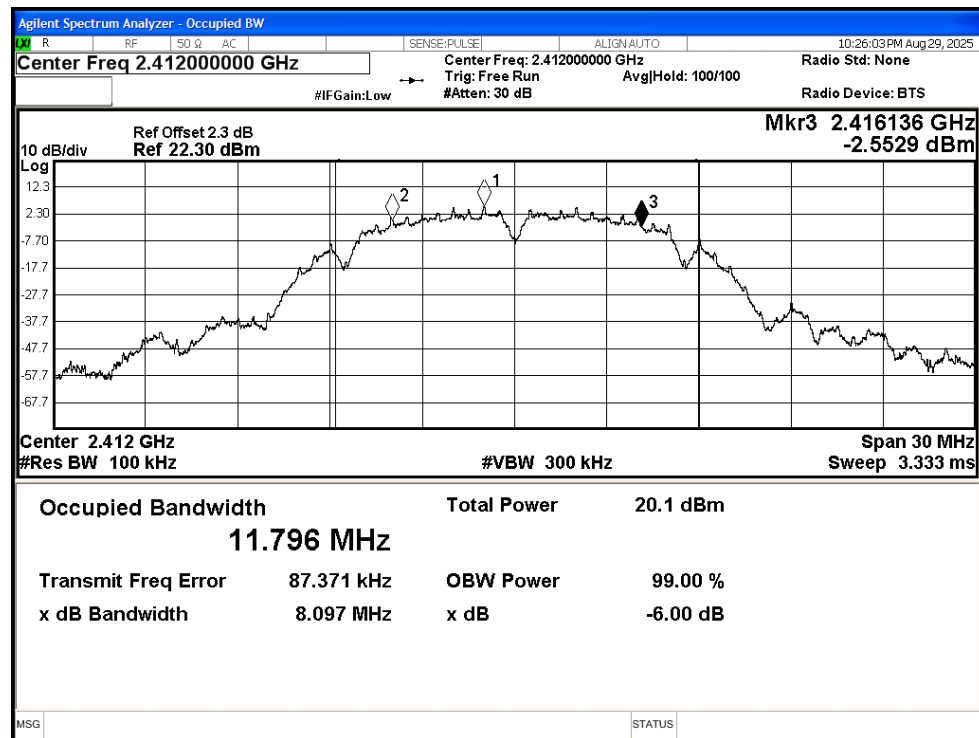


-6dB Bandwidth NVNT b 2437MHz Ant1

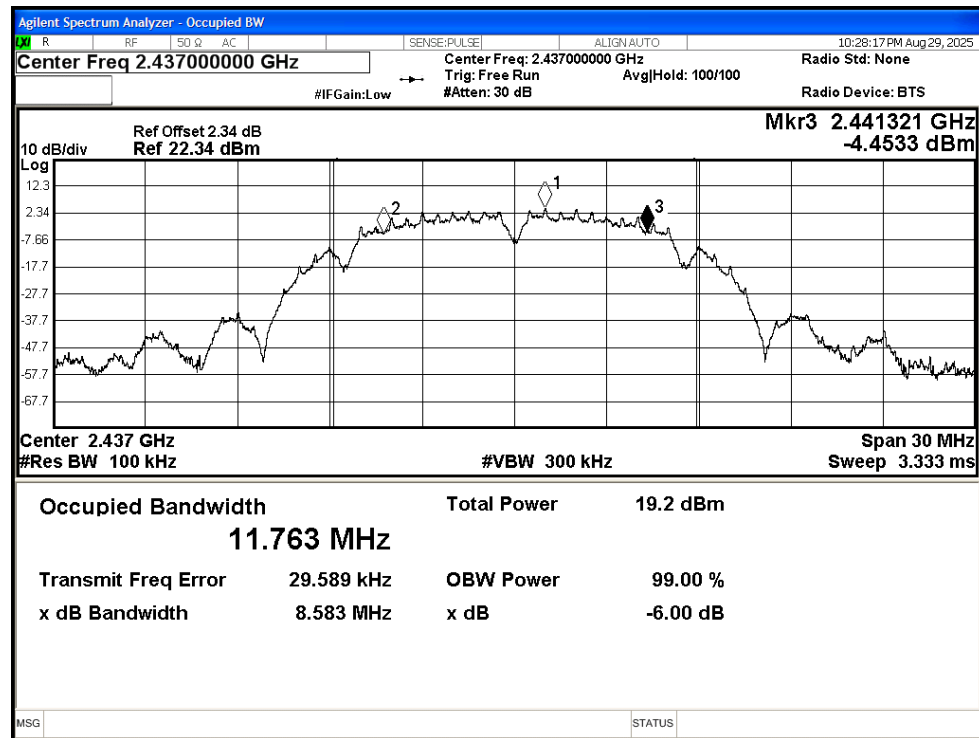


## -6dB Bandwidth NVNT b 2462MHz Ant1

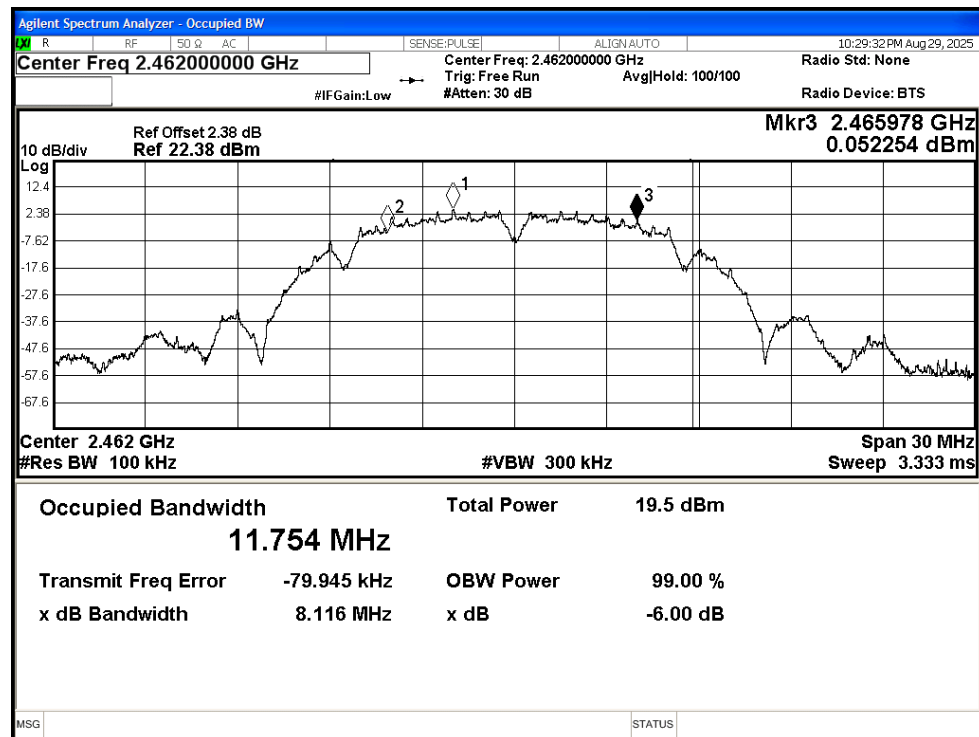


## -6dB Bandwidth NVNT g 2412MHz Ant1

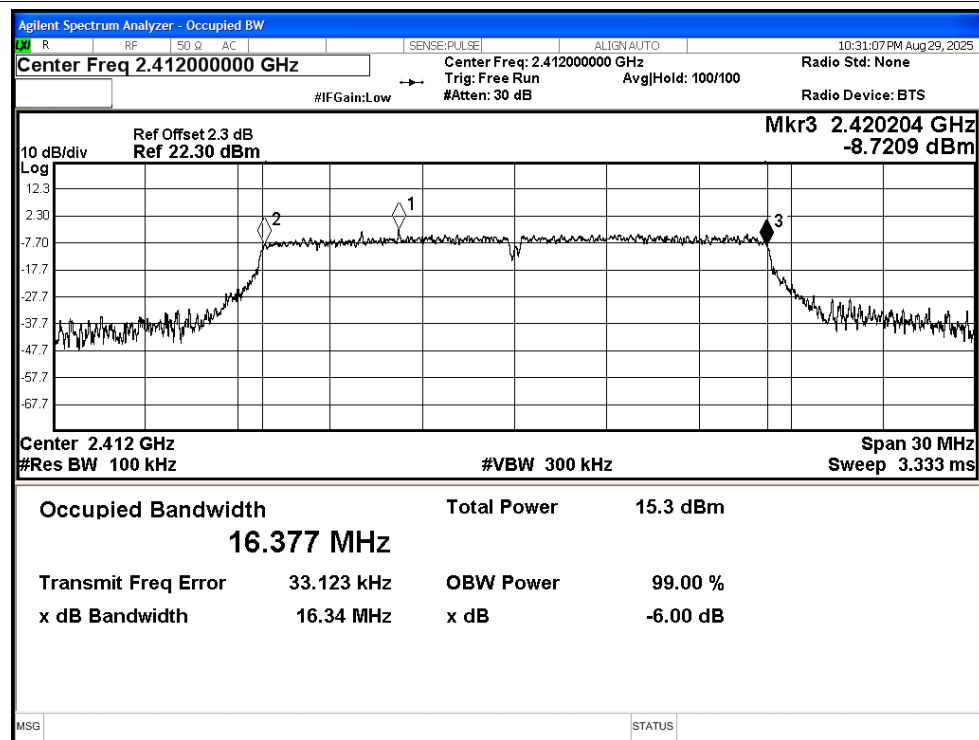


## -6dB Bandwidth NVNT g 2437MHz Ant1

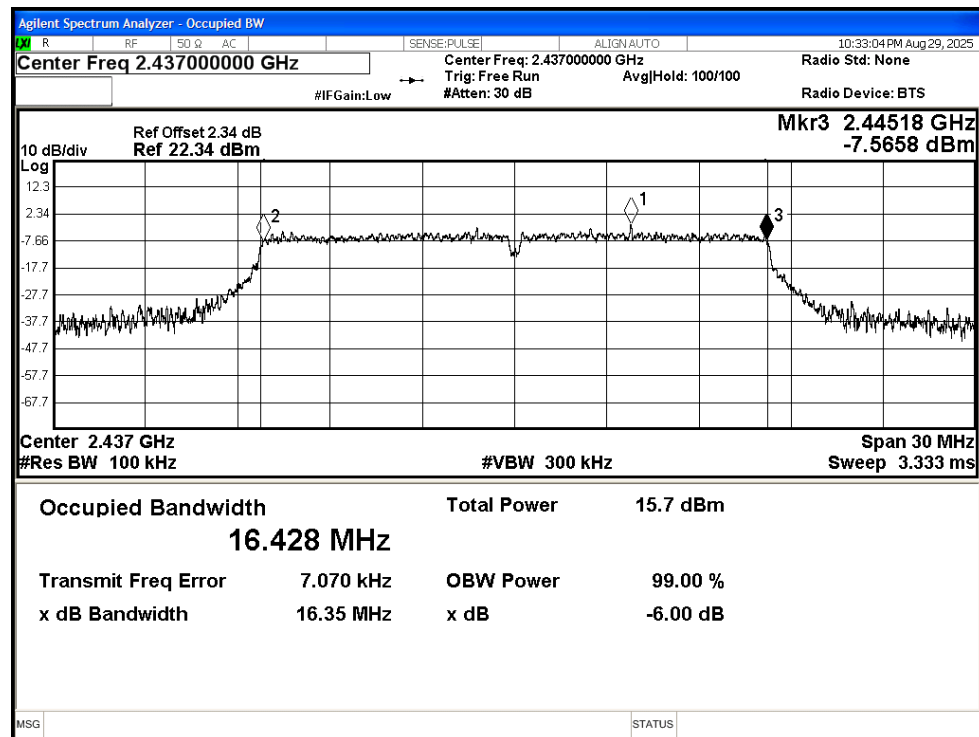


## -6dB Bandwidth NVNT g 2462MHz Ant1

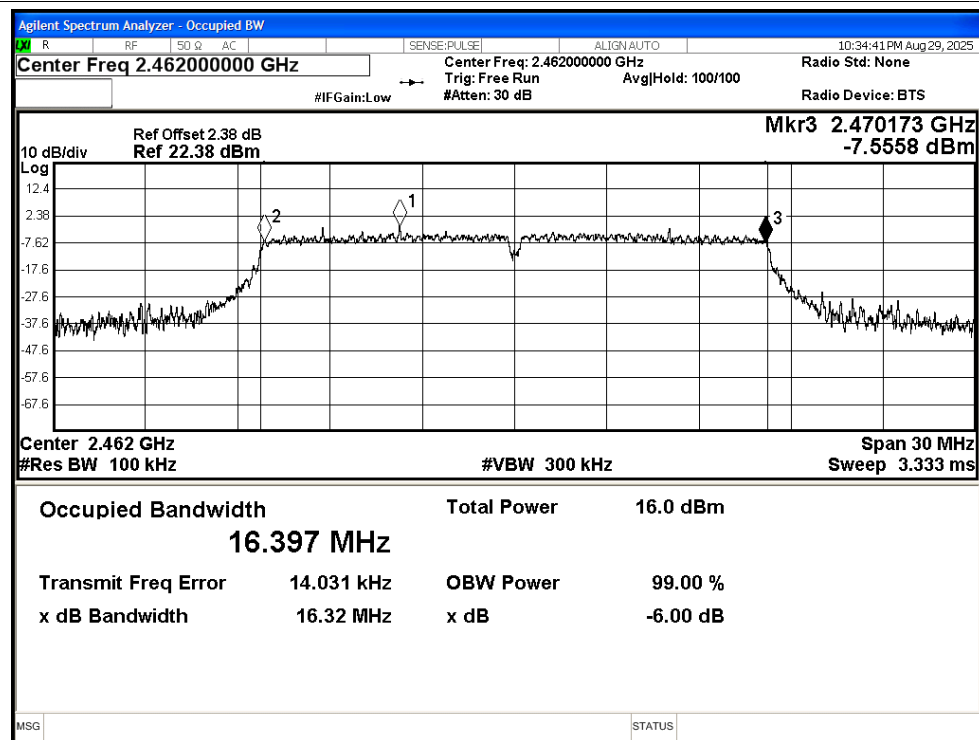


## -6dB Bandwidth NVNT n20 2412MHz Ant1

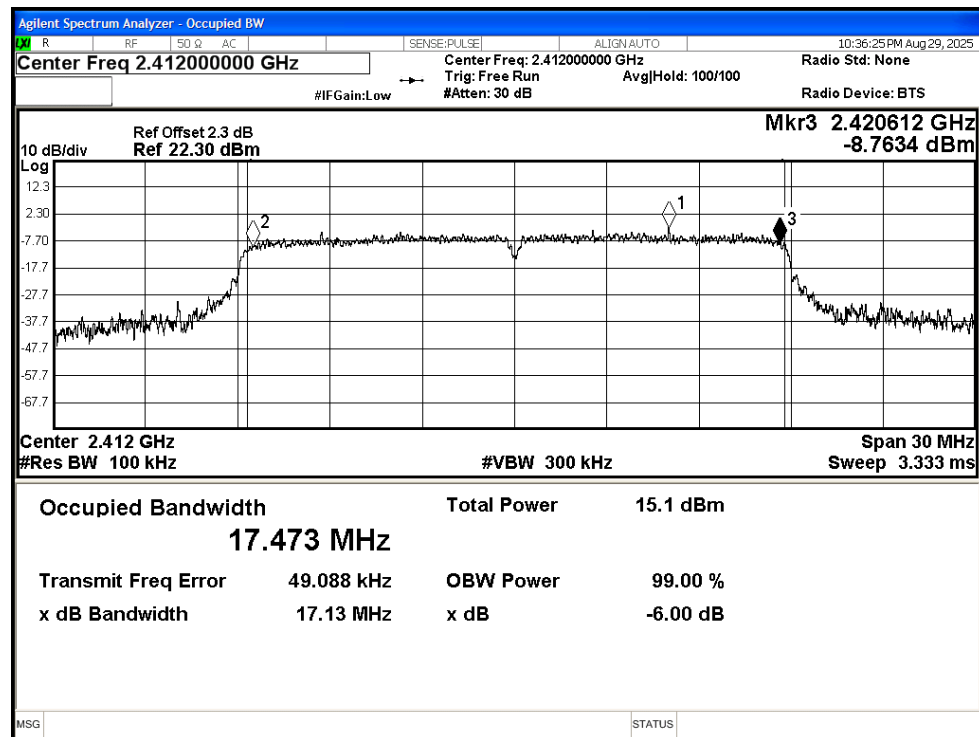


## -6dB Bandwidth NVNT n20 2437MHz Ant1

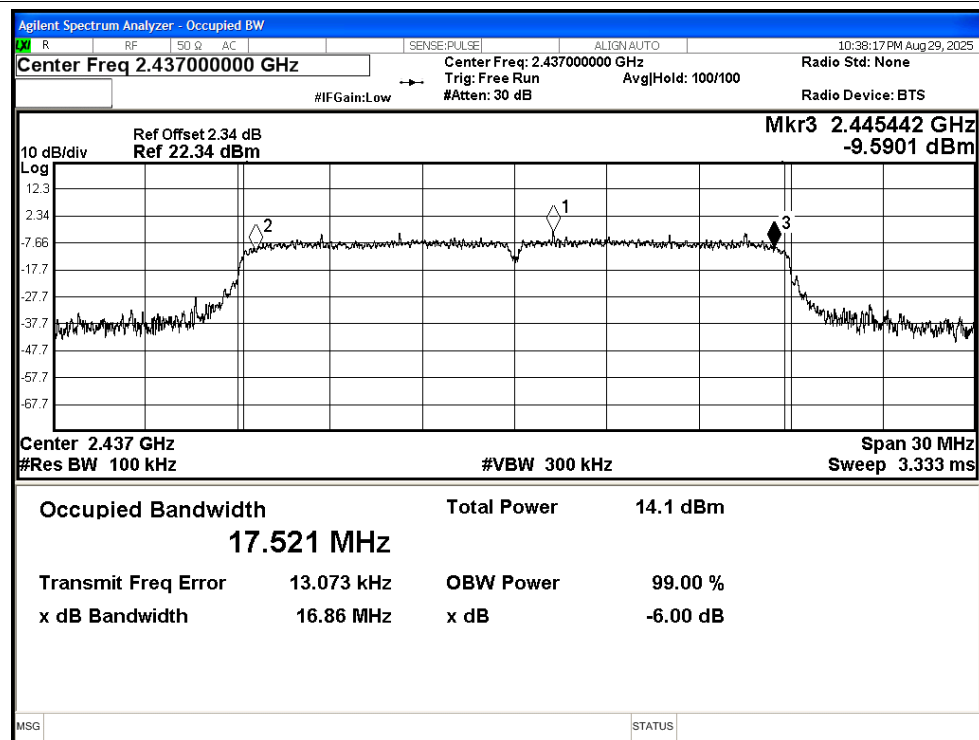


## -6dB Bandwidth NVNT n20 2462MHz Ant1

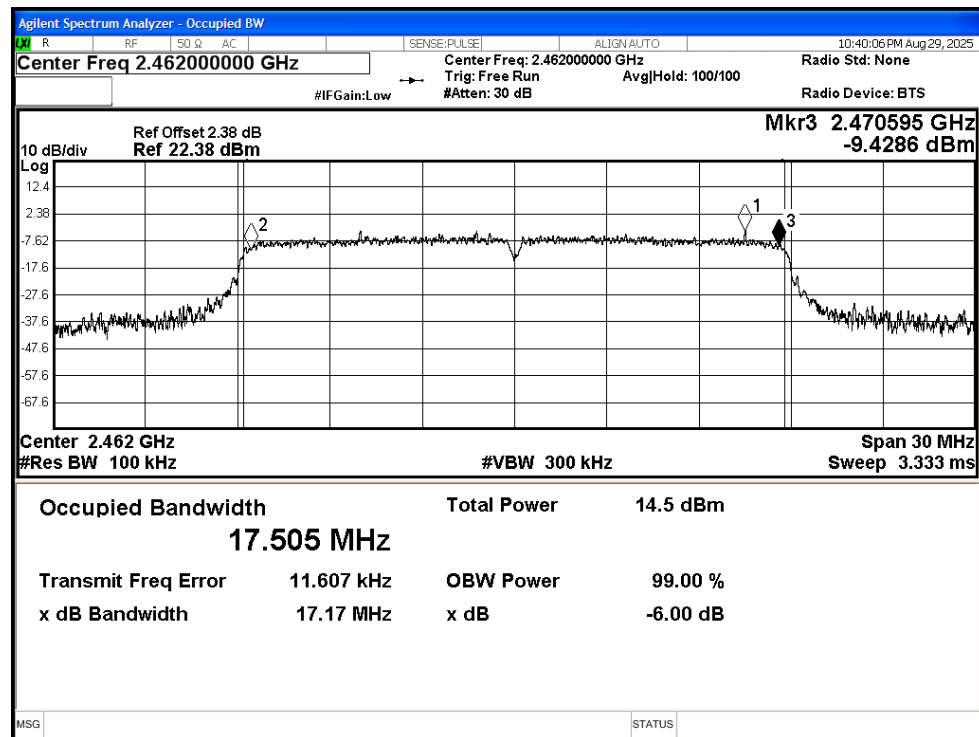


## -6dB Bandwidth NVNT n40 2422MHz Ant1

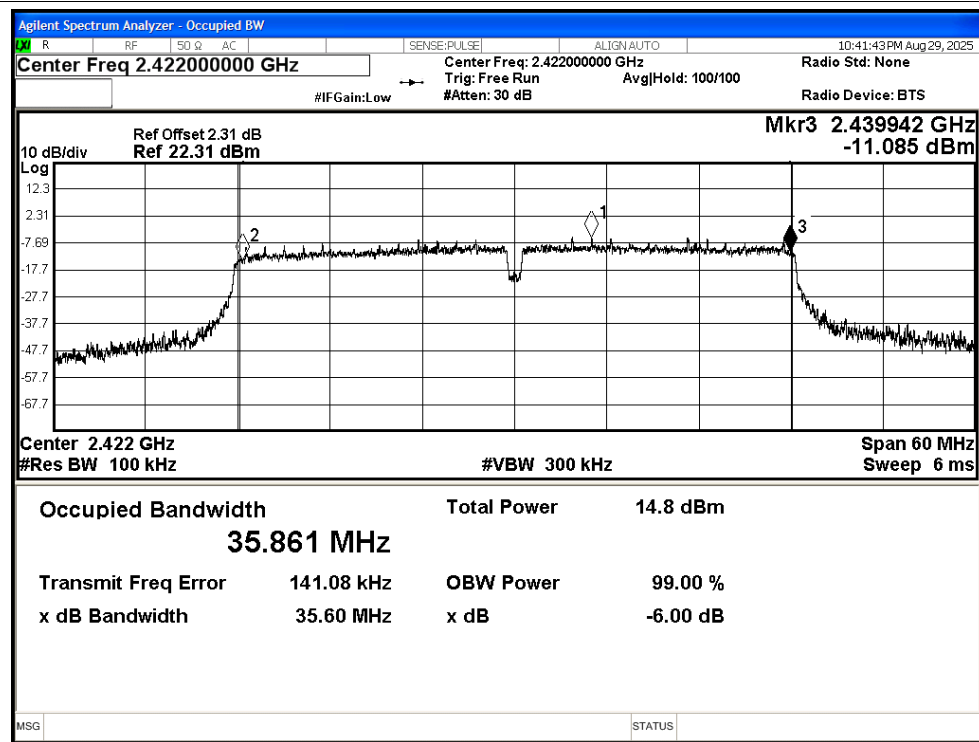

## -6dB Bandwidth NVNT n40 2437MHz Ant1

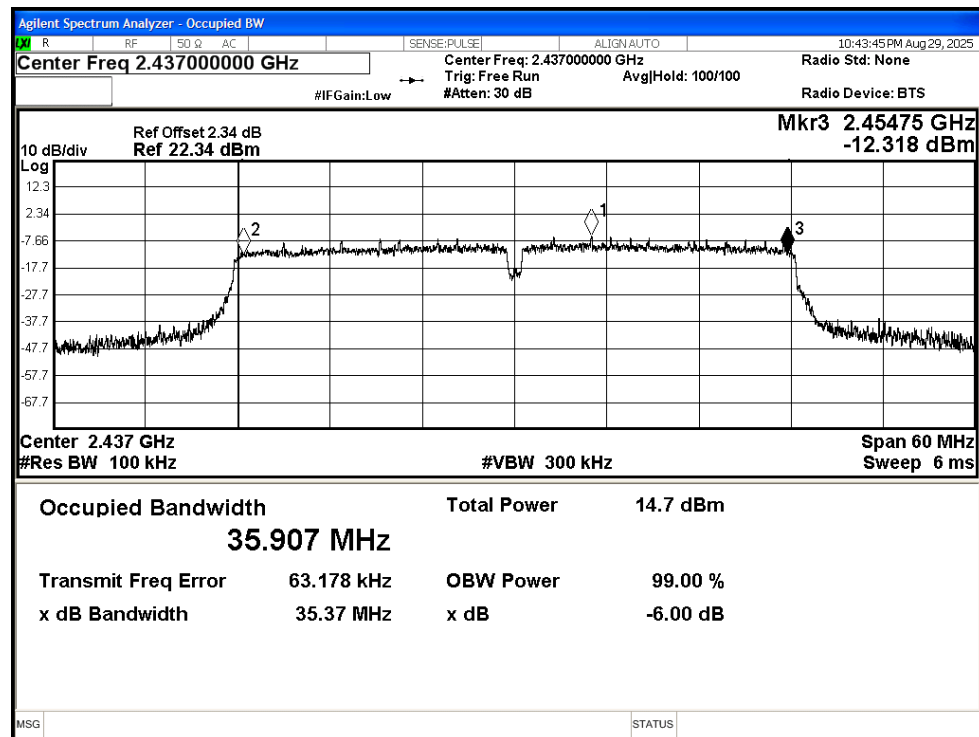

## -6dB Bandwidth NVNT n40 2452MHz Ant1

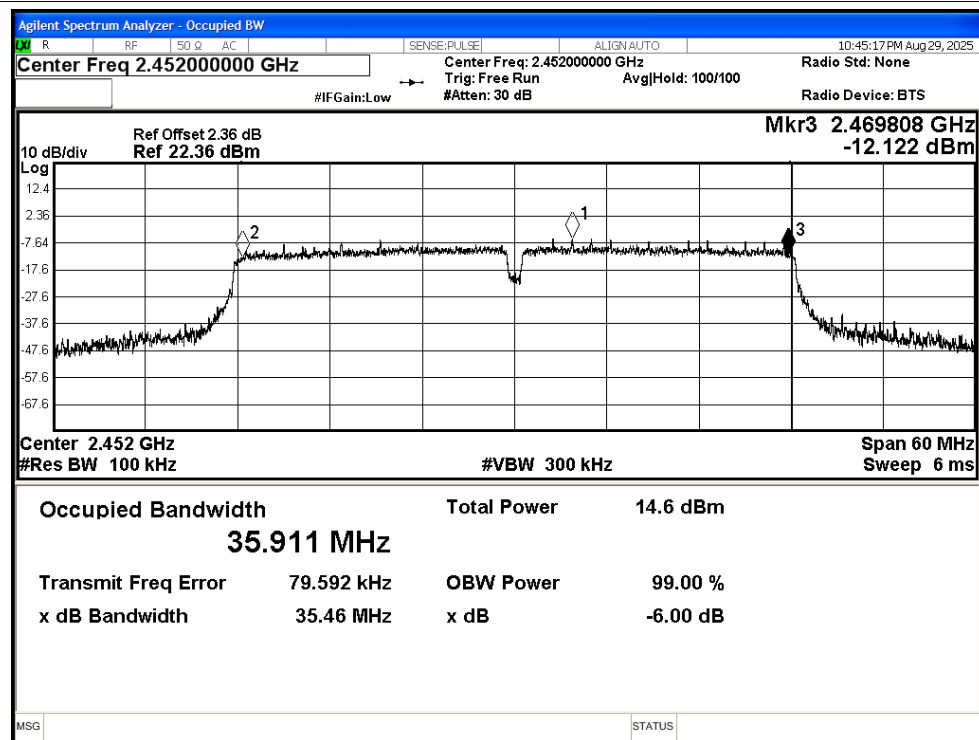



## C.2 Maximum Peak Conducted Output Power


| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | 15.09                 | 30          | Pass    |
| NVNT      | b    | 2437            | Ant1    | 14.18                 | 30          | Pass    |
| NVNT      | b    | 2462            | Ant1    | 14.49                 | 30          | Pass    |
| NVNT      | g    | 2412            | Ant1    | 14.22                 | 30          | Pass    |
| NVNT      | g    | 2437            | Ant1    | 14.53                 | 30          | Pass    |
| NVNT      | g    | 2462            | Ant1    | 14.9                  | 30          | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 13.69                 | 30          | Pass    |
| NVNT      | n20  | 2437            | Ant1    | 13.75                 | 30          | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 13.12                 | 30          | Pass    |
| NVNT      | n40  | 2422            | Ant1    | 13.27                 | 30          | Pass    |
| NVNT      | n40  | 2437            | Ant1    | 13.07                 | 30          | Pass    |
| NVNT      | n40  | 2452            | Ant1    | 12.98                 | 30          | Pass    |

### C.3 Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|-----------|------|-----------------|---------|--------------------------|------------------|---------|
| NVNT      | b    | 2412            | Ant1    | -5.98                    | 8                | Pass    |
| NVNT      | b    | 2437            | Ant1    | -9.95                    | 8                | Pass    |
| NVNT      | b    | 2462            | Ant1    | -10.53                   | 8                | Pass    |
| NVNT      | g    | 2412            | Ant1    | -16.06                   | 8                | Pass    |
| NVNT      | g    | 2437            | Ant1    | -16.34                   | 8                | Pass    |
| NVNT      | g    | 2462            | Ant1    | -15.56                   | 8                | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -17.44                   | 8                | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -17.56                   | 8                | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -16.96                   | 8                | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -20.05                   | 8                | Pass    |
| NVNT      | n40  | 2437            | Ant1    | -20.41                   | 8                | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -20.14                   | 8                | Pass    |



## Test Graphs

## PSD NVNT b 2412MHz Ant1

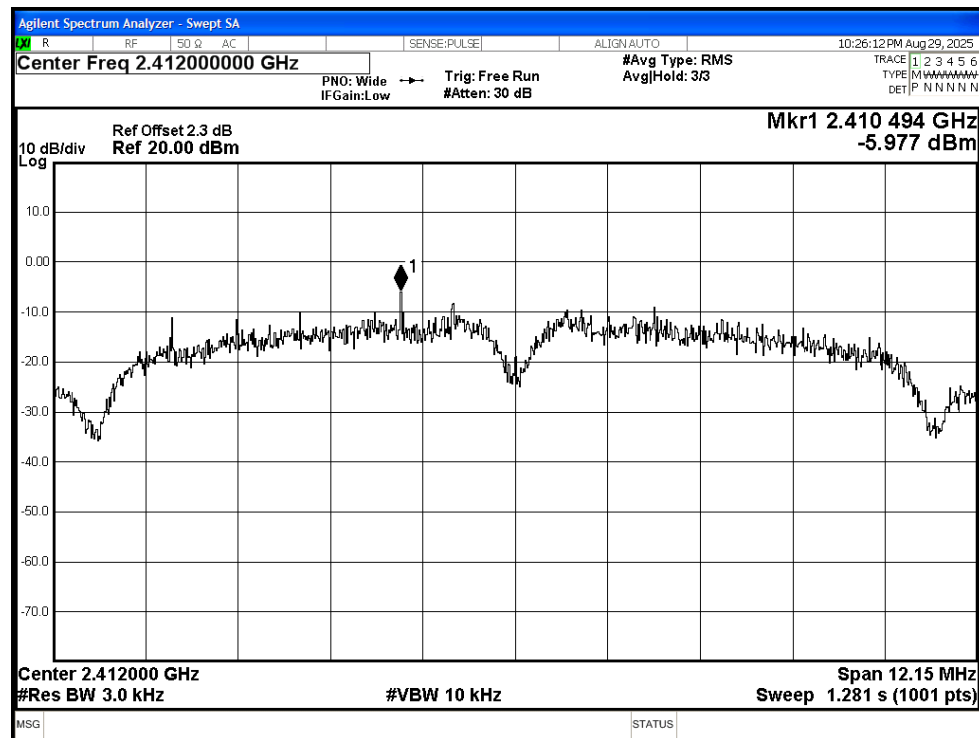


## PSD NVNT b 2437MHz Ant1

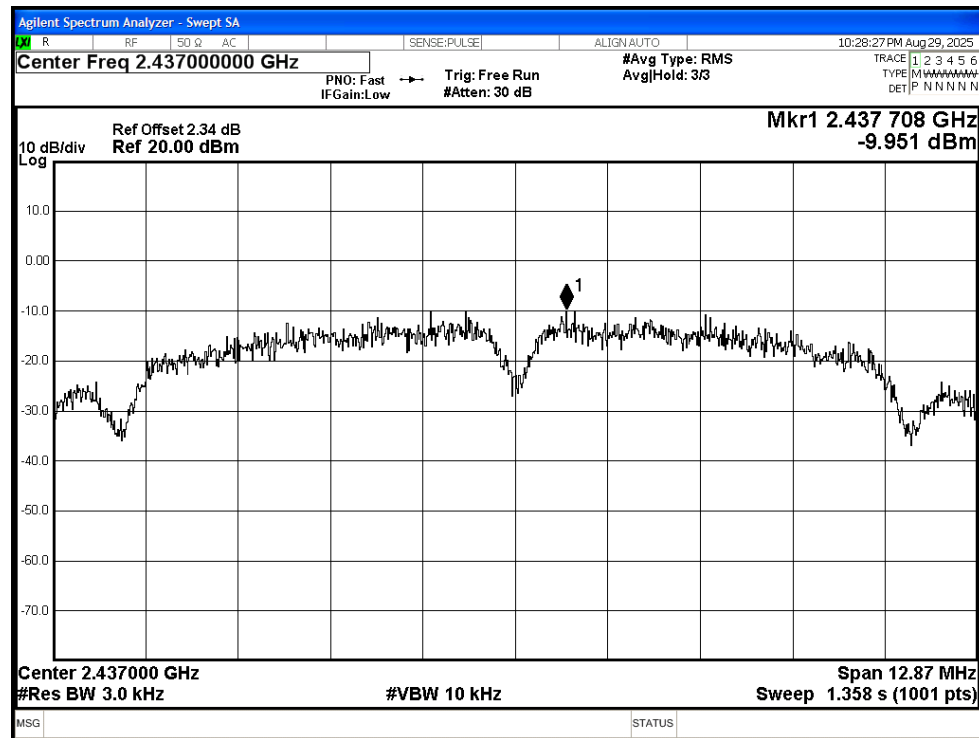


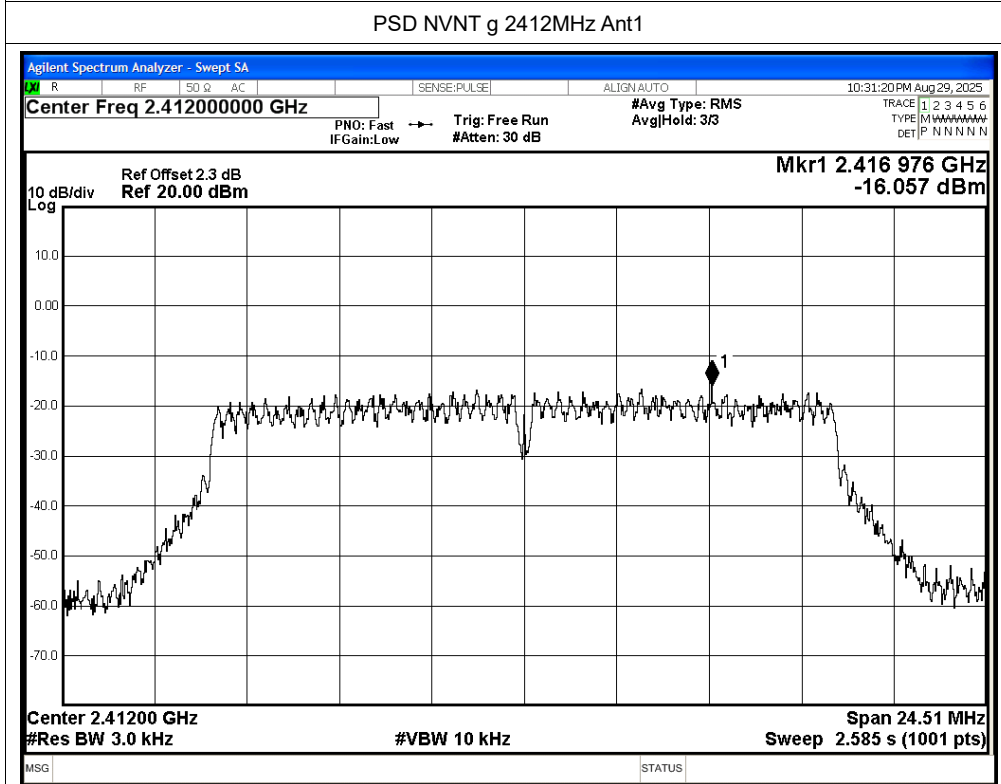
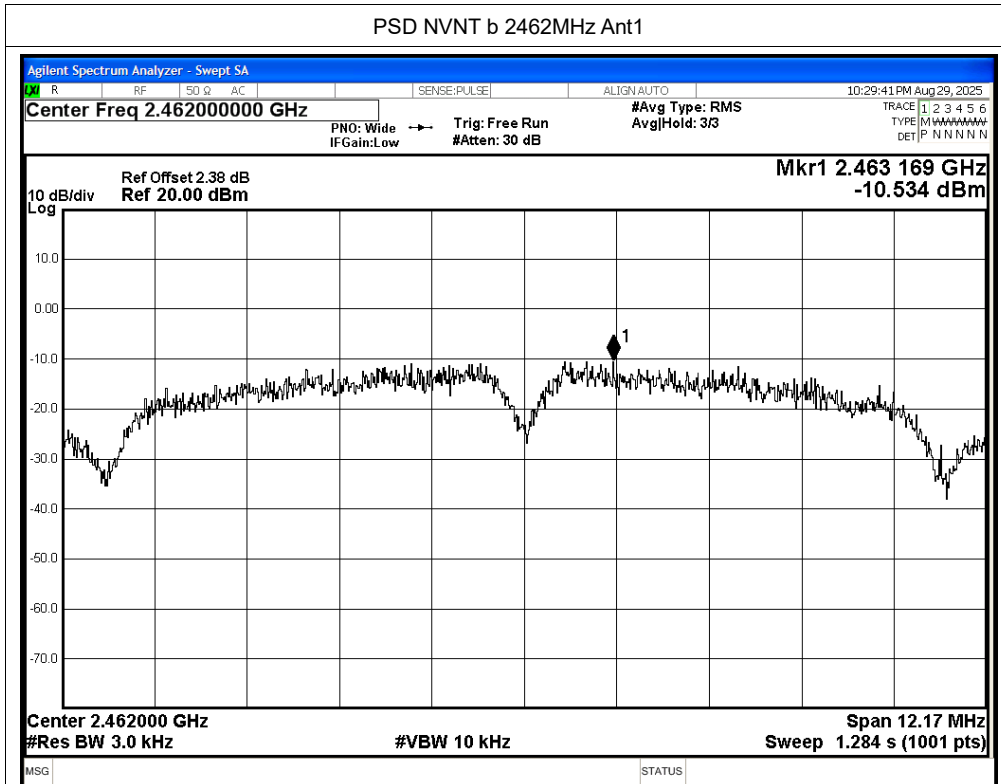




PSD NVNT g 2437MHz Ant1

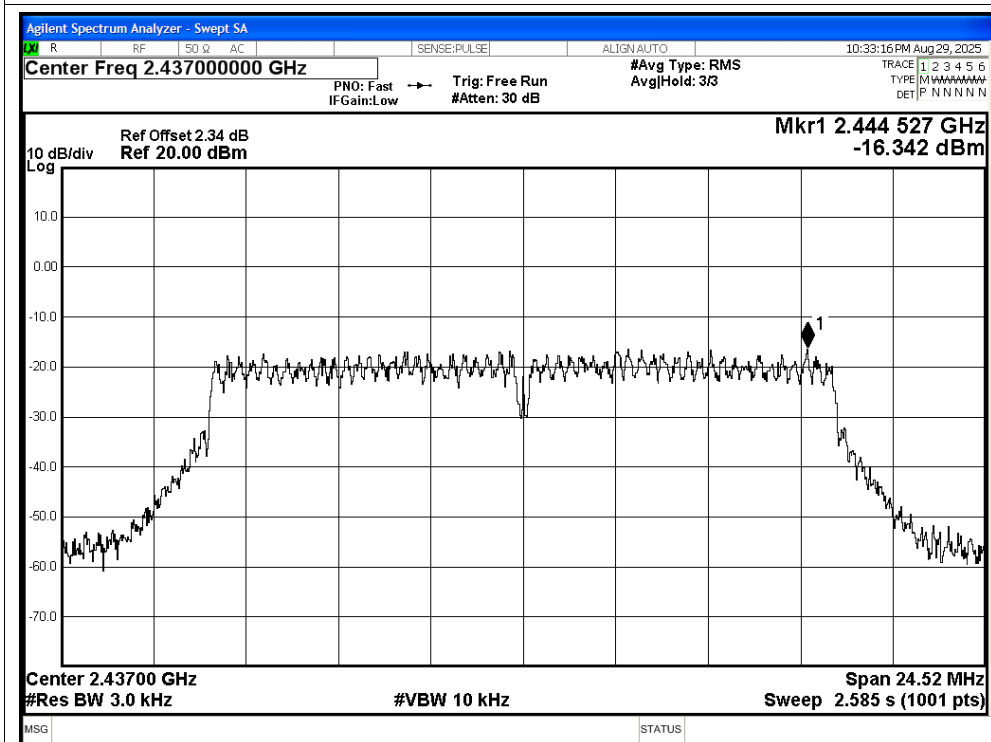


PSD NVNT g 2462MHz Ant1

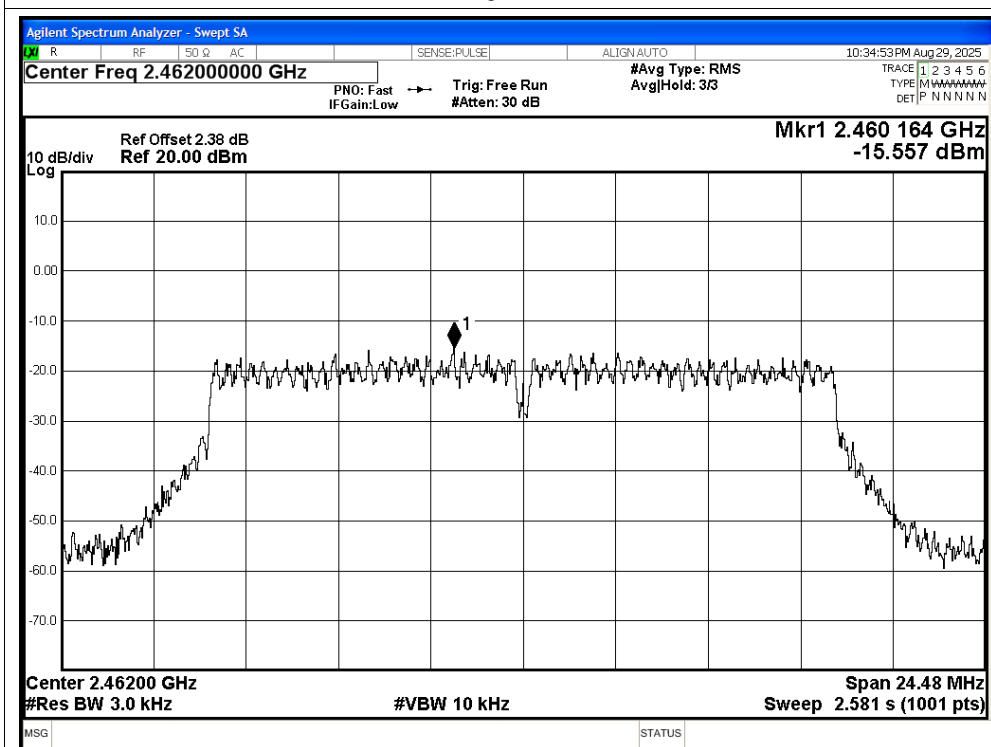

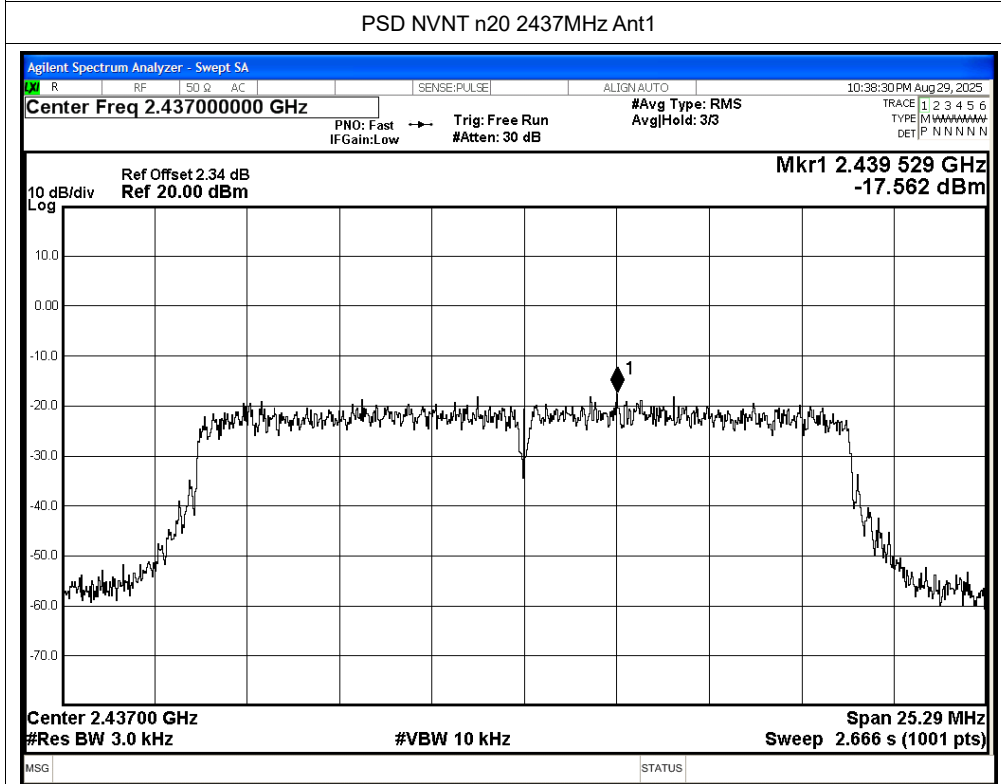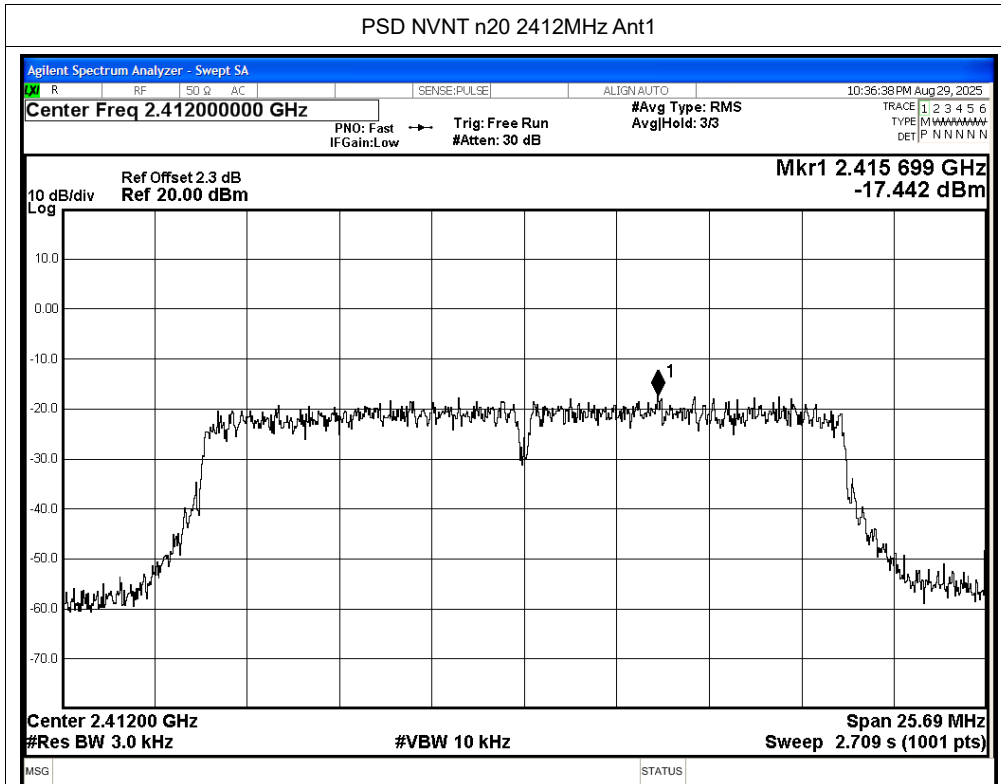

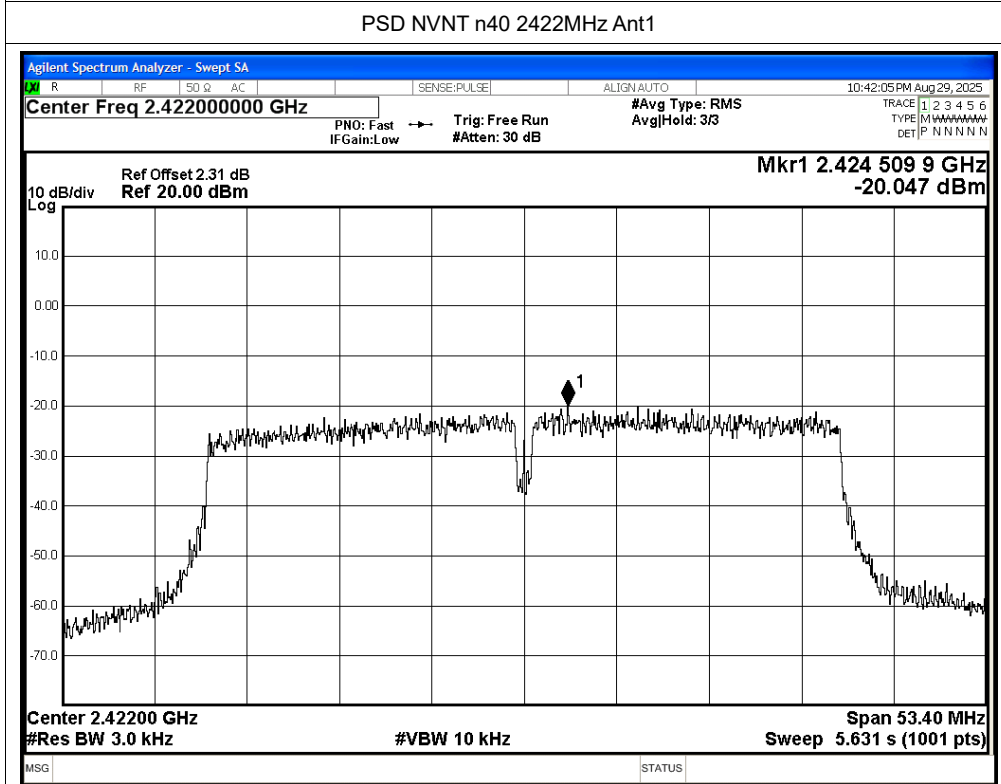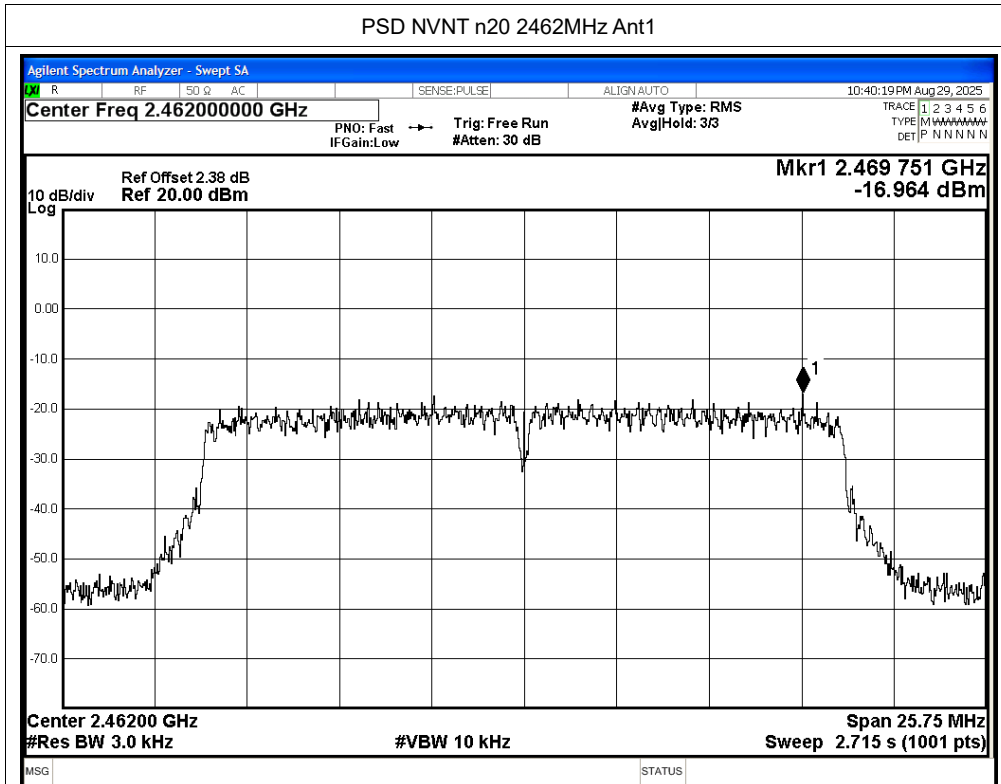

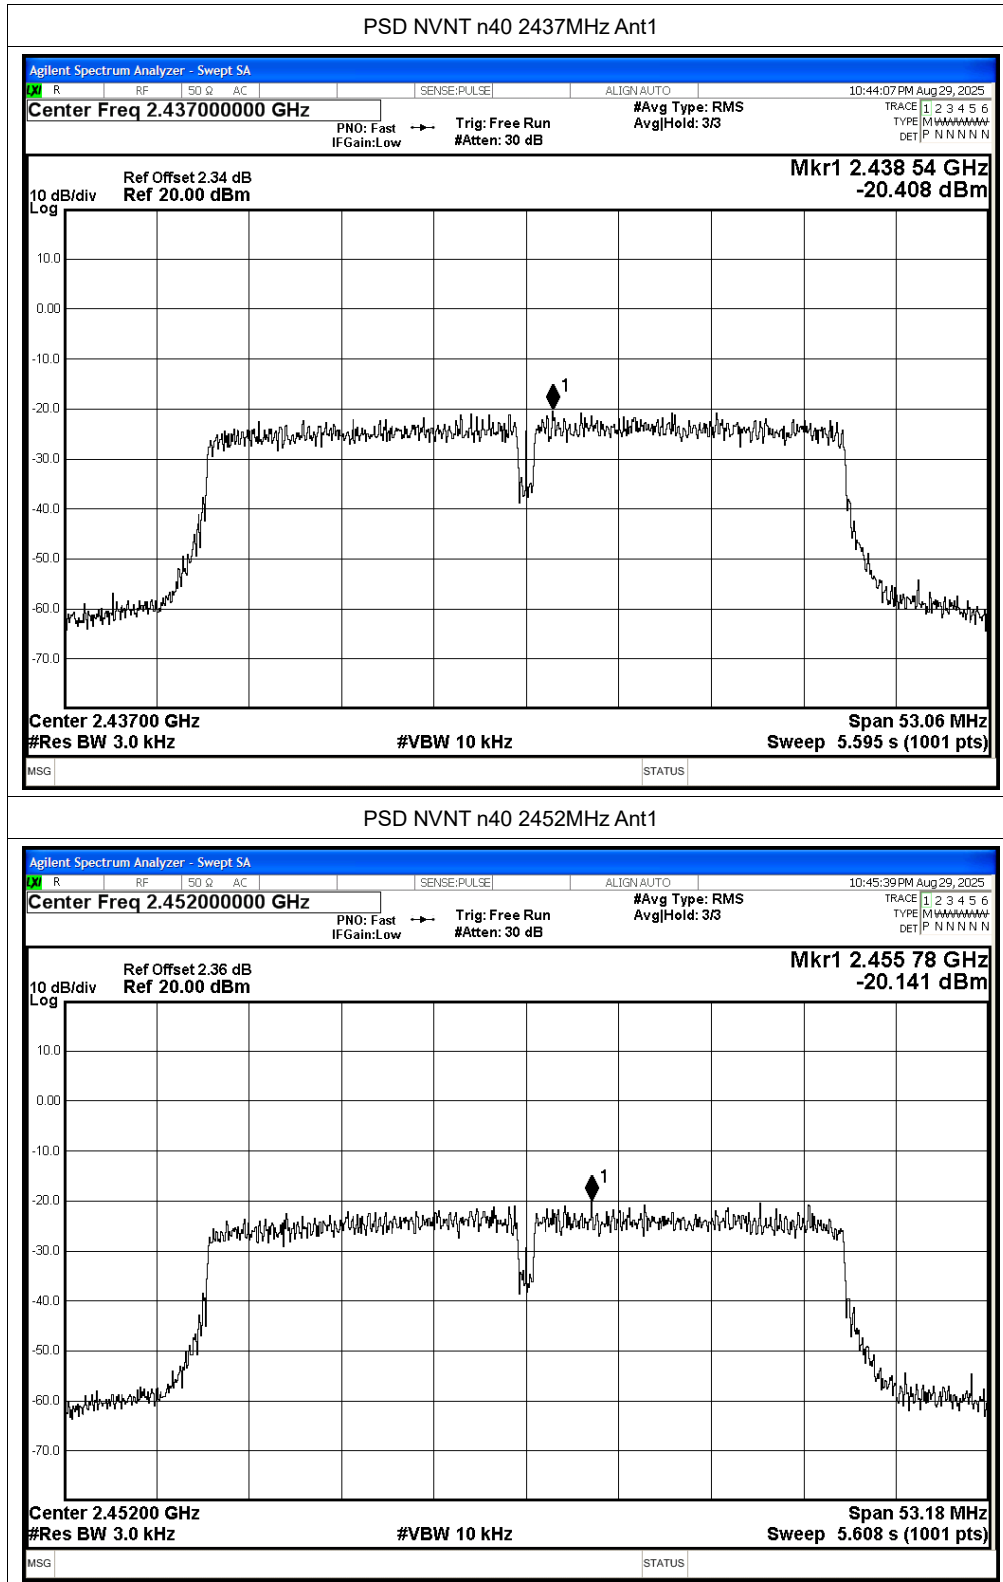




## C.4 Band Edge


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -46.41          | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -58.76          | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -32.39          | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -41.74          | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -30.54          | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -42.72          | -20         | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -34.97          | -20         | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -38.47          | -20         | Pass    |

## Test Graphs


## Band Edge NVNT b 2412MHz Ant1 Ref

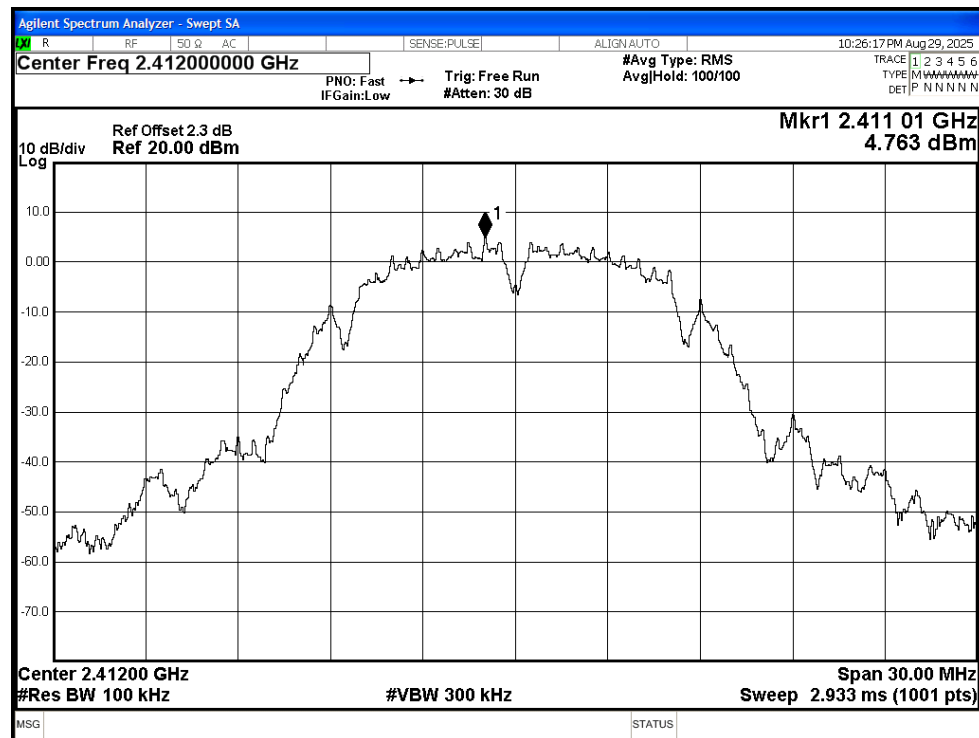


## Band Edge NVNT b 2412MHz Ant1 Emission

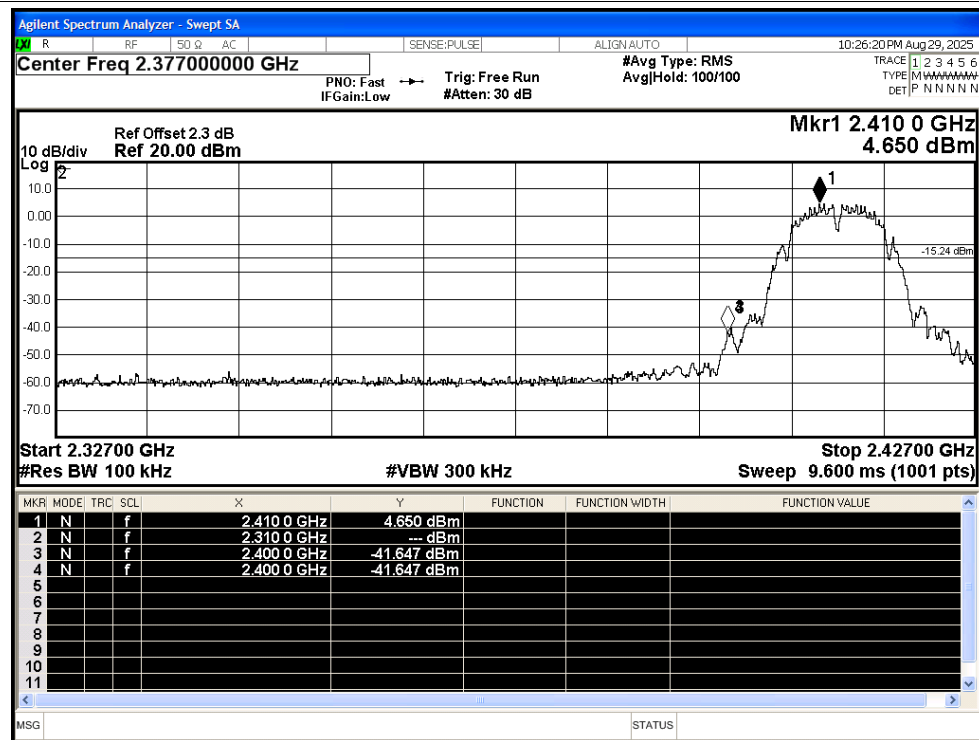


## Band Edge NVNT b 2462MHz Ant1 Ref

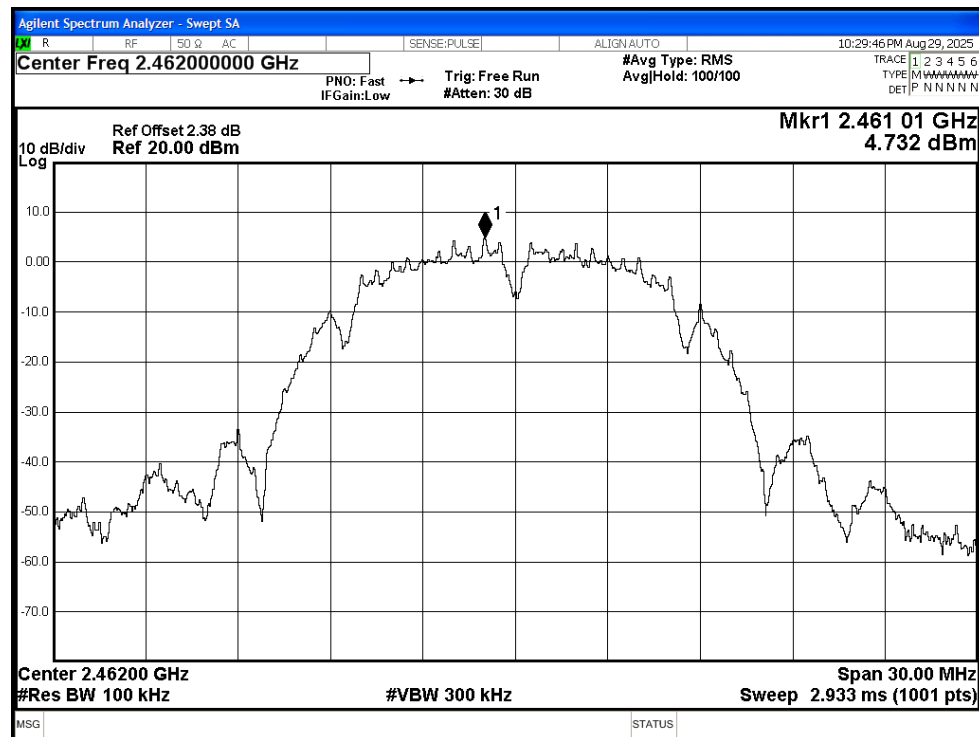


## Band Edge NVNT b 2462MHz Ant1 Emission

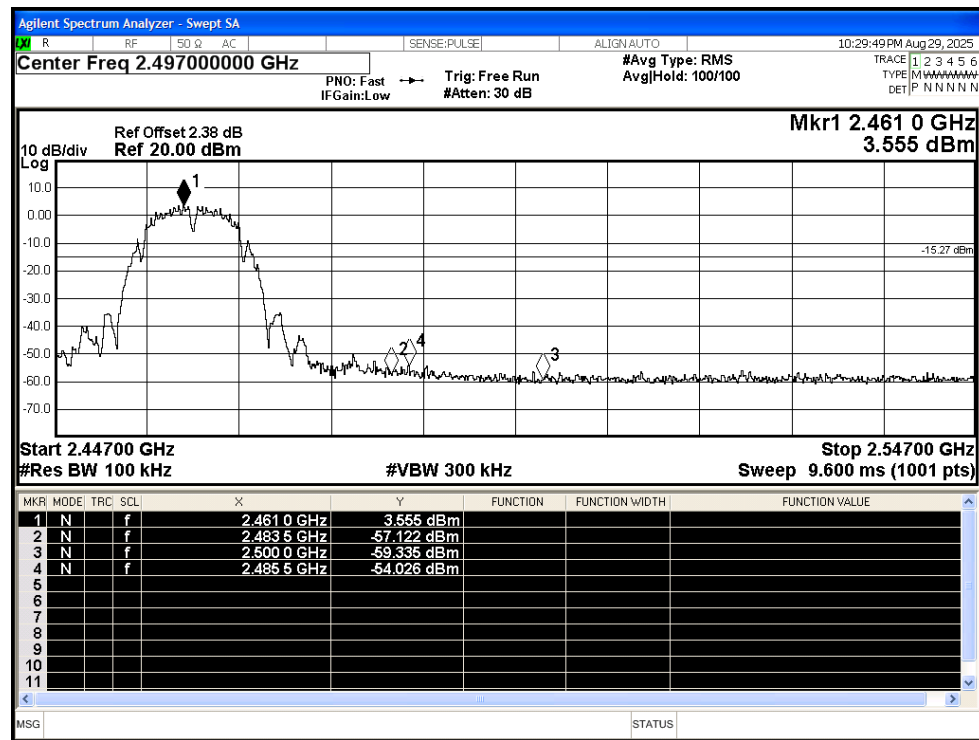


## Band Edge NVNT g 2412MHz Ant1 Ref

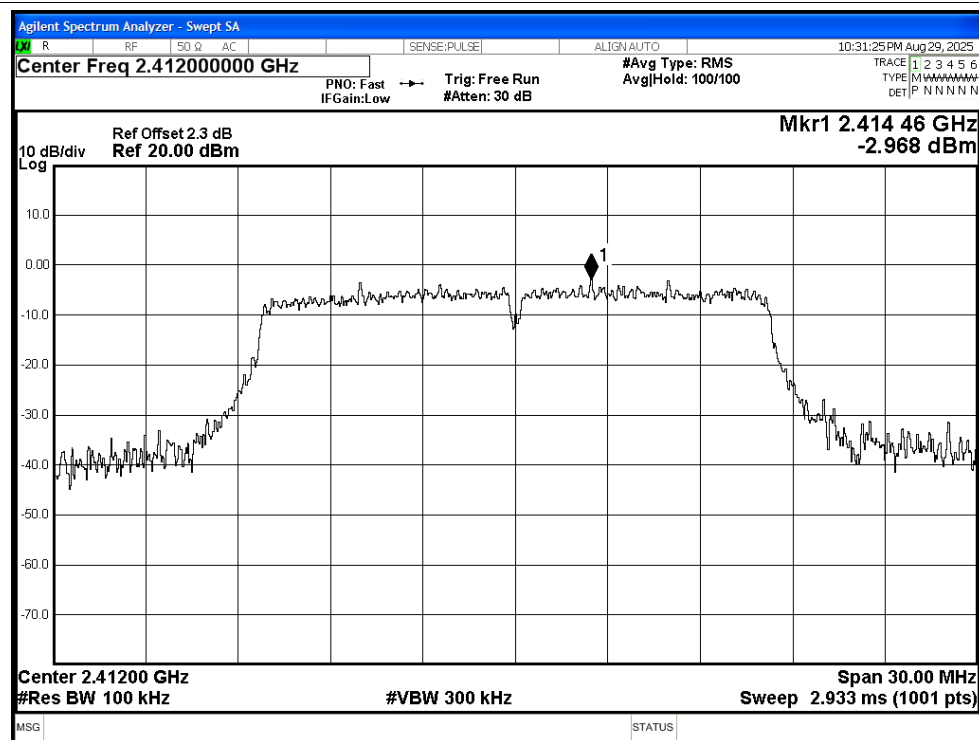


## Band Edge NVNT g 2412MHz Ant1 Emission


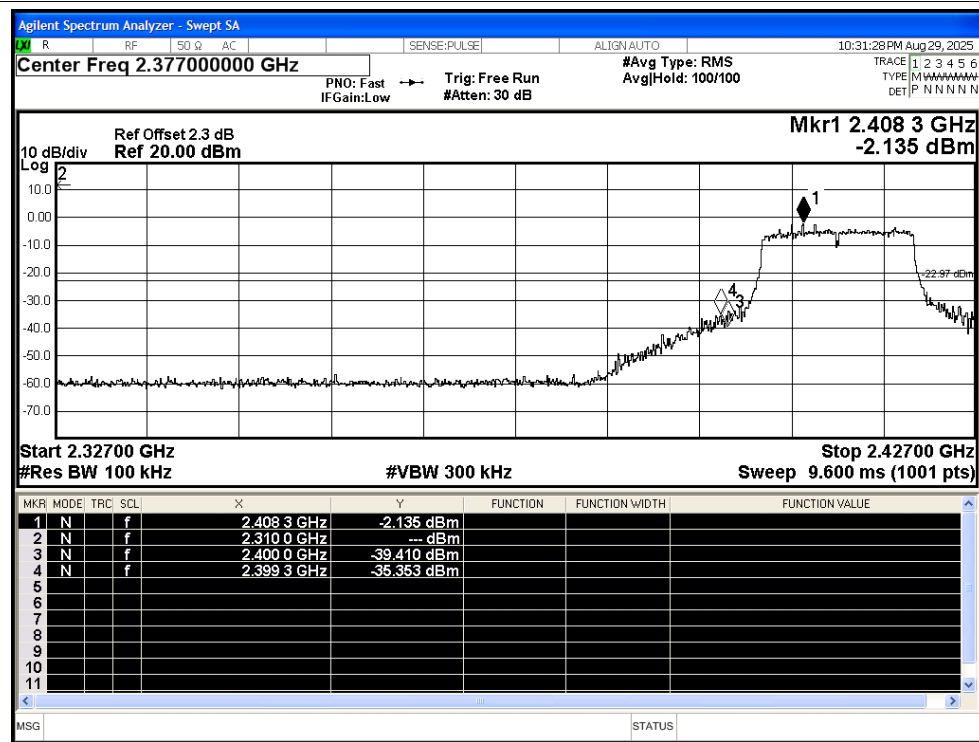


## Band Edge NVNT g 2462MHz Ant1 Ref

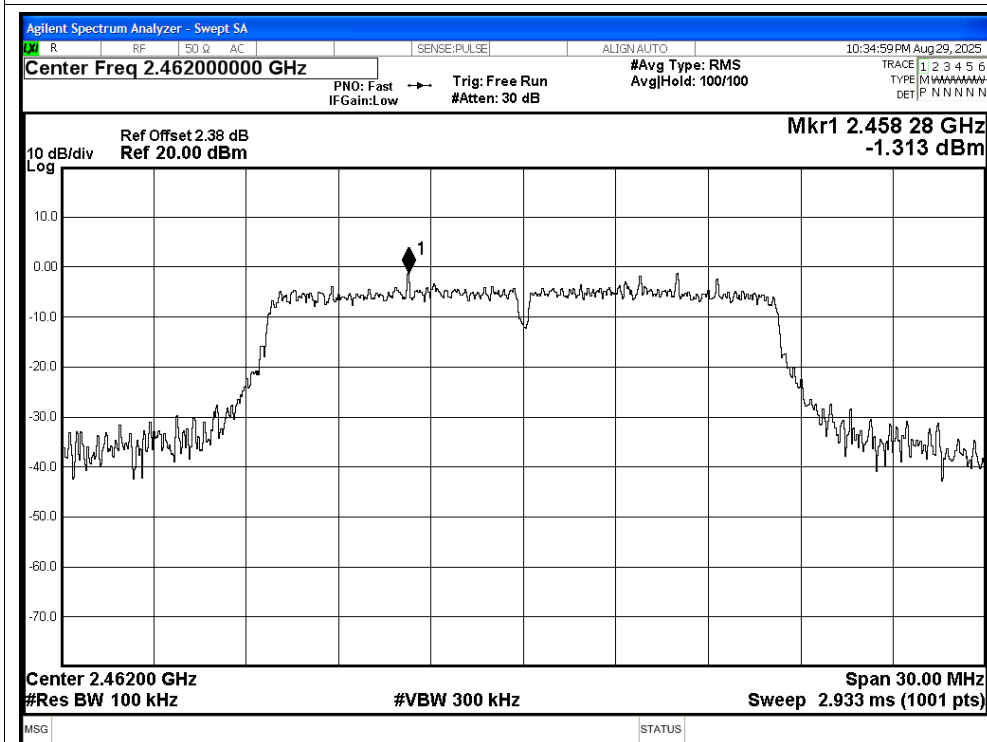


## Band Edge NVNT g 2462MHz Ant1 Emission

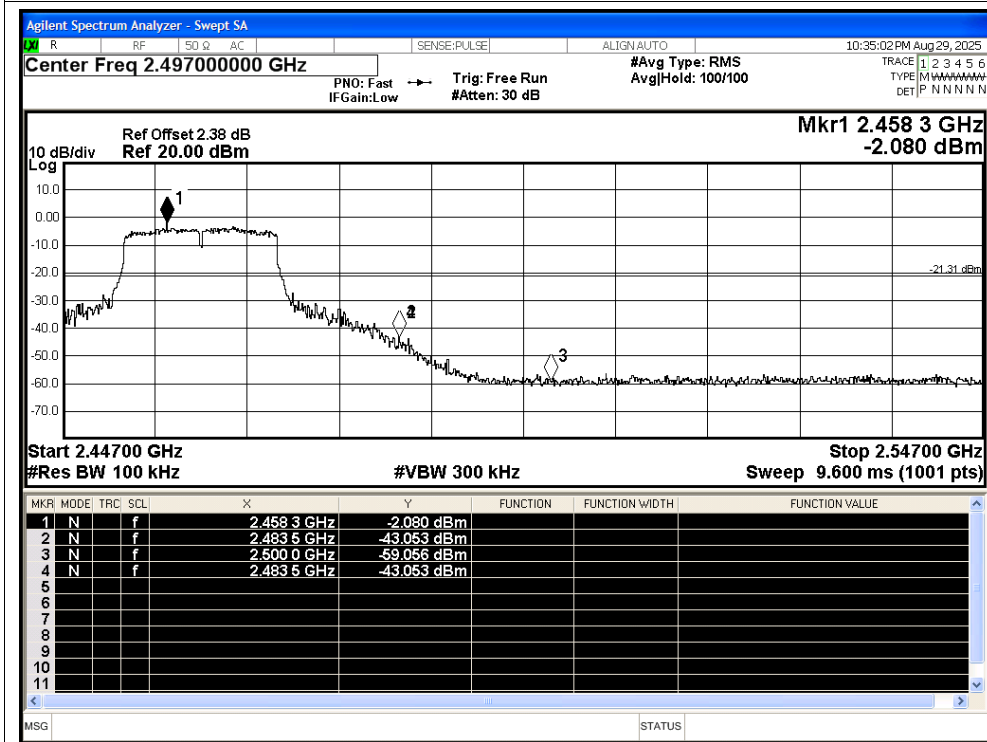


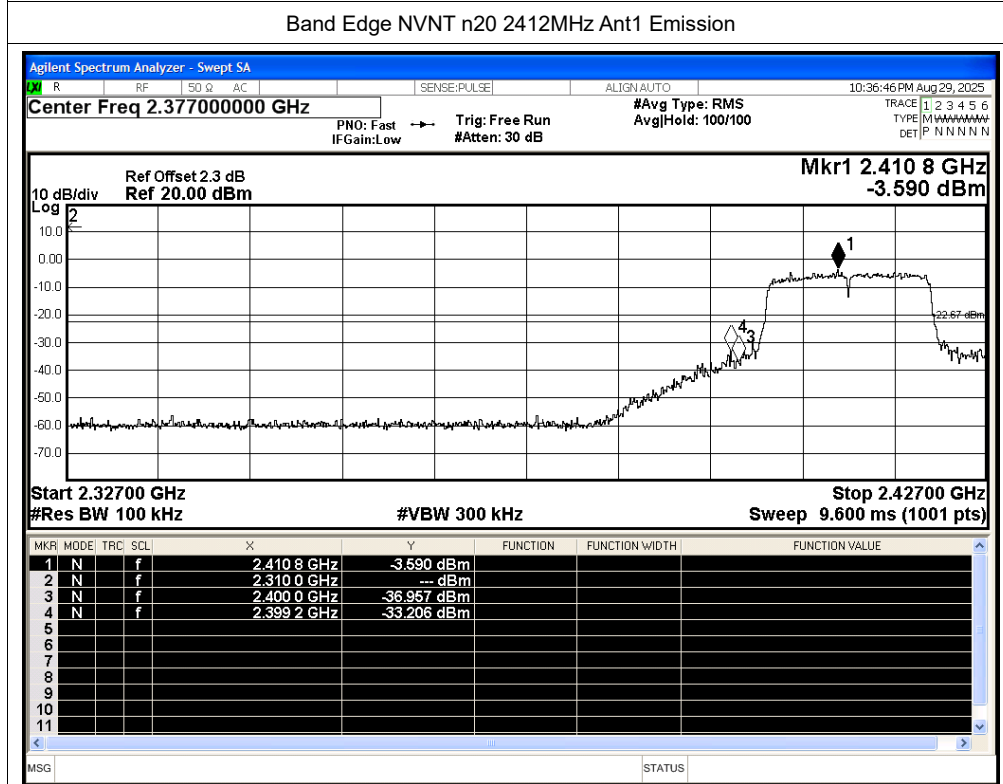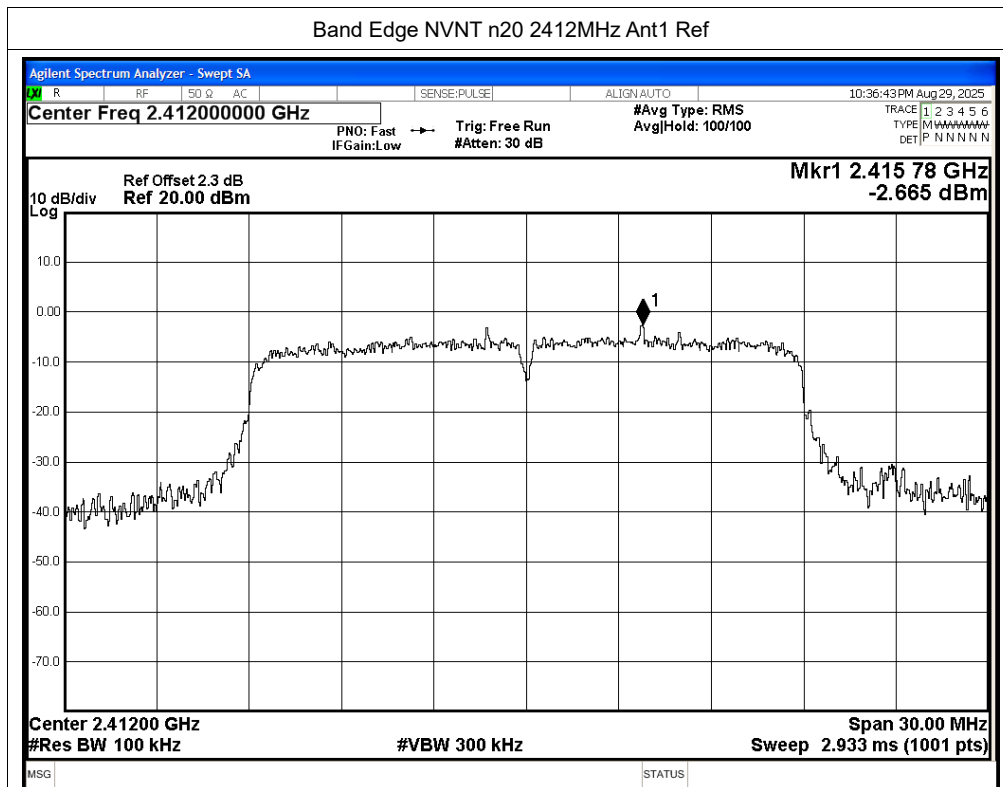


## Band Edge NVNT n20 2462MHz Ant1 Ref

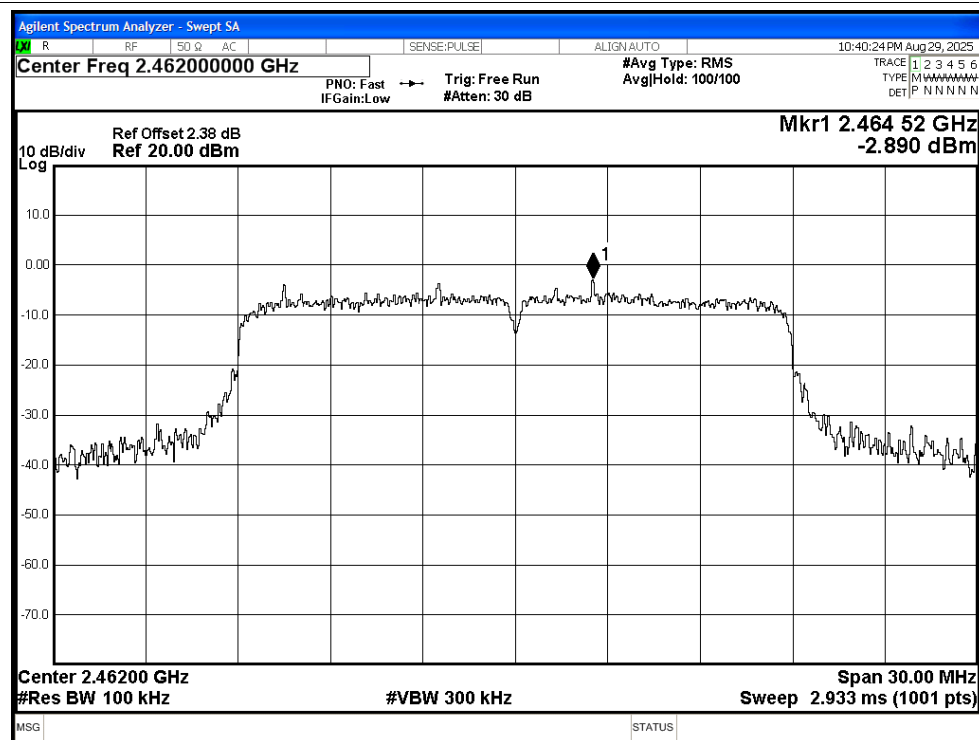


## Band Edge NVNT n20 2462MHz Ant1 Emission

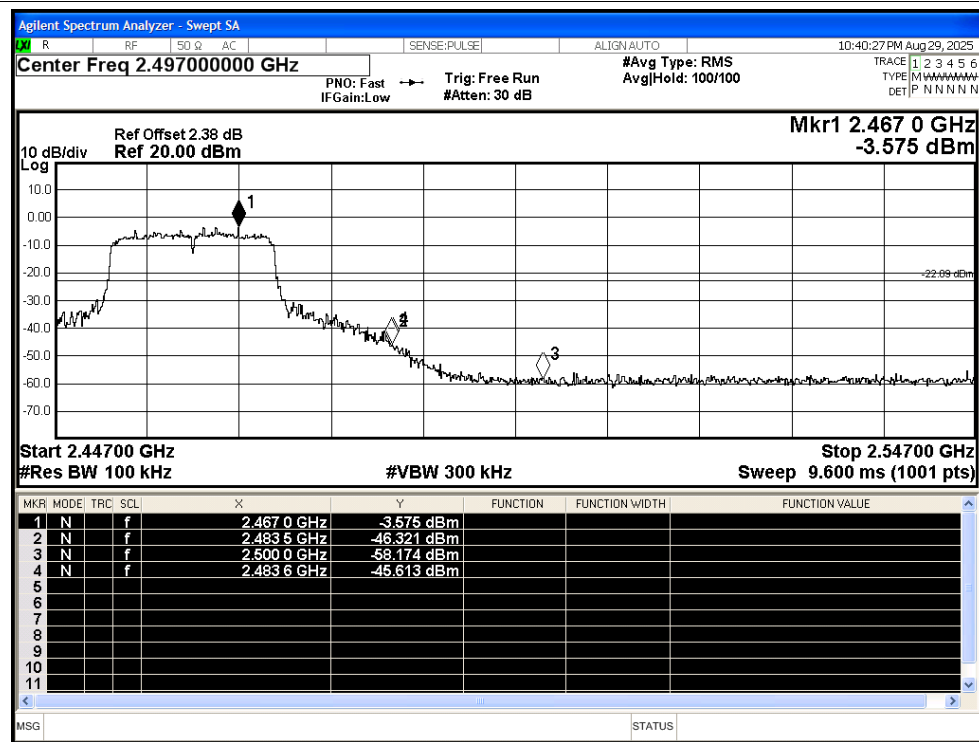



## Band Edge NVNT n40 2422MHz Ant1 Ref

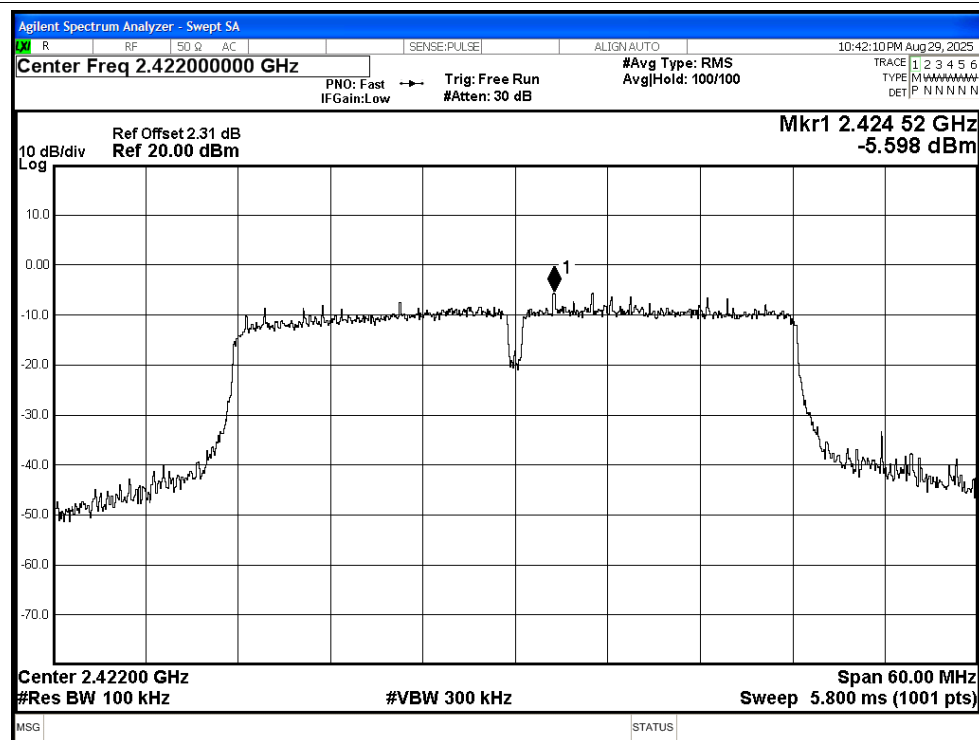

## Band Edge NVNT n40 2422MHz Ant1 Emission

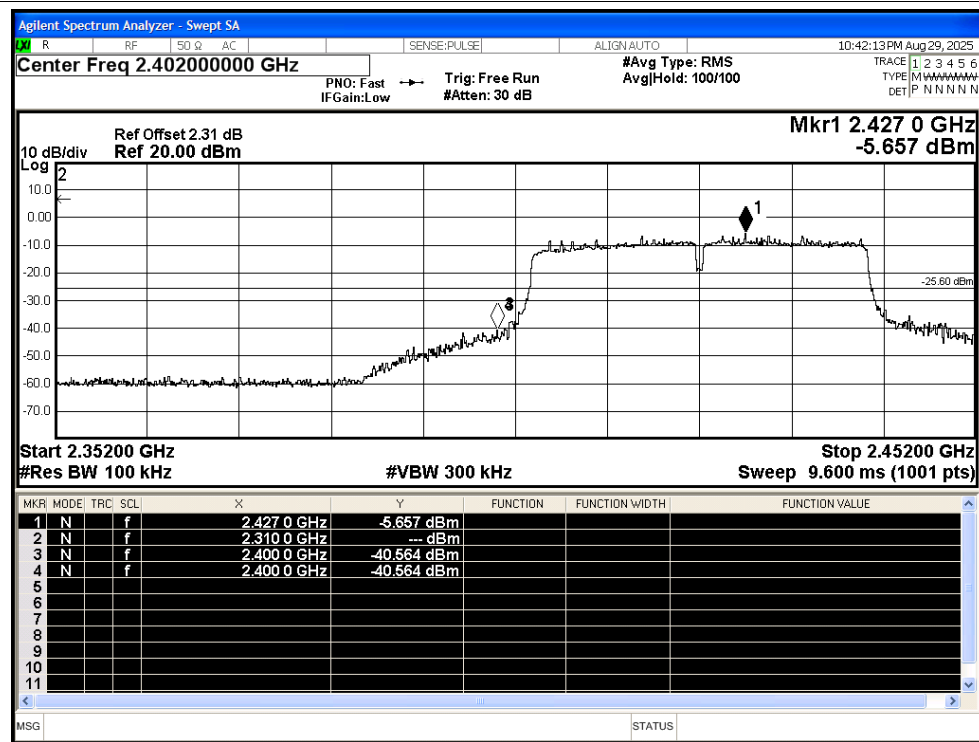



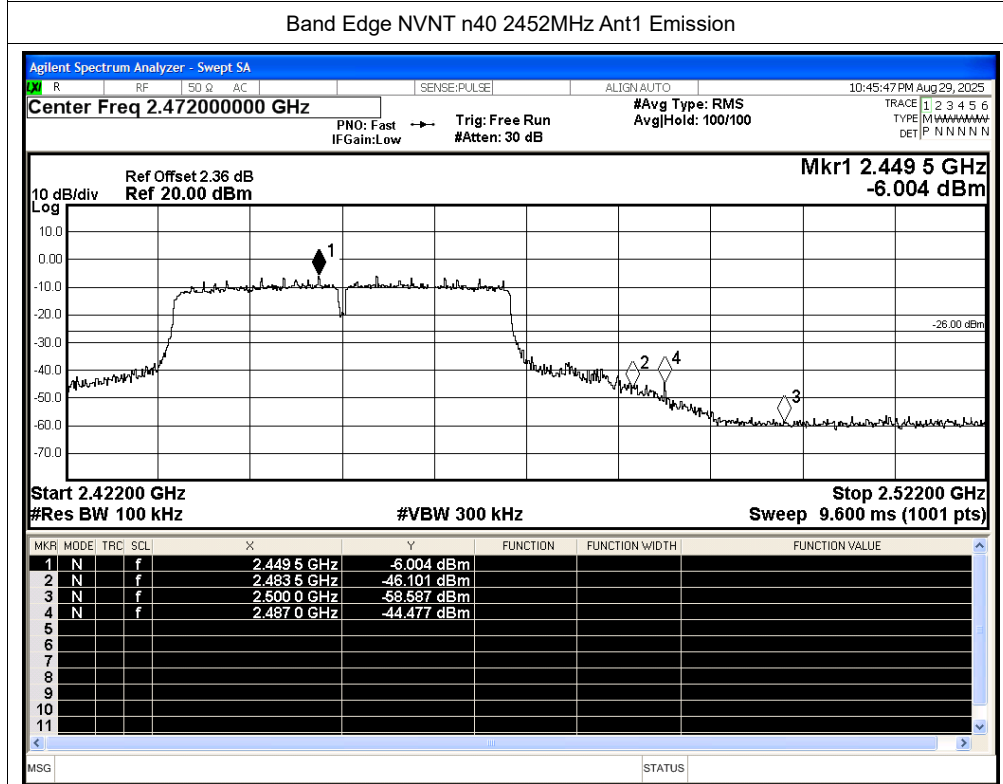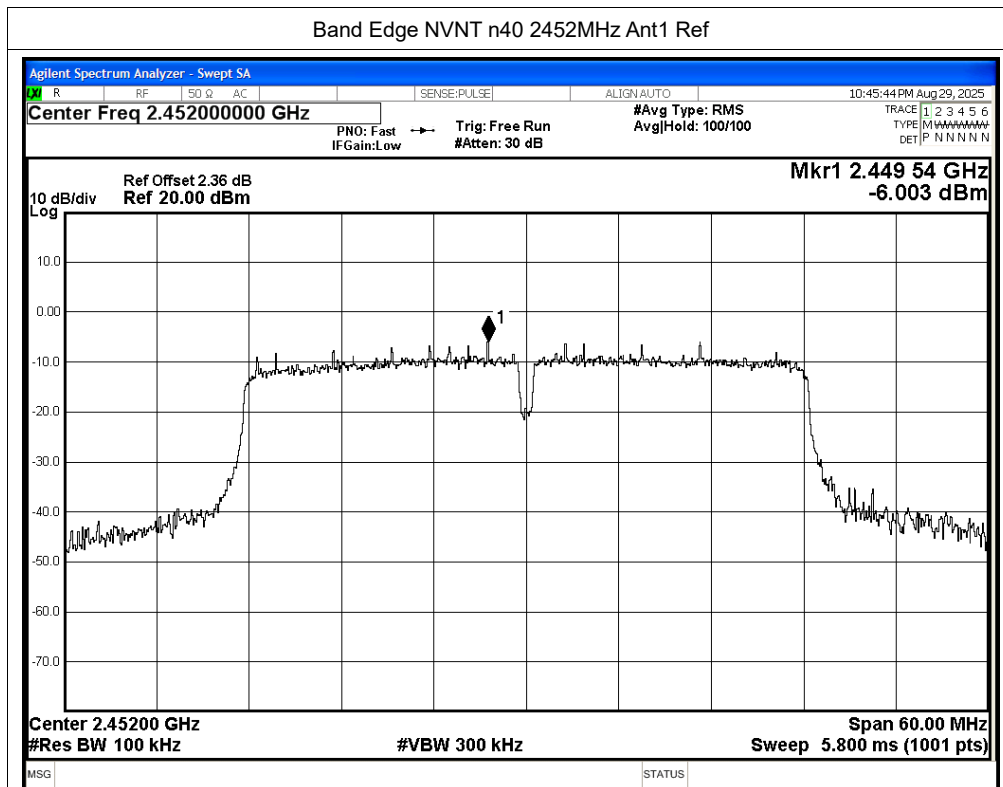


## C.5 Conducted RF Spurious Emission


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -49.24          | -20         | Pass    |
| NVNT      | b    | 2437            | Ant1    | -50.04          | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -50.23          | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -44.03          | -20         | Pass    |
| NVNT      | g    | 2437            | Ant1    | -43.53          | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -44.35          | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -42.36          | -20         | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -41.71          | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -43.05          | -20         | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -40.45          | -20         | Pass    |
| NVNT      | n40  | 2437            | Ant1    | -40.33          | -20         | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -39.14          | -20         | Pass    |

## Test Graphs


## Tx. Spurious NVNT b 2412MHz Ant1 Ref

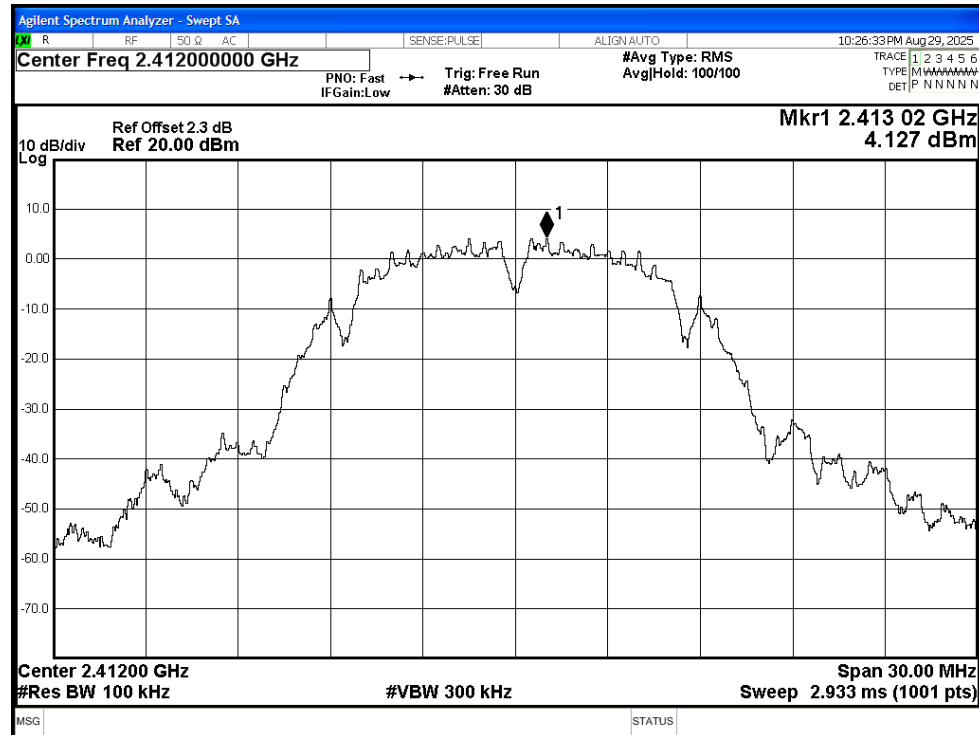


## Tx. Spurious NVNT b 2412MHz Ant1 Emission

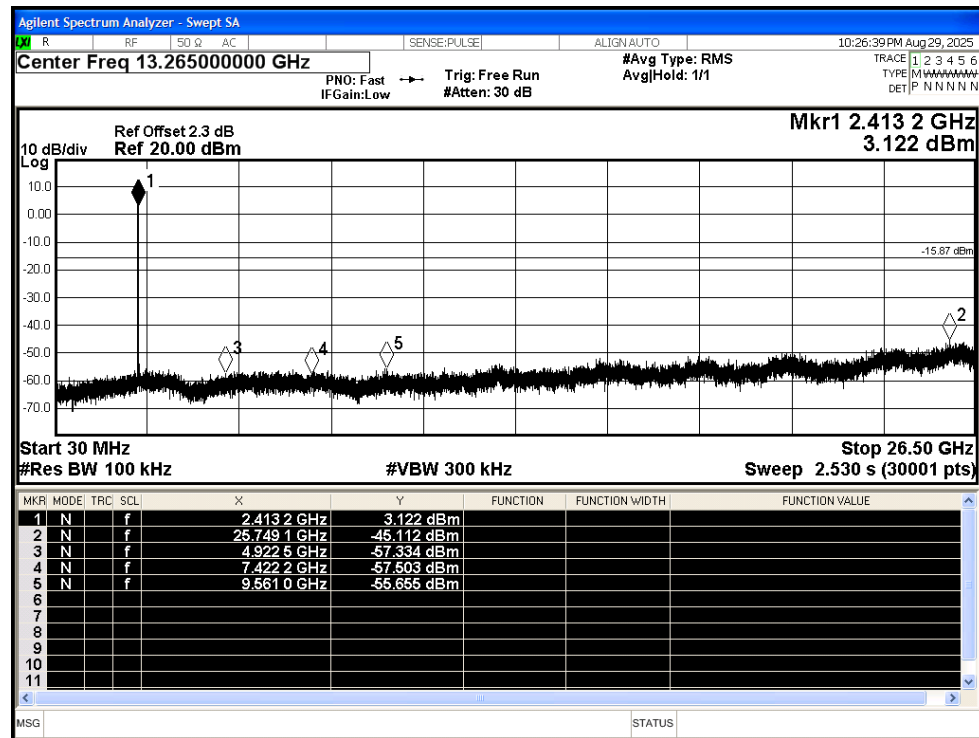


## Tx. Spurious NVNT b 2437MHz Ant1 Ref

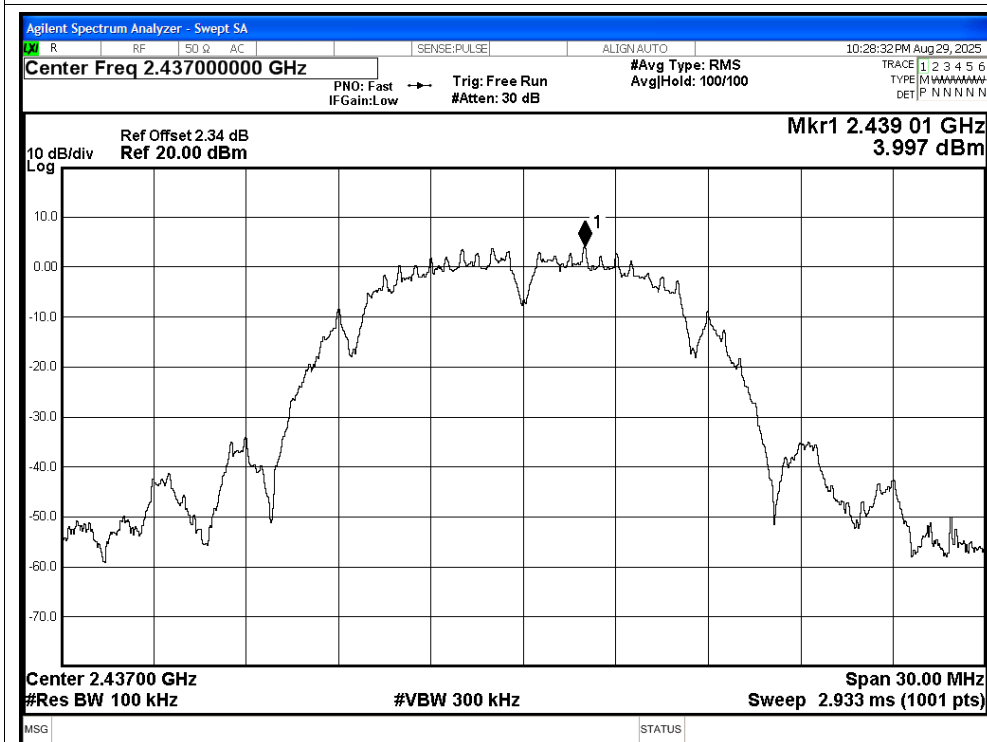


## Tx. Spurious NVNT b 2437MHz Ant1 Emission

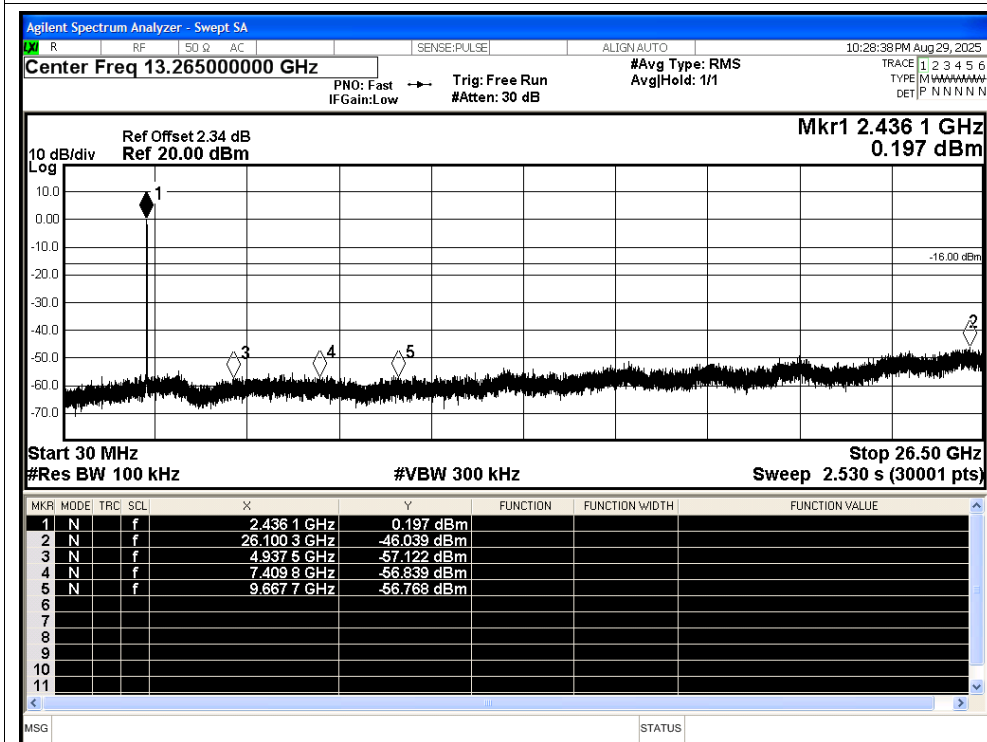


## Tx. Spurious NVNT b 2462MHz Ant1 Ref

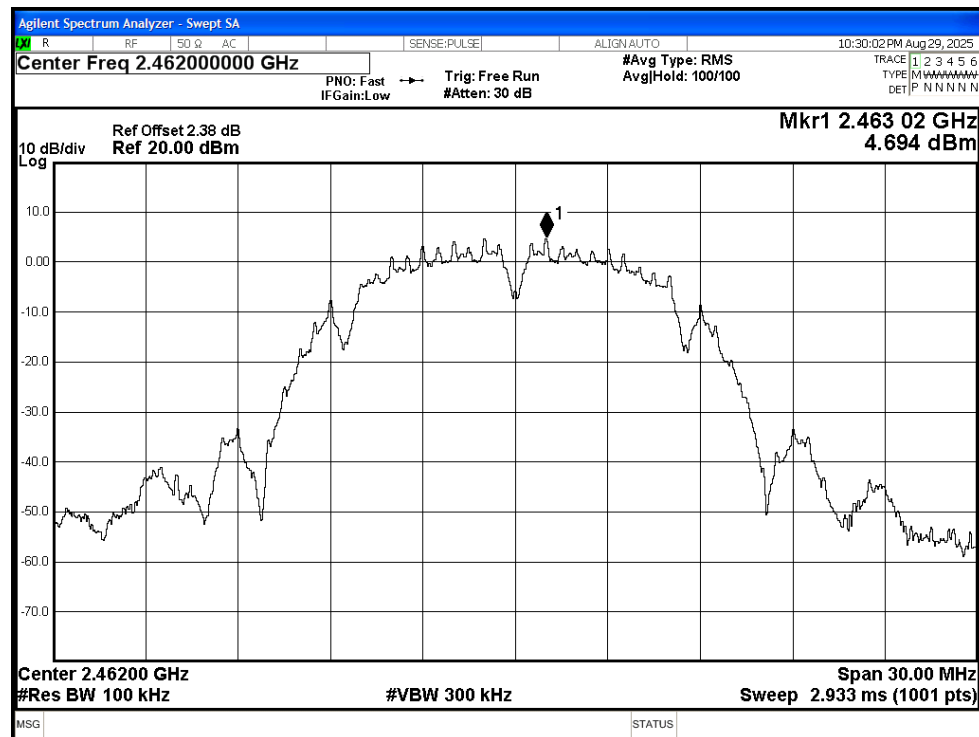


## Tx. Spurious NVNT b 2462MHz Ant1 Emission

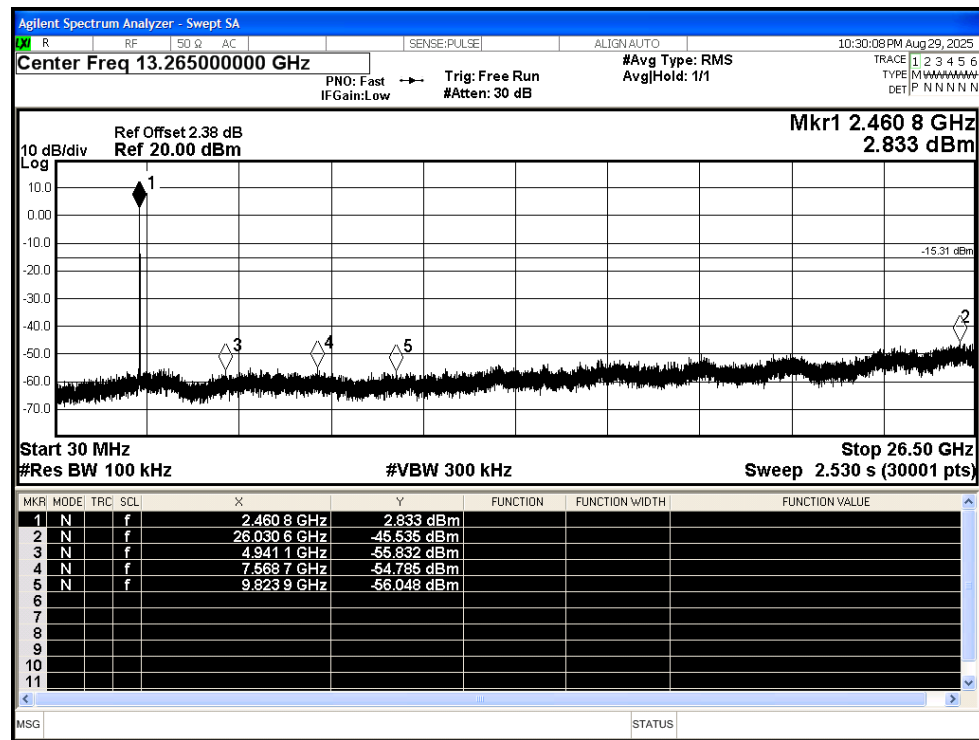

## Tx. Spurious NVNT g 2412MHz Ant1 Ref

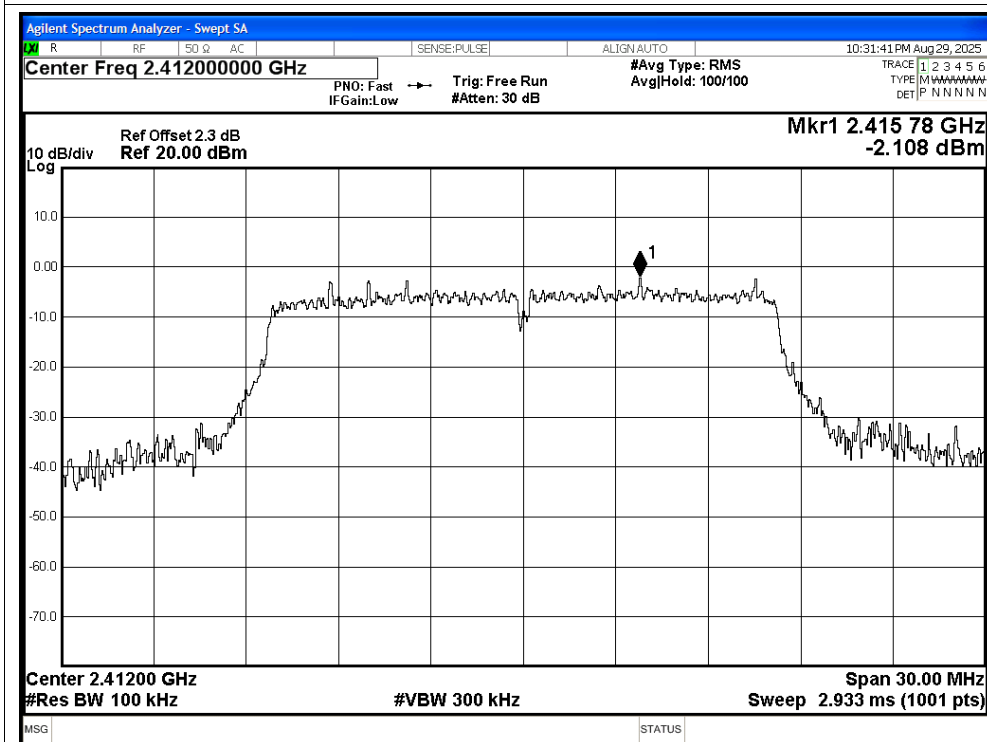

## Tx. Spurious NVNT g 2412MHz Ant1 Emission

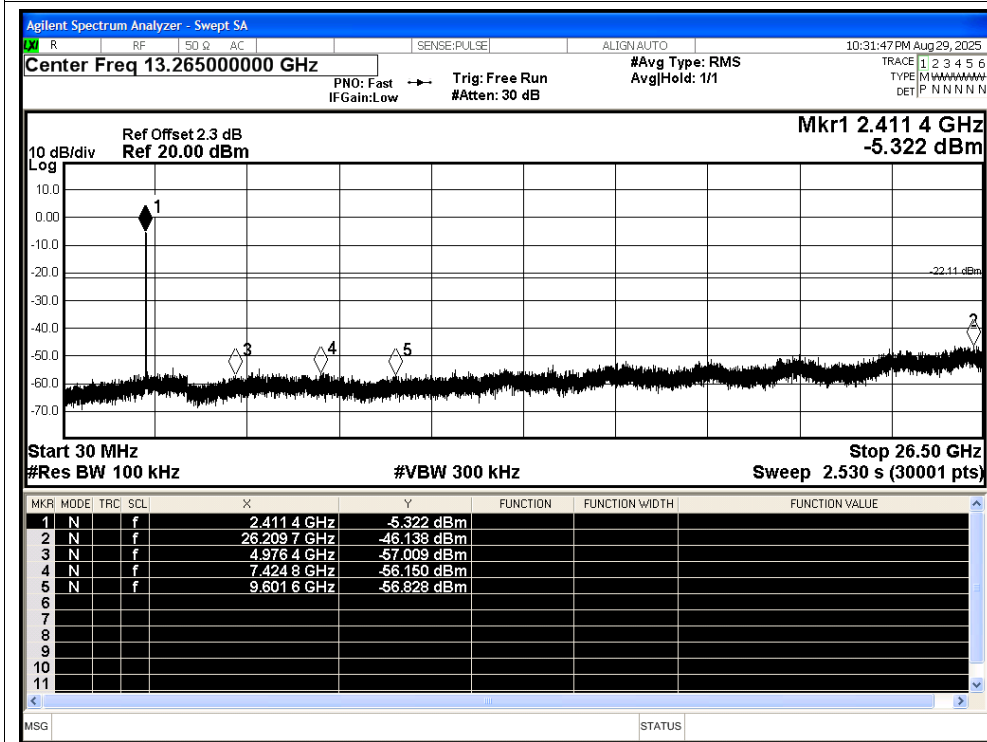

Tx. Spurious NVNT g 2437MHz Ant1 Ref

Agilent Spectrum Analyzer - Swept SA

10:33:22 PM Aug 29, 2025

Center Freq 2.437000000 GHz

PN0: Fast IFGain: Low Trig: Free Run #Atten: 30 dB

#Avg Type: RMS AvgHold: 100/100

TRACE 1 2 3 4 5 6  
TYPE M M M M M M M M  
DET P N N N N N N

Ref Offset 2.34 dB  
Ref 20.00 dBm

Mkr1 2.433 25 GHz  
-2.080 dBm

10 dB/div  
Log

The plot shows a spectrum with a central signal at 2.433 GHz. The y-axis is labeled '10 dB/div Log' and ranges from -70.0 to 10.0 dBm. The x-axis is labeled 'Center 2.43700 GHz' and ranges from 2.433 GHz to 2.441 GHz. A marker is placed at 2.433 25 GHz with a value of -2.080 dBm. The signal is noisy and has a bandwidth of 300 kHz. The resolution bandwidth is 100 kHz. The sweep time is 2.933 ms (1001 pts).

Center 2.43700 GHz

#Res BW 100 kHz


#VBW 300 kHz

Span 30.00 MHz


Sweep 2.933 ms (1001 pts)

[illegible]

## Tx. Spurious NVNT g 2462MHz Ant1 Ref

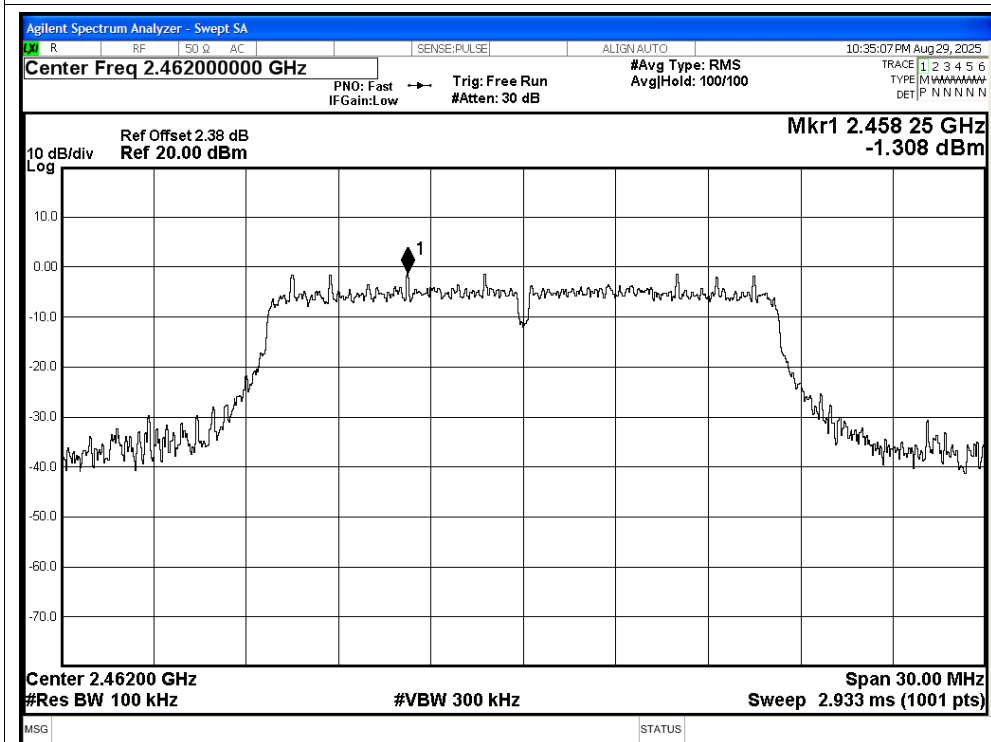


## Tx. Spurious NVNT g 2462MHz Ant1 Emission

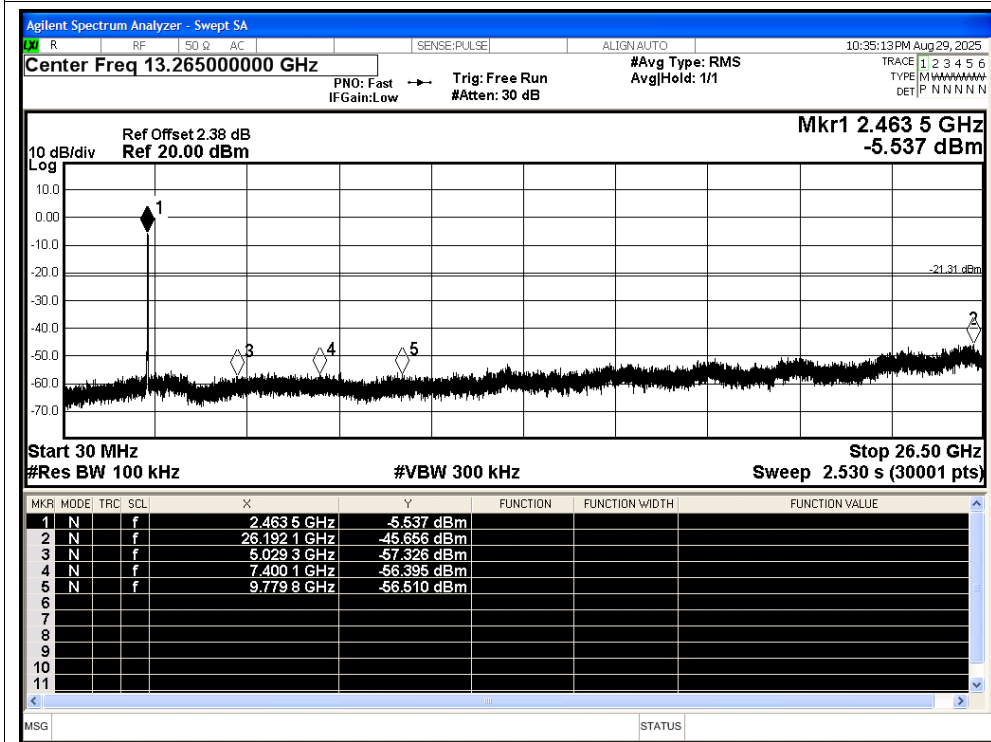





## Tx. Spurious NVNT n20 2412MHz Ant1 Ref

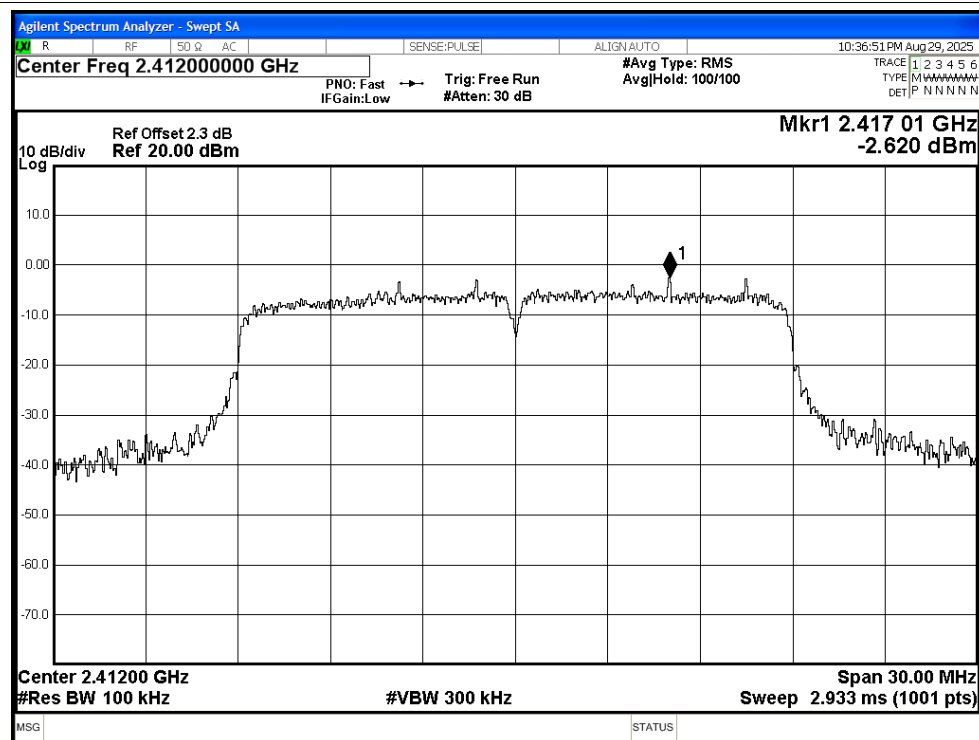


## Tx. Spurious NVNT n20 2412MHz Ant1 Emission

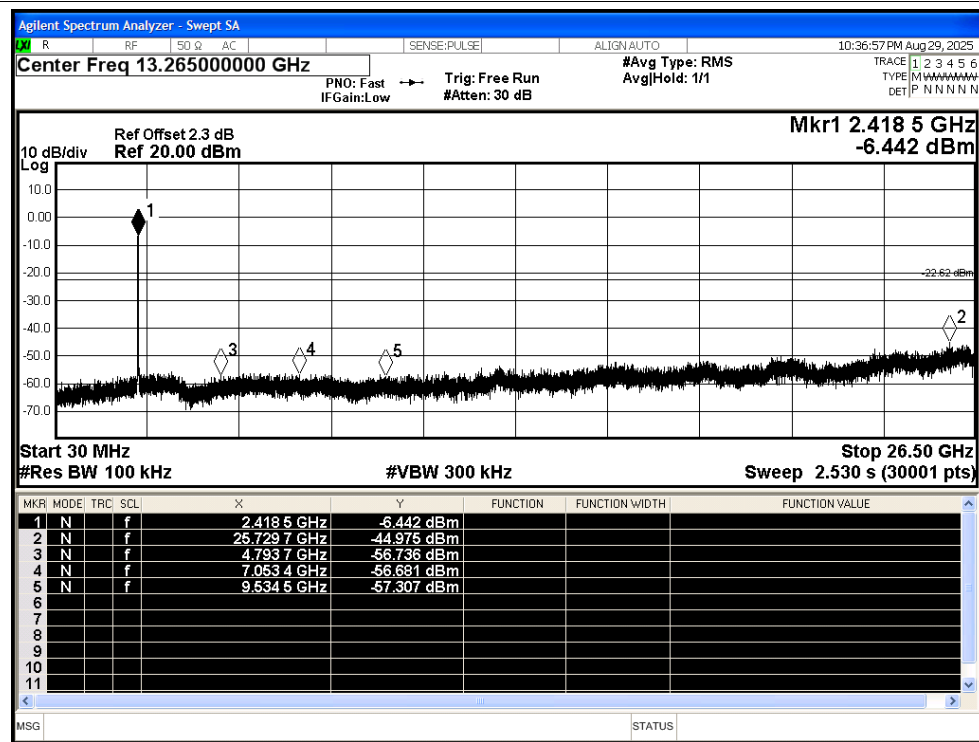


## Tx. Spurious NVNT n20 2437MHz Ant1 Ref

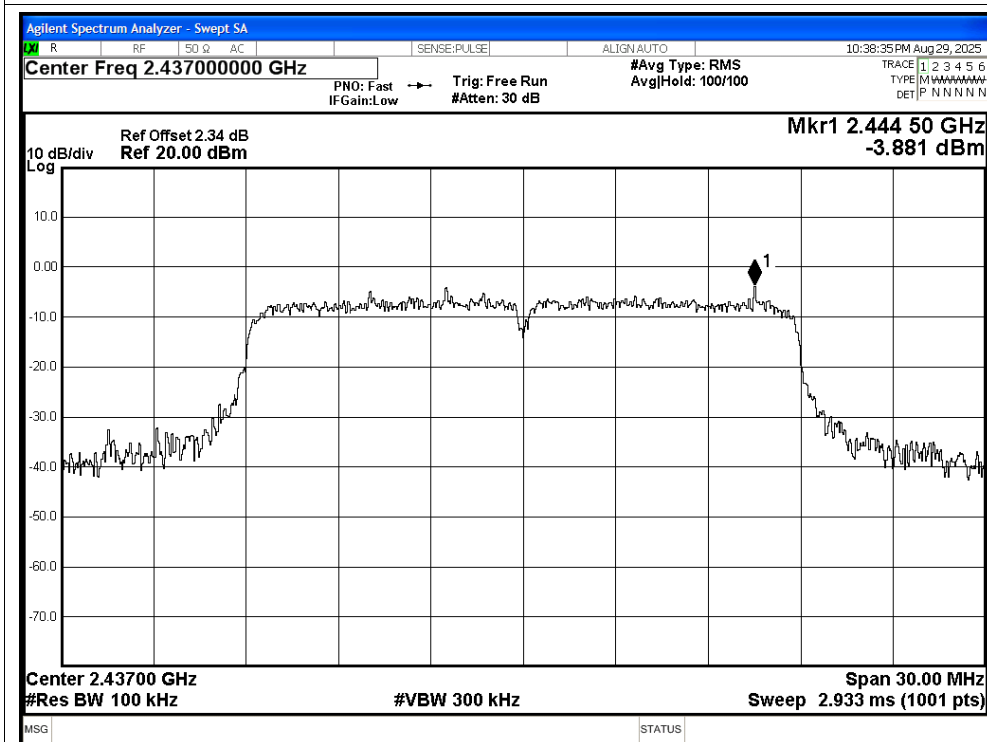


## Tx. Spurious NVNT n20 2437MHz Ant1 Emission

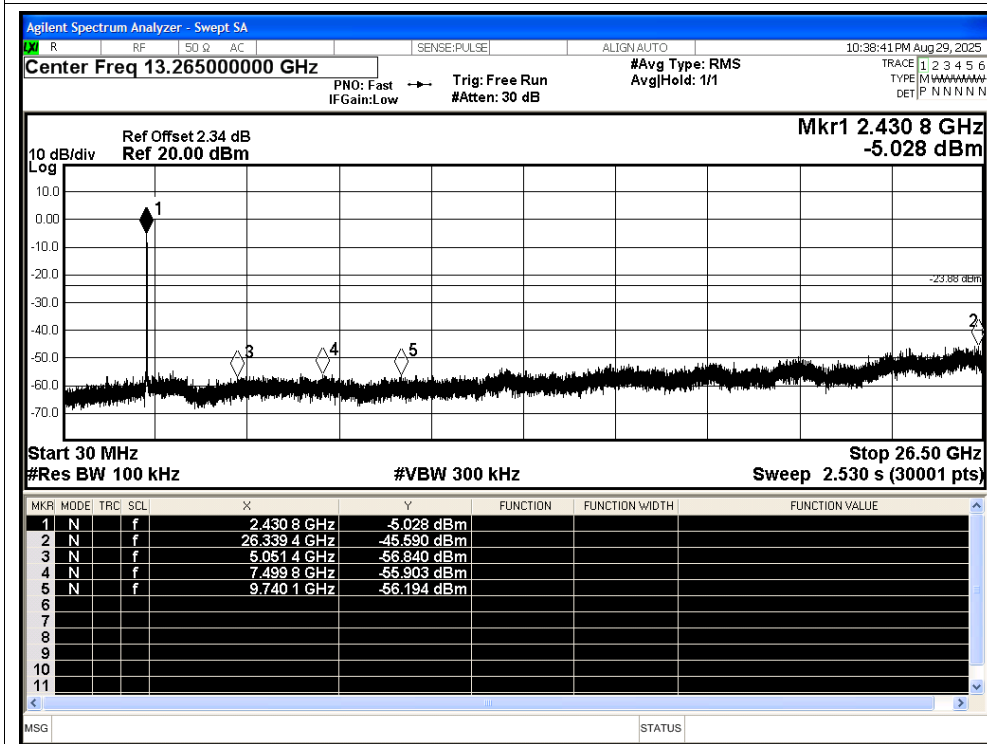


## Tx. Spurious NVNT n20 2462MHz Ant1 Ref

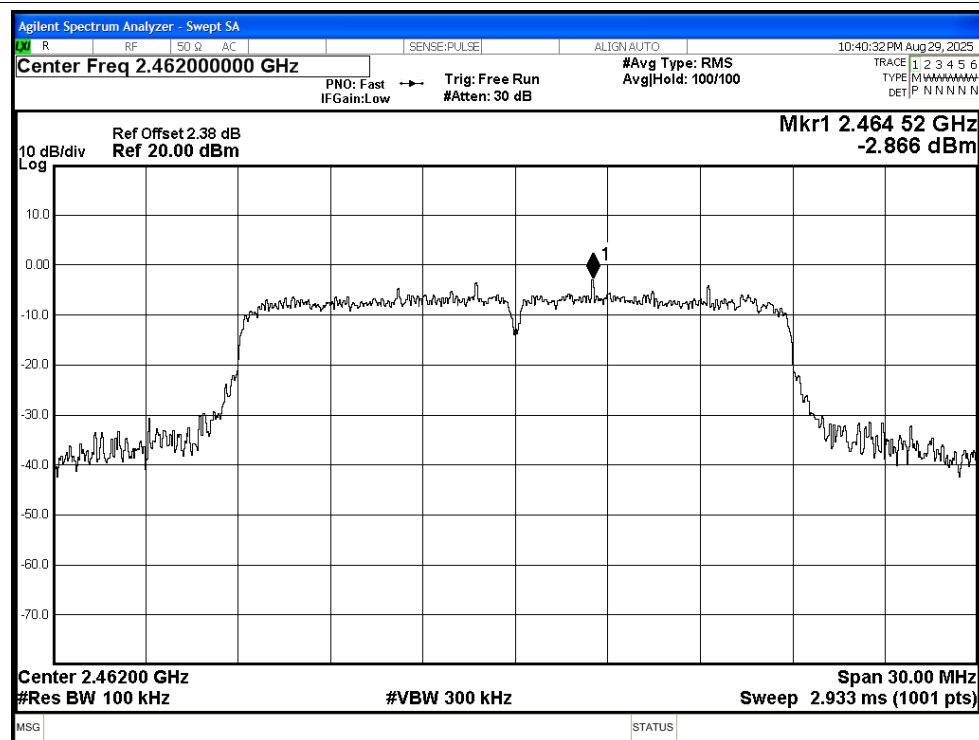


## Tx. Spurious NVNT n20 2462MHz Ant1 Emission

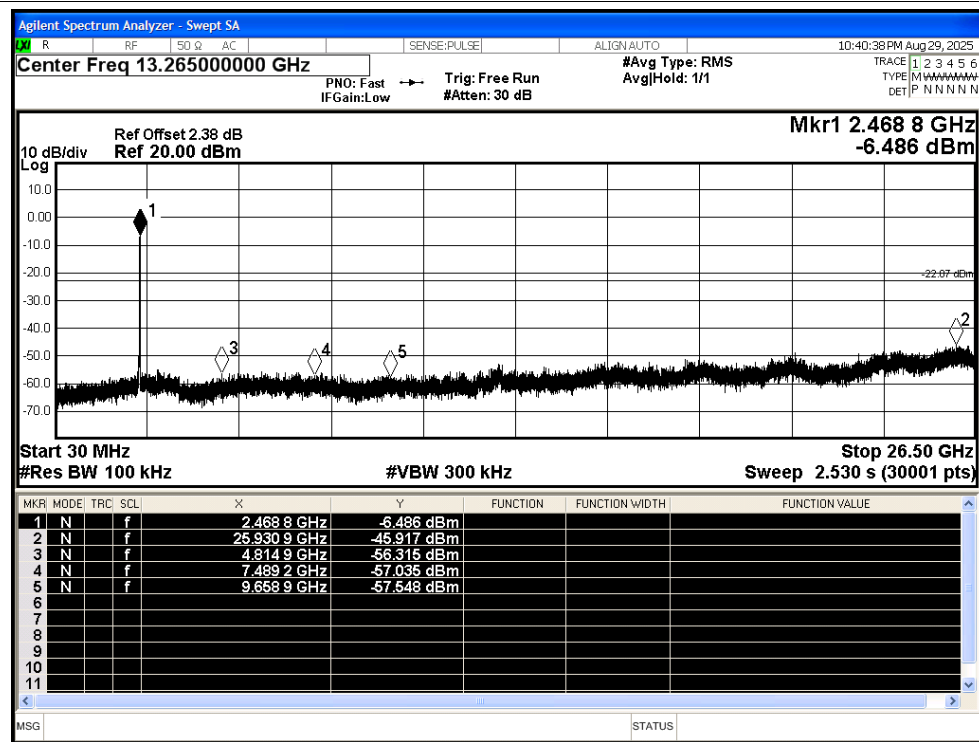


## Tx. Spurious NVNT n40 2422MHz Ant1 Ref

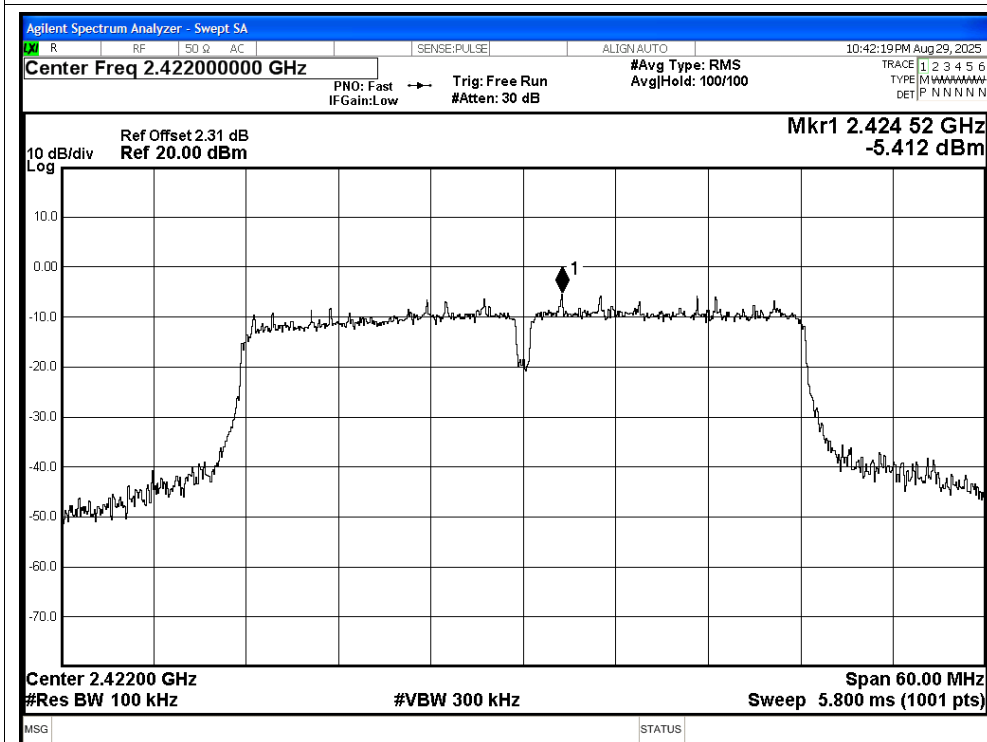


## Tx. Spurious NVNT n40 2422MHz Ant1 Emission

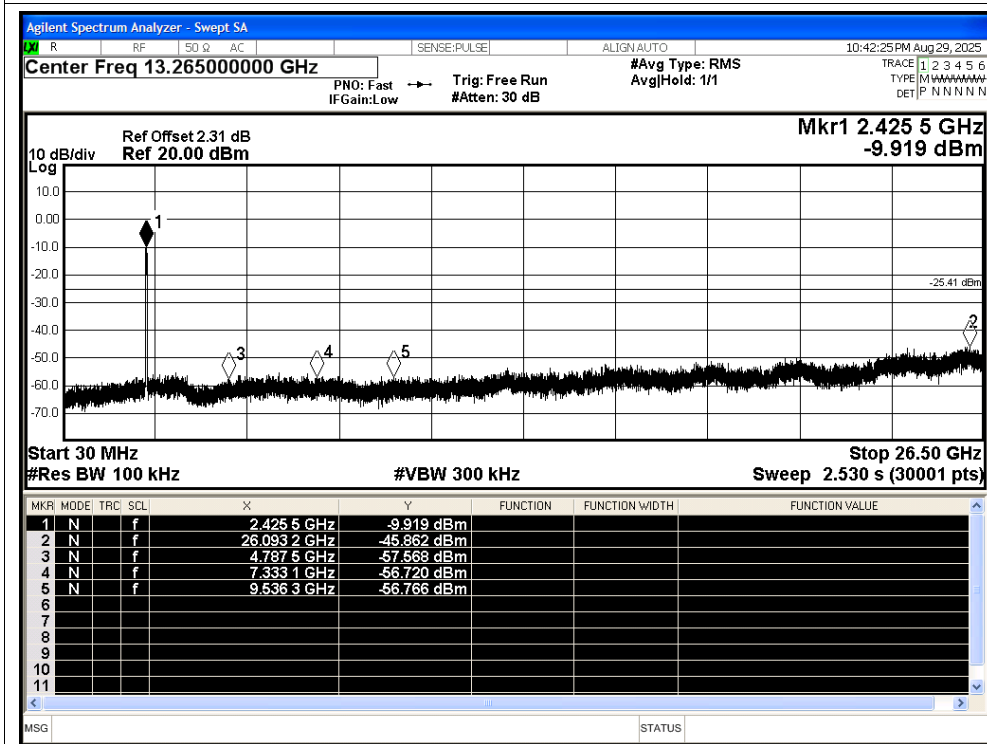


## Tx. Spurious NVNT n40 2437MHz Ant1 Ref

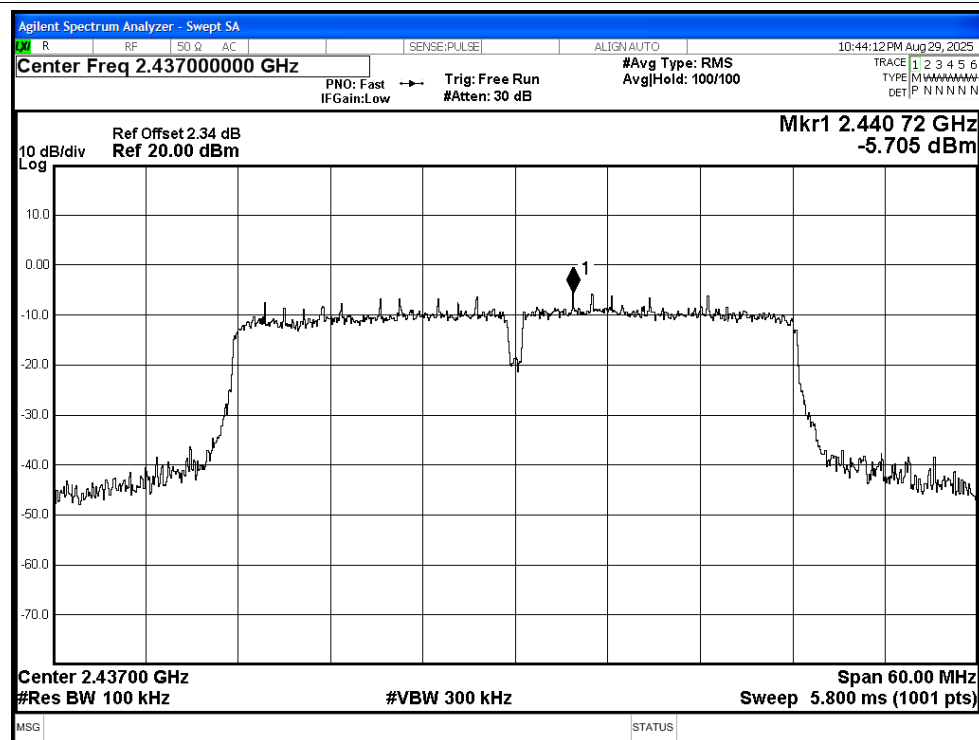


## Tx. Spurious NVNT n40 2437MHz Ant1 Emission

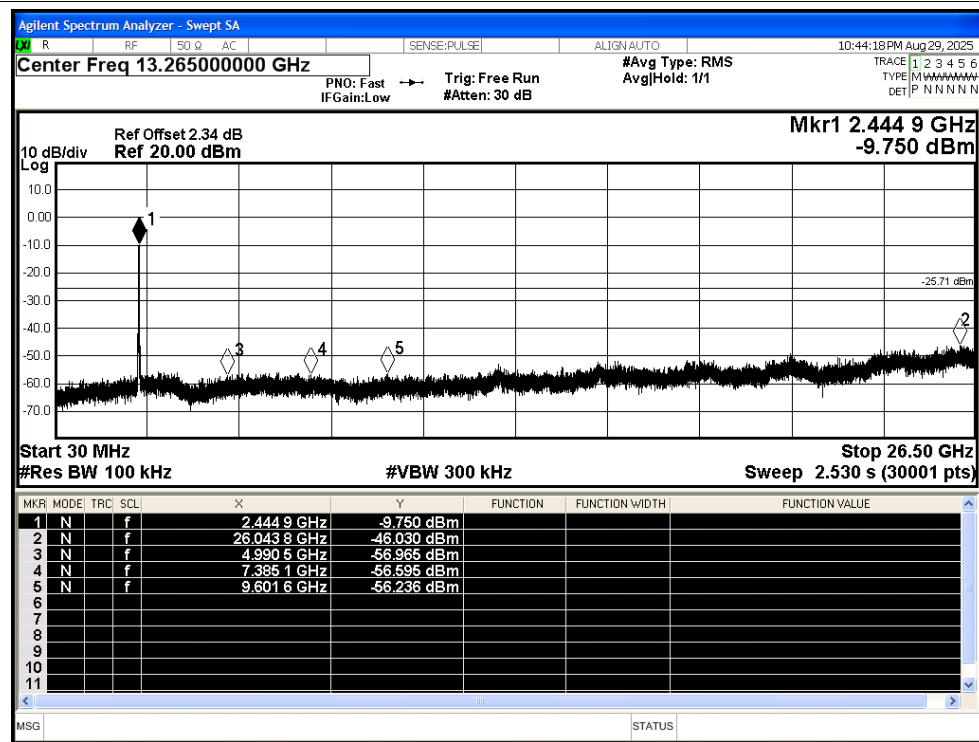

## Tx. Spurious NVNT n40 2452MHz Ant1 Ref

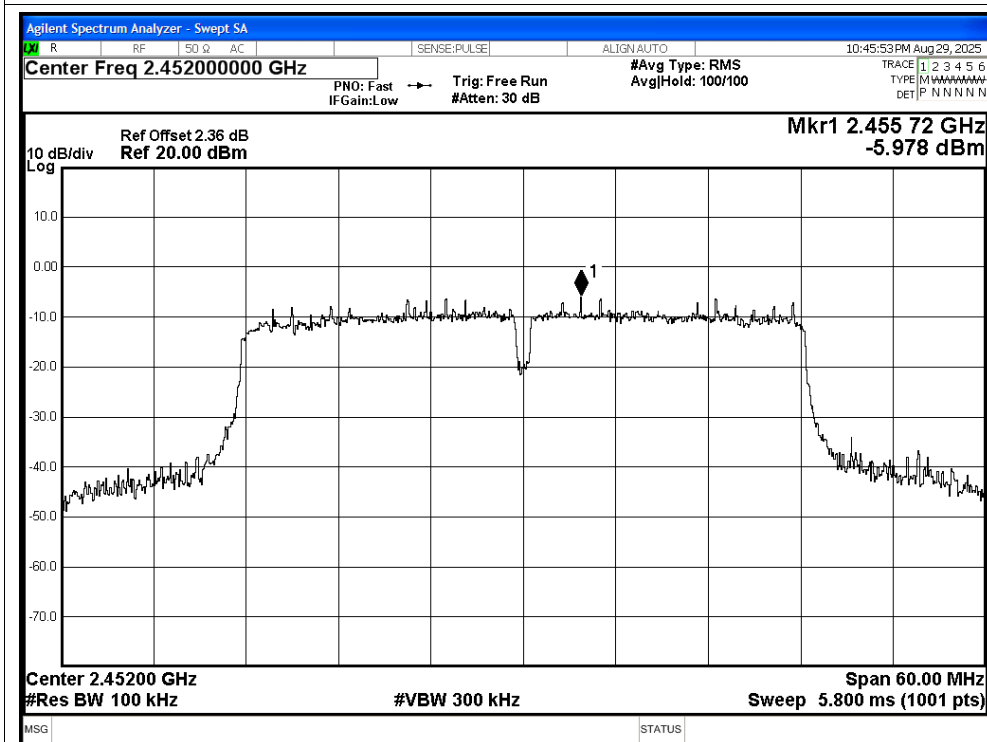

## Tx. Spurious NVNT n40 2452MHz Ant1 Emission

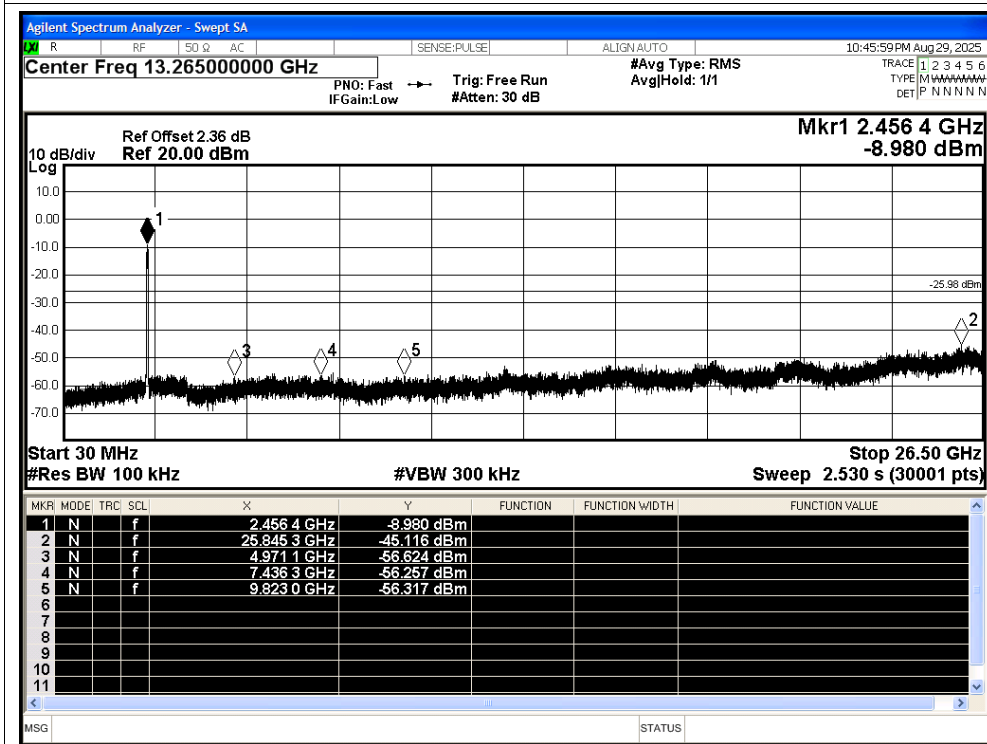


## C.6 Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | b    | 2412            | Ant1    | 98.87          | 0                      | 0.15      |
| NVNT      | b    | 2437            | Ant1    | 99.13          | 0                      | 0.15      |
| NVNT      | b    | 2462            | Ant1    | 99.13          | 0                      | 0.15      |
| NVNT      | g    | 2412            | Ant1    | 97.68          | 0.1                    | 0.37      |
| NVNT      | g    | 2437            | Ant1    | 97.75          | 0.1                    | 0.37      |
| NVNT      | g    | 2462            | Ant1    | 97.75          | 0.1                    | 0.37      |
| NVNT      | n20  | 2412            | Ant1    | 97.25          | 0.12                   | 0.44      |
| NVNT      | n20  | 2437            | Ant1    | 97.25          | 0.12                   | 0.44      |
| NVNT      | n20  | 2462            | Ant1    | 97.25          | 0.12                   | 0.44      |
| NVNT      | n40  | 2422            | Ant1    | 94.7           | 0.24                   | 0.9       |
| NVNT      | n40  | 2437            | Ant1    | 94.71          | 0.24                   | 0.9       |
| NVNT      | n40  | 2452            | Ant1    | 94.71          | 0.24                   | 0.9       |

## Test Graphs

## Duty Cycle NVNT b 2412MHz Ant1

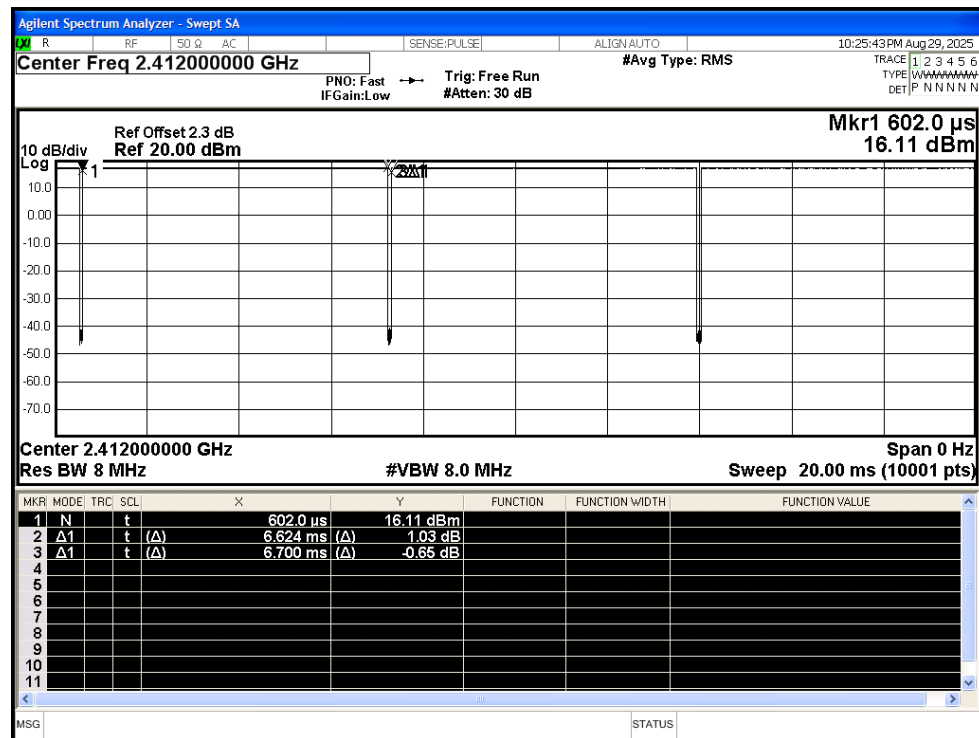


## Duty Cycle NVNT b 2437MHz Ant1

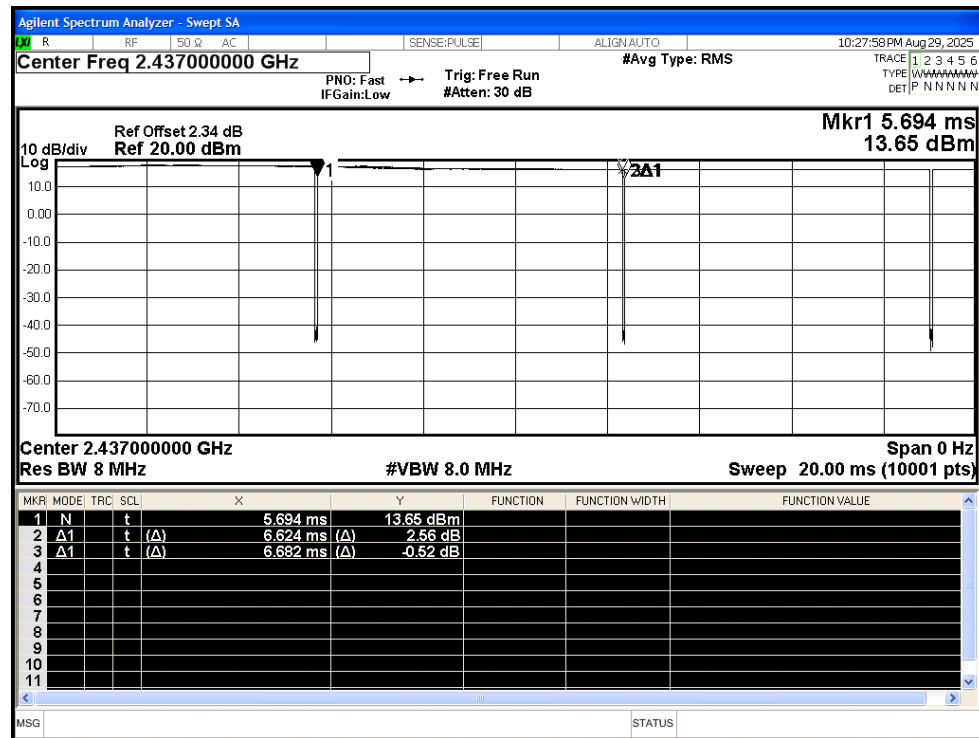





## Duty Cycle NVNT b 2462MHz Ant1

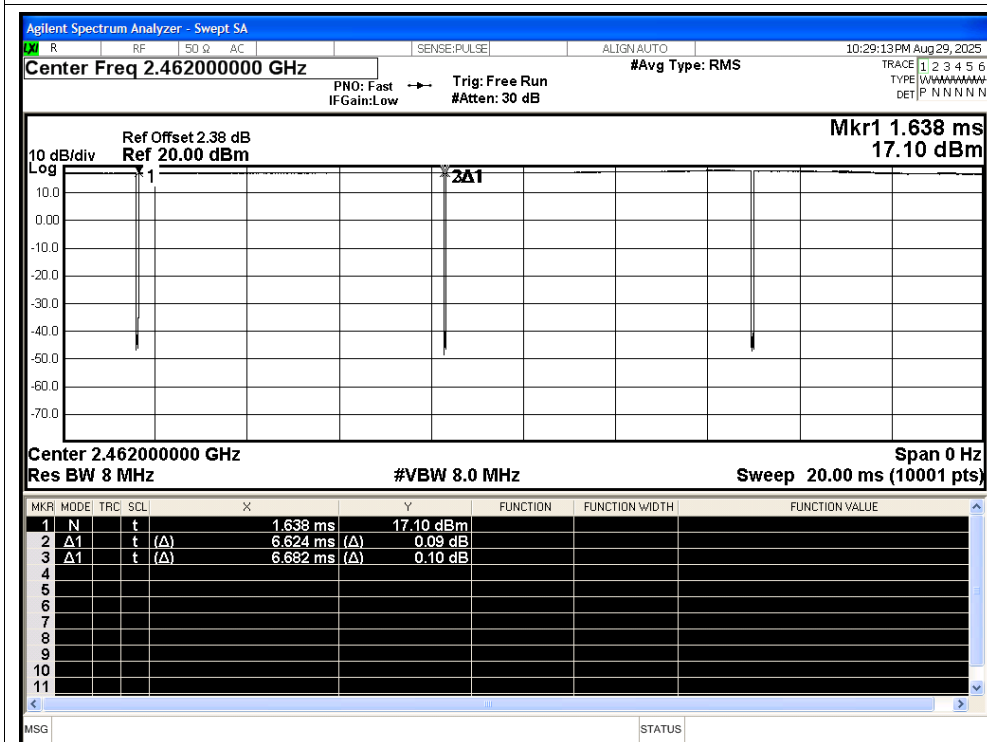


## Duty Cycle NVNT g 2412MHz Ant1

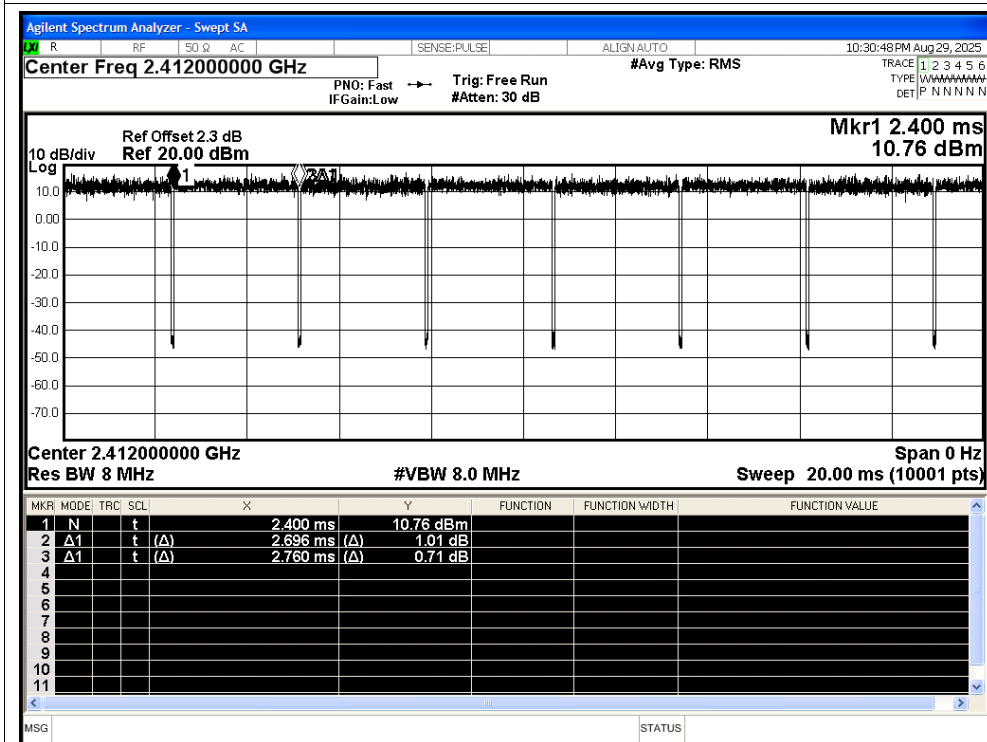


## Duty Cycle NVNT g 2437MHz Ant1

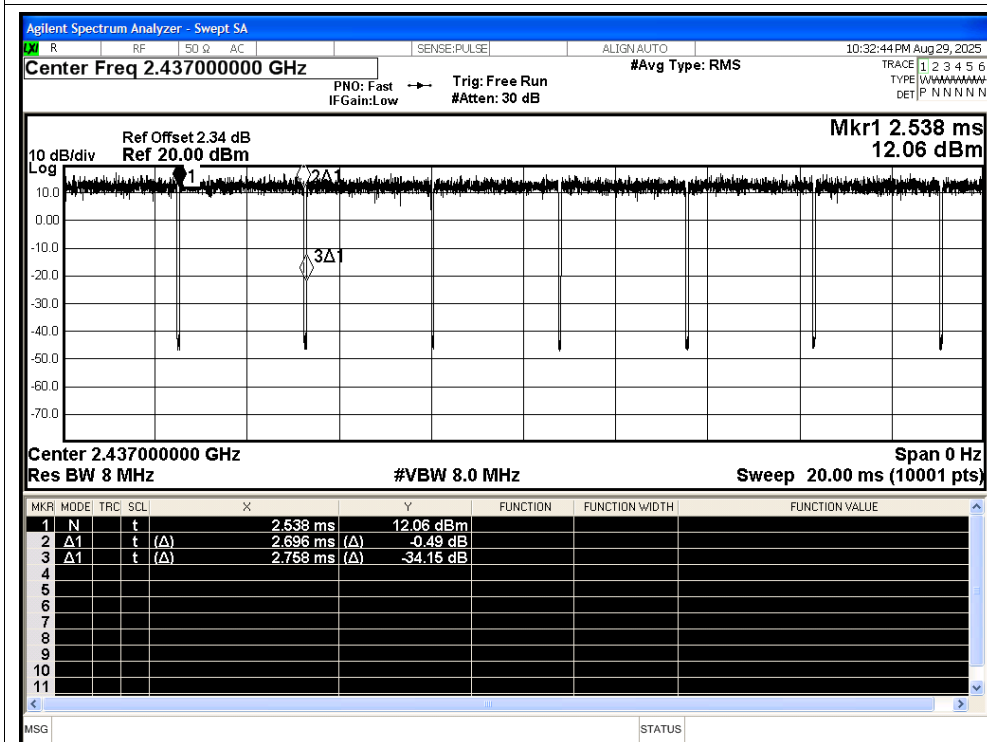


## Duty Cycle NVNT g 2462MHz Ant1


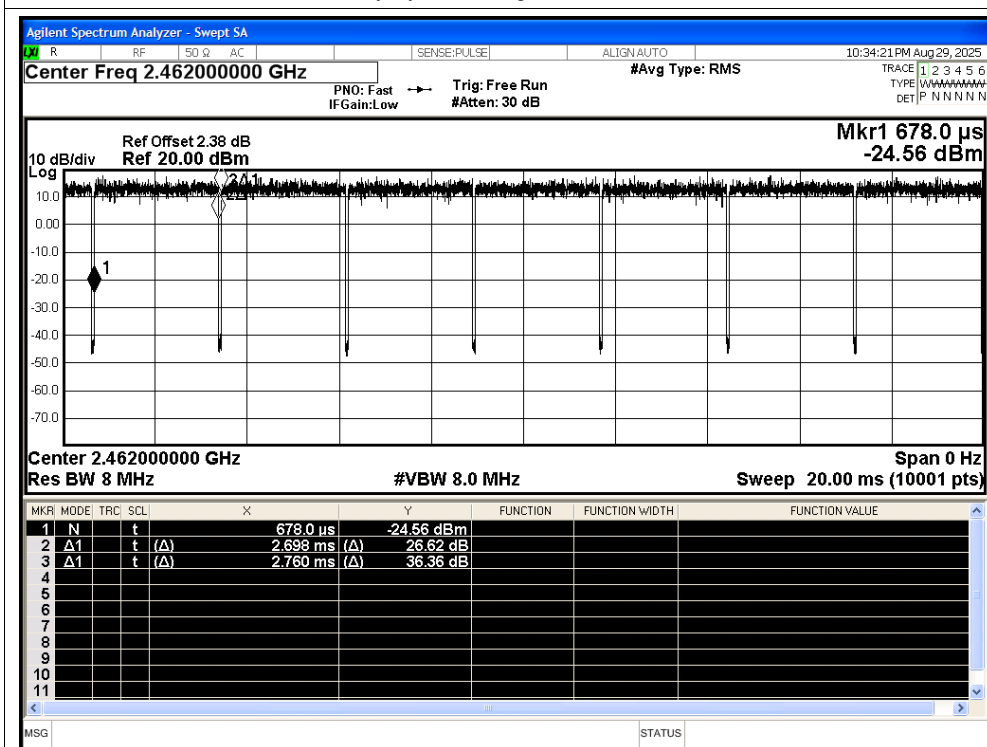


## Duty Cycle NVNT n20 2412MHz Ant1

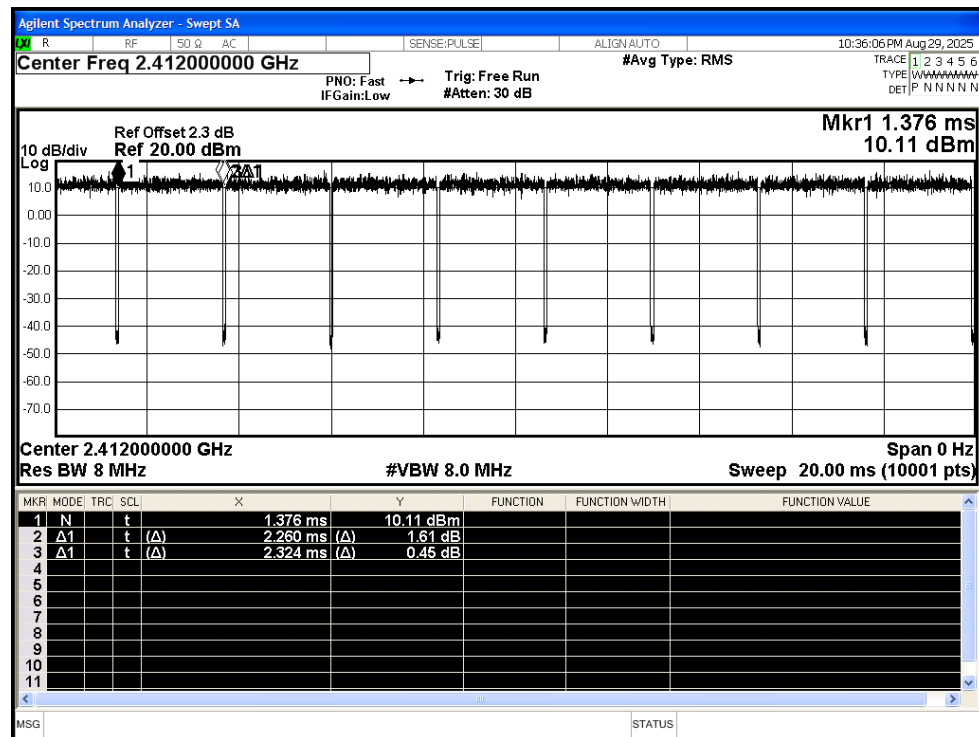


## Duty Cycle NVNT n20 2437MHz Ant1

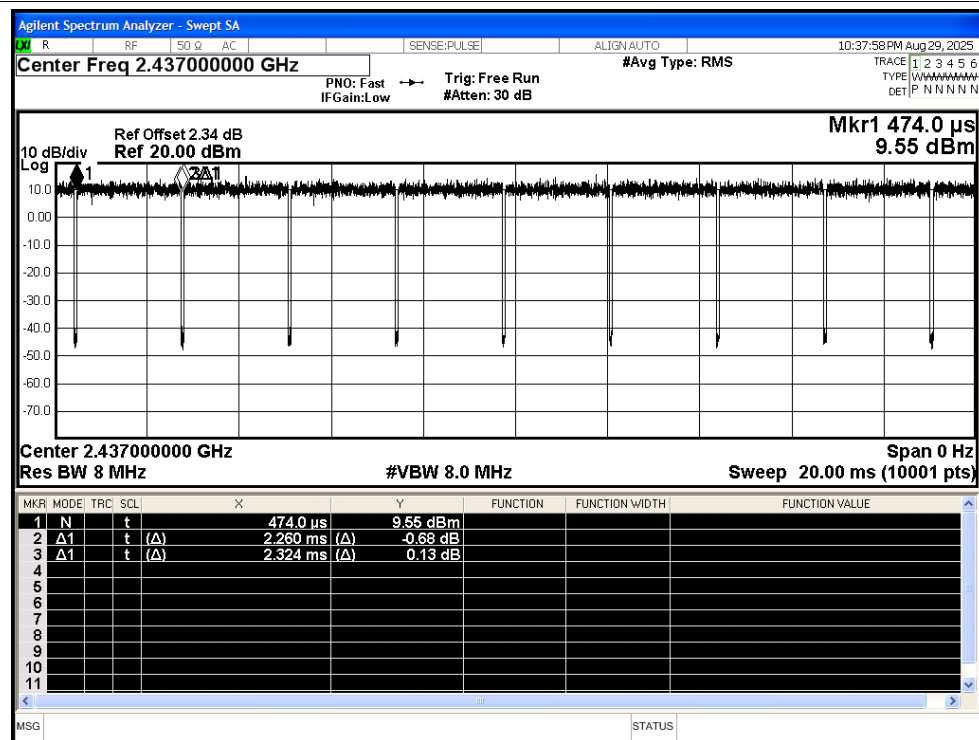


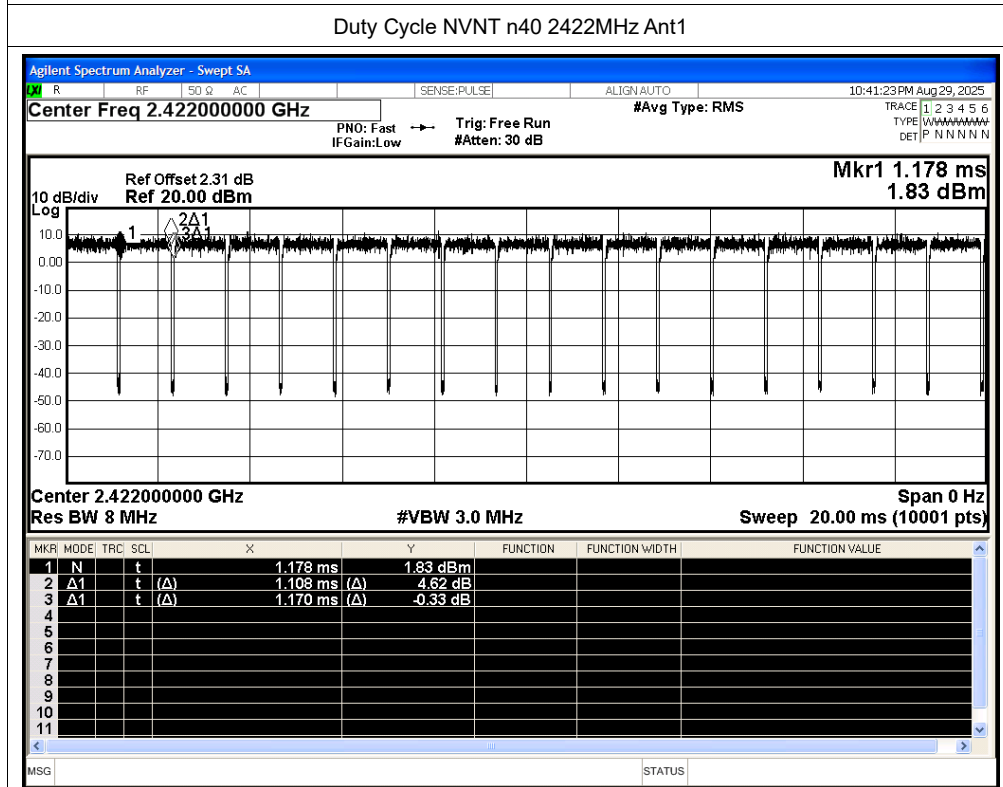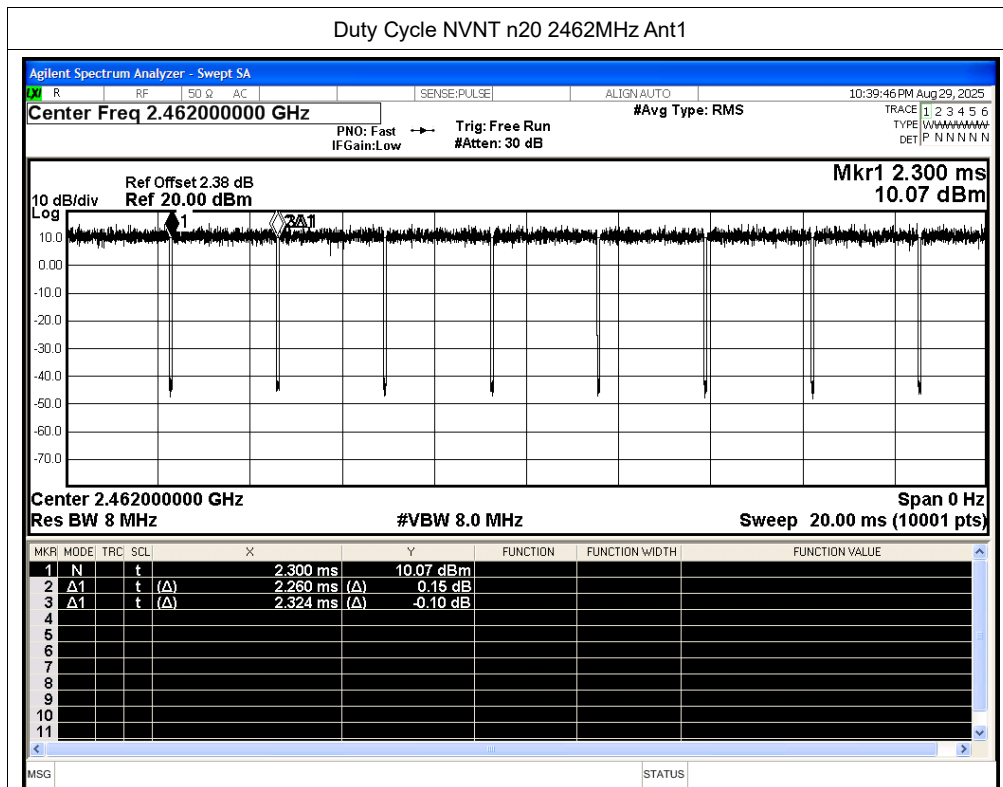

## Duty Cycle NVNT n40 2437MHz Ant1

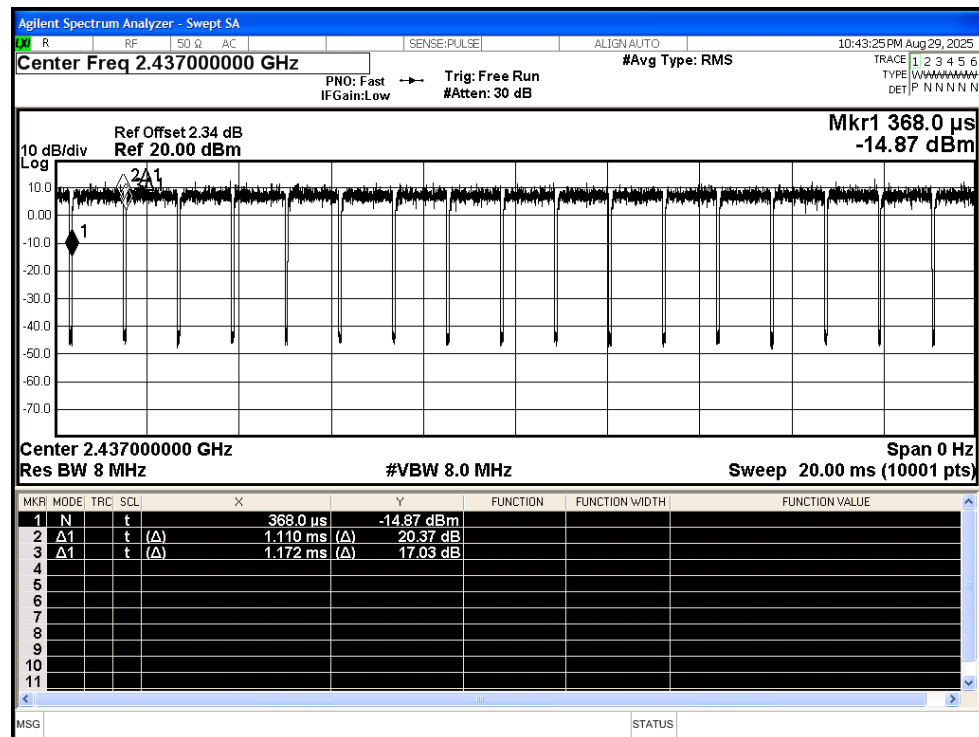

## Duty Cycle NVNT n40 2452MHz Ant1

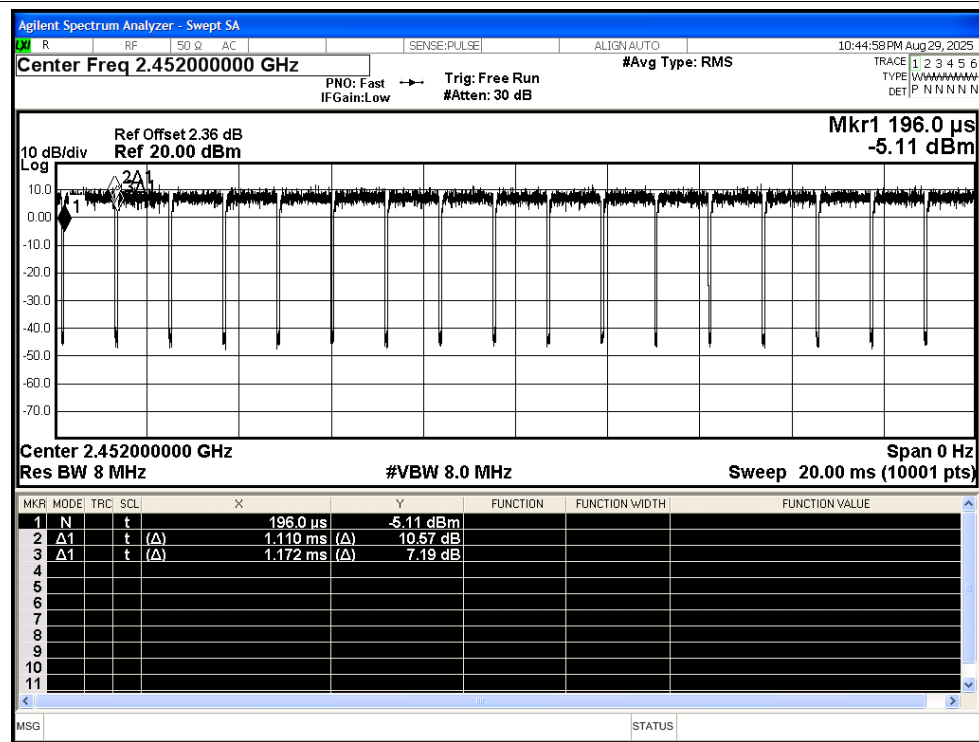


## C.7 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|------------|----------|----------------|---------|
| NVNT      | b    | 2412            | Ant1    | 2310            | -50.09      | 2.98       | -                | 48.15      | Peak     | 74             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2310            | -57.96      | 2.98       | 0                | 40.28      | Average  | 54             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2389.677        | -47.01      | 2.98       | -                | 51.23      | Peak     | 74             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2389.677        | -55.51      | 2.98       | 0                | 42.73      | Average  | 54             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2390            | -48.1       | 2.98       | -                | 50.14      | Peak     | 74             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2390            | -55.84      | 2.98       | 0                | 42.40      | Average  | 54             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2483.5          | -48.39      | 2.98       | -                | 49.85      | Peak     | 74             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2483.5          | -55.4       | 2.98       | 0                | 42.84      | Average  | 54             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2490.195        | -43.83      | 2.98       | -                | 54.41      | Peak     | 74             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2484.63         | -54.21      | 2.98       | 0                | 44.03      | Average  | 54             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2500            | -51.34      | 2.98       | -                | 46.90      | Peak     | 74             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2500            | -57.38      | 2.98       | 0                | 40.86      | Average  | 54             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2310            | -49.24      | 2.98       | -                | 49.00      | Peak     | 74             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2310            | -58.59      | 2.98       | 0.1              | 39.75      | Average  | 54             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2388.039        | -38.03      | 2.98       | -                | 60.21      | Peak     | 74             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2389.56         | -52         | 2.98       | 0.1              | 46.34      | Average  | 54             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2390            | -39.01      | 2.98       | -                | 59.23      | Peak     | 74             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2390            | -52.21      | 2.98       | 0.1              | 46.13      | Average  | 54             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2483.5          | -42.02      | 2.98       | -                | 56.22      | Peak     | 74             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2483.5          | -56.3       | 2.98       | 0.1              | 42.04      | Average  | 54             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2484.365        | -40.04      | 2.98       | -                | 58.20      | Peak     | 74             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2483.941        | -55.87      | 2.98       | 0.1              | 42.47      | Average  | 54             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2500            | -49.22      | 2.98       | -                | 49.02      | Peak     | 74             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2500            | -57.95      | 2.98       | 0.1              | 40.39      | Average  | 54             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2310            | -50.7       | 2.98       | -                | 47.54      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2310            | -58.74      | 2.98       | 0.12             | 39.62      | Average  | 54             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2389.443        | -44.97      | 2.98       | -                | 53.27      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2389.794        | -56.39      | 2.98       | 0.12             | 41.97      | Average  | 54             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2390            | -47.9       | 2.98       | -                | 50.34      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2390            | -56.21      | 2.98       | 0.12             | 42.15      | Average  | 54             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.5          | -45.51      | 2.98       | -                | 52.73      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.5          | -55.09      | 2.98       | 0.12             | 43.27      | Average  | 54             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2484.047        | -39.33      | 2.98       | -                | 58.91      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.57         | -54.87      | 2.98       | 0.12             | 43.49      | Average  | 54             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2500            | -48.92      | 2.98       | -                | 49.32      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2500            | -57.68      | 2.98       | 0.12             | 40.68      | Average  | 54             | Pass    |
| NVNT      | n40  | 2422            | Ant1    | 2310            | -50.02      | 2.98       | -                | 48.22      | Peak     | 74             | Pass    |
| NVNT      | n40  | 2422            | Ant1    | 2310            | -58.19      | 2.98       | 0.24             | 40.29      | Average  | 54             | Pass    |
| NVNT      | n40  | 2422            | Ant1    | 2388.81         | -39.91      | 2.98       | -                | 58.33      | Peak     | 74             | Pass    |


|      |     |      |      |          |        |      |      |       |         |    |      |
|------|-----|------|------|----------|--------|------|------|-------|---------|----|------|
| NVNT | n40 | 2422 | Ant1 | 2389.662 | -55.88 | 2.98 | 0.24 | 42.60 | Average | 54 | Pass |
| NVNT | n40 | 2422 | Ant1 | 2390     | -47.13 | 2.98 | -    | 51.11 | Peak    | 74 | Pass |
| NVNT | n40 | 2422 | Ant1 | 2390     | -55.99 | 2.98 | 0.24 | 42.49 | Average | 54 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2483.5   | -43.22 | 2.98 | -    | 55.02 | Peak    | 74 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2483.5   | -54.54 | 2.98 | 0.24 | 43.94 | Average | 54 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2483.542 | -40.14 | 2.98 | -    | 58.10 | Peak    | 74 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2484.556 | -54.1  | 2.98 | 0.24 | 44.38 | Average | 54 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2500     | -50.27 | 2.98 | -    | 47.97 | Peak    | 74 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2500     | -57.61 | 2.98 | 0.24 | 40.87 | Average | 54 | Pass |

## Test Graphs

## Restrict Band NVNT b 2412MHz Ant1 Peak

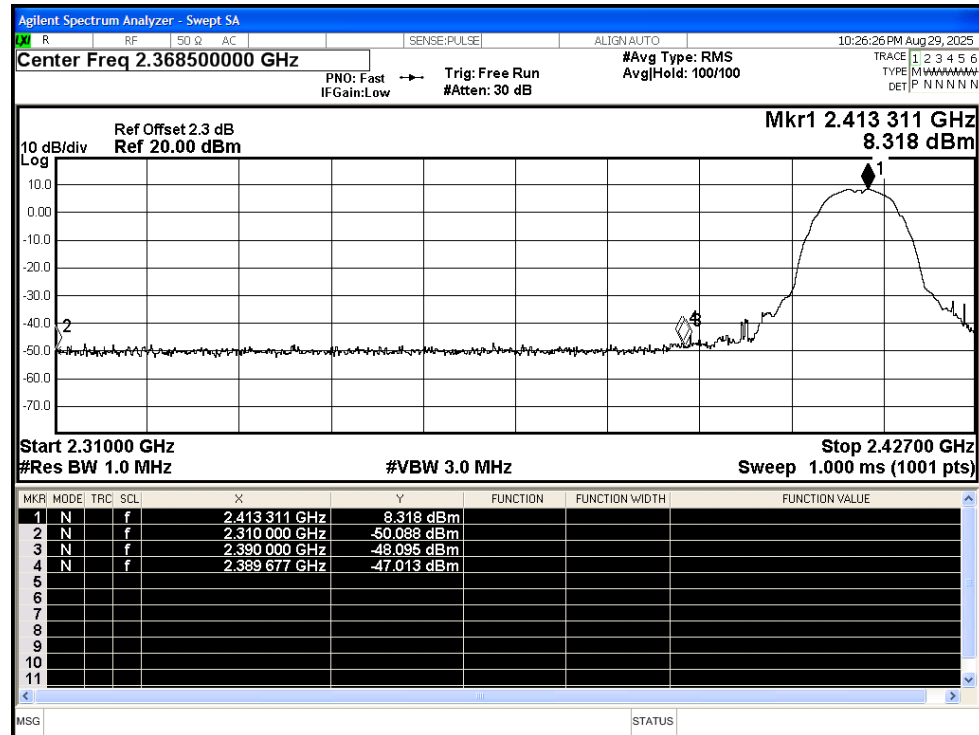


## Restrict Band NVNT b 2412MHz Ant1 Average

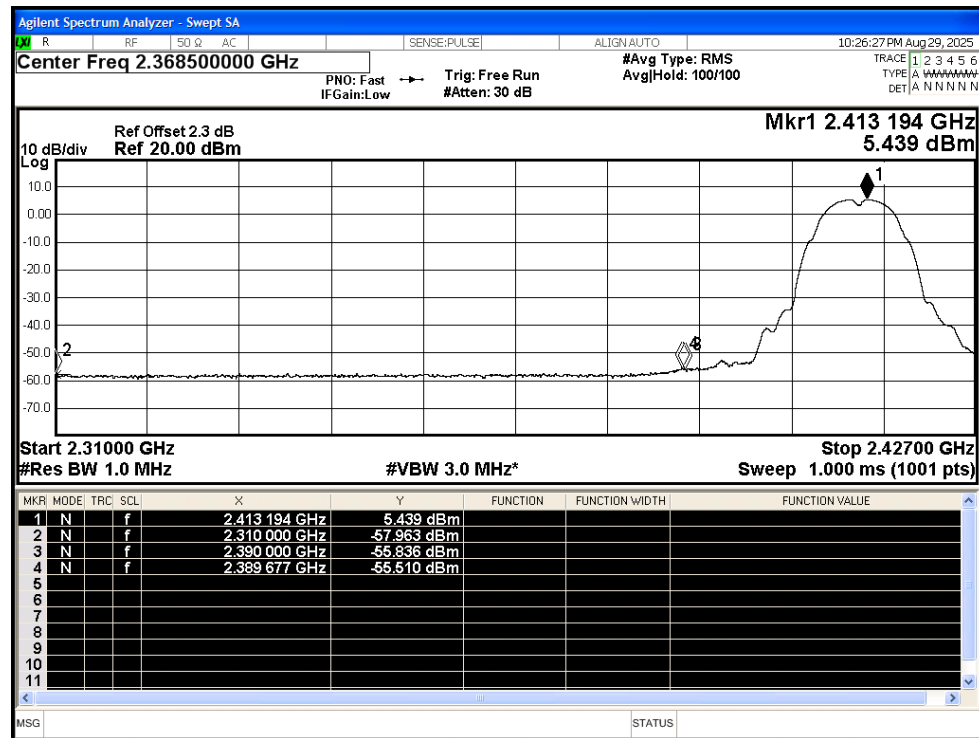





## Restrict Band NVNT b 2462MHz Ant1 Peak

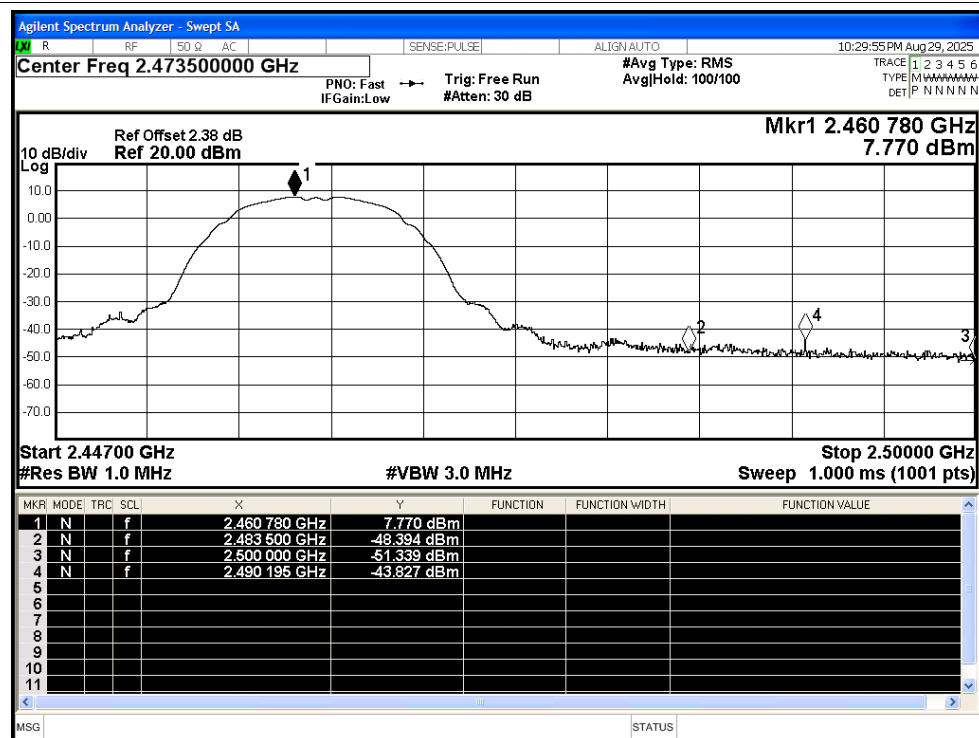


## Restrict Band NVNT b 2462MHz Ant1 Average

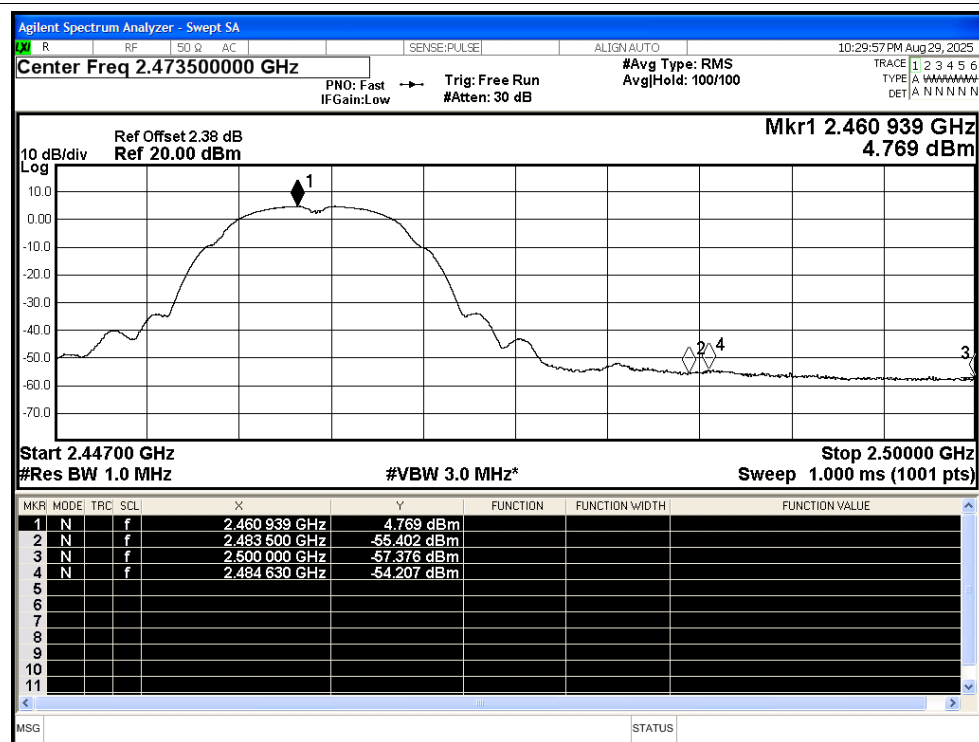


## Restrict Band NVNT g 2412MHz Ant1 Peak

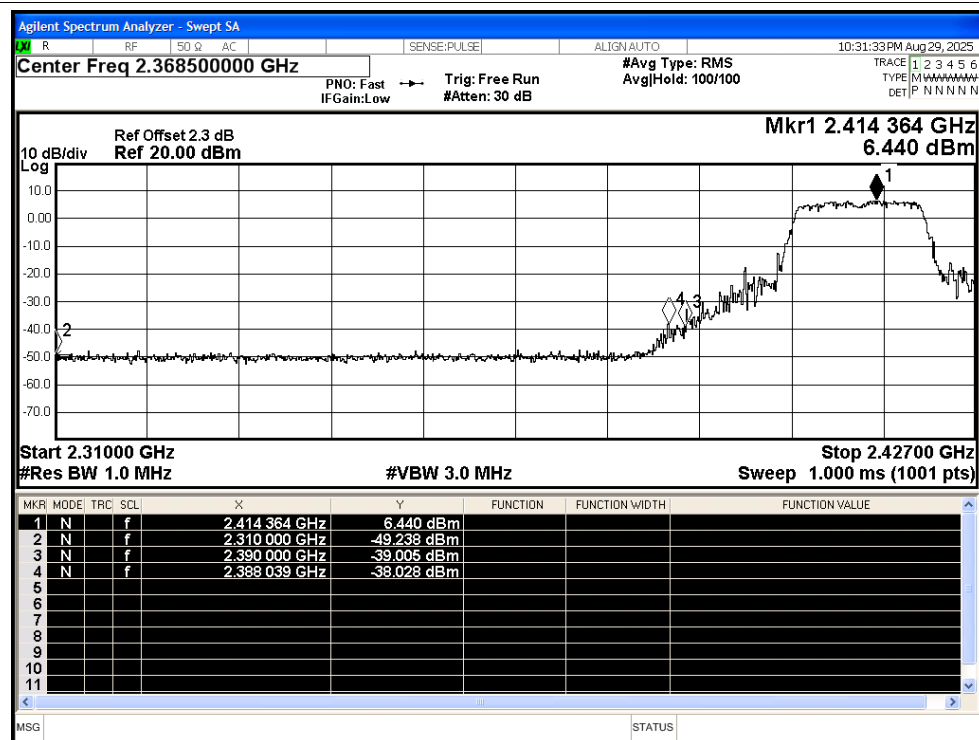


## Restrict Band NVNT g 2412MHz Ant1 Average

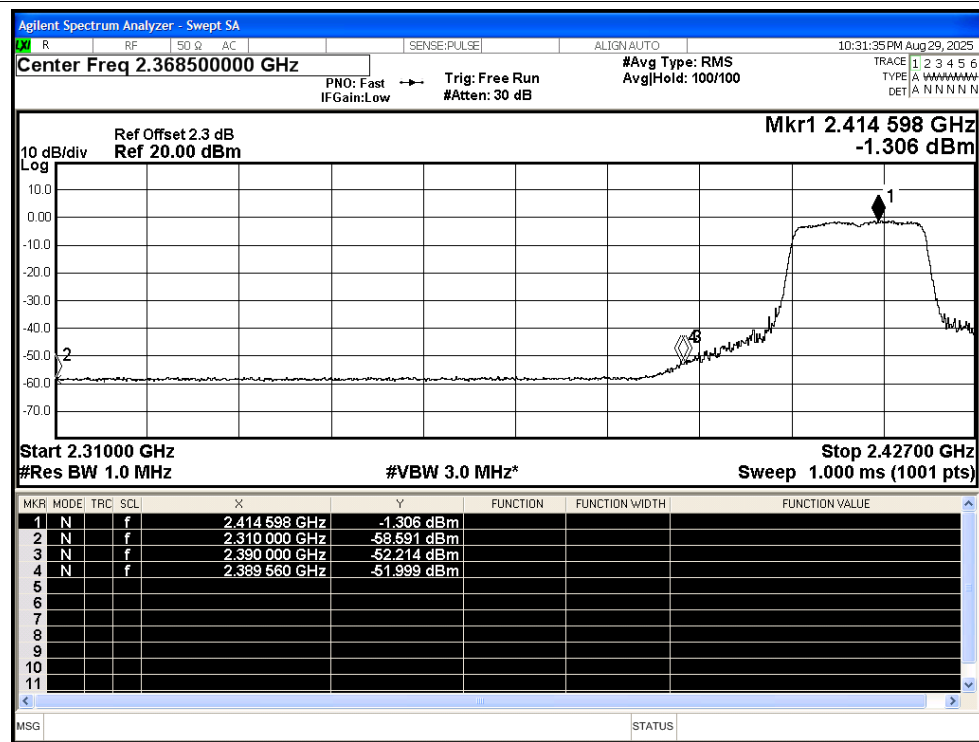


## Restrict Band NVNT g 2462MHz Ant1 Peak

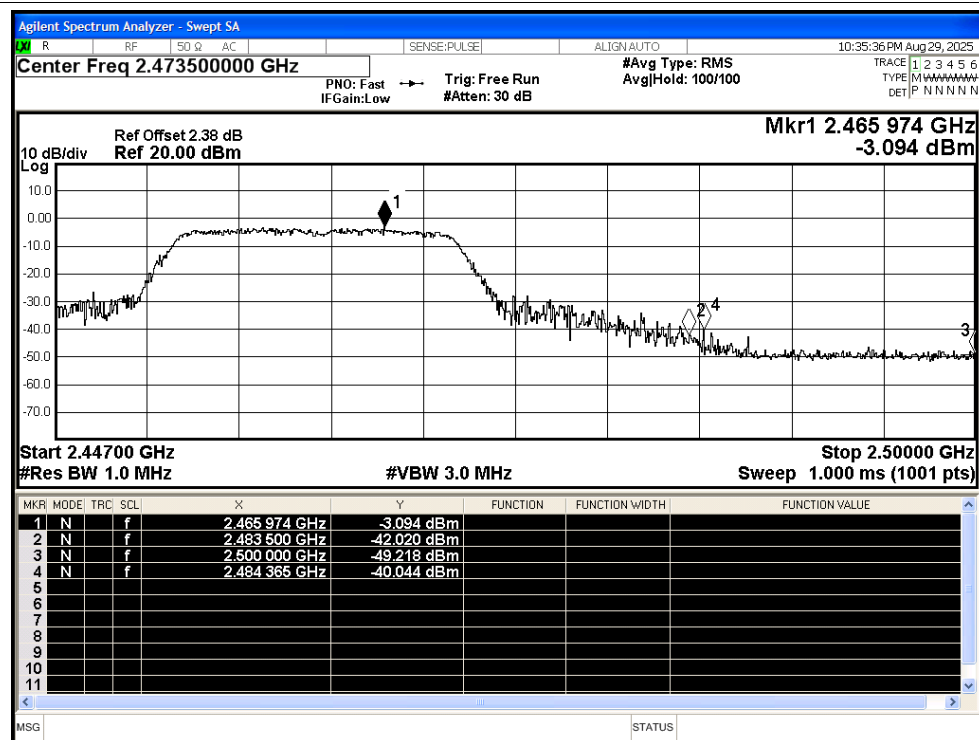


## Restrict Band NVNT g 2462MHz Ant1 Average

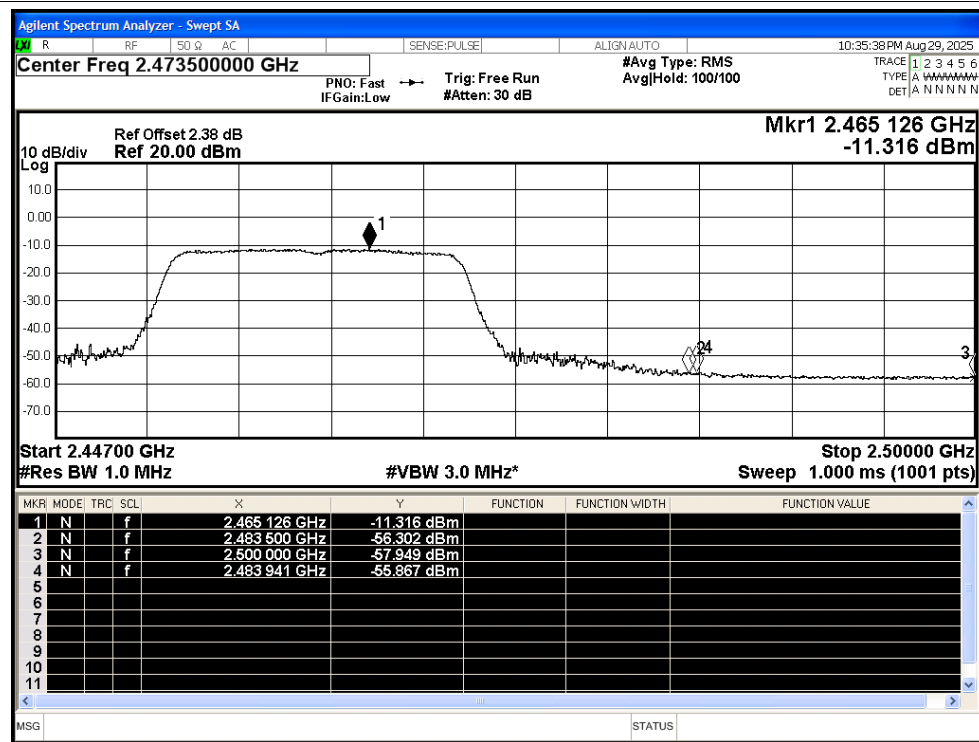


## Restrict Band NVNT n20 2412MHz Ant1 Peak

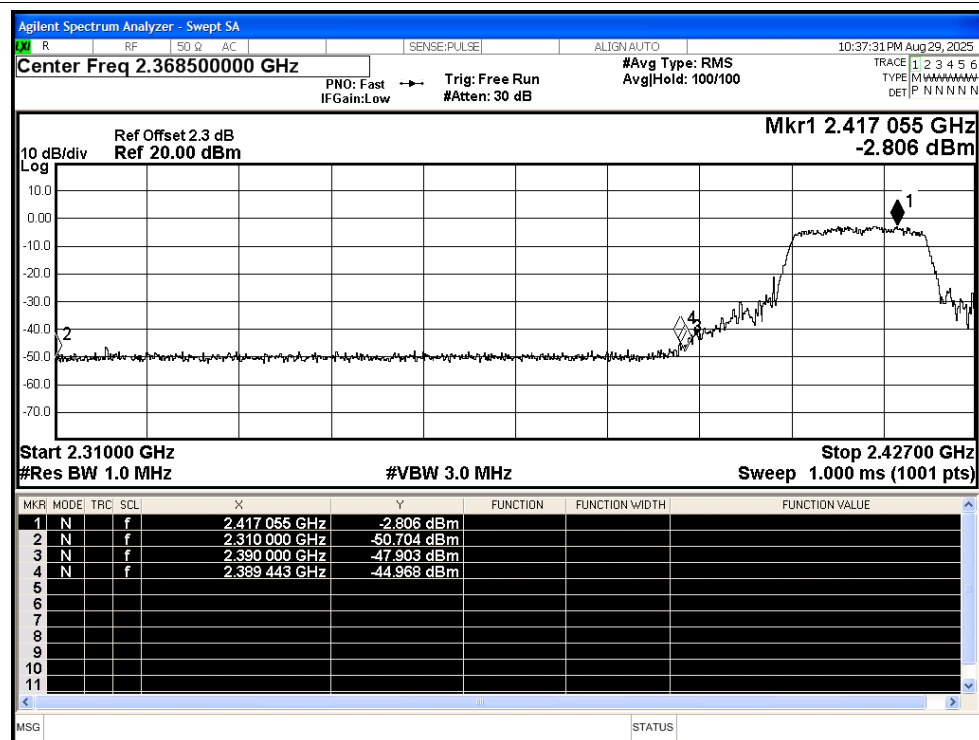


## Restrict Band NVNT n20 2412MHz Ant1 Average

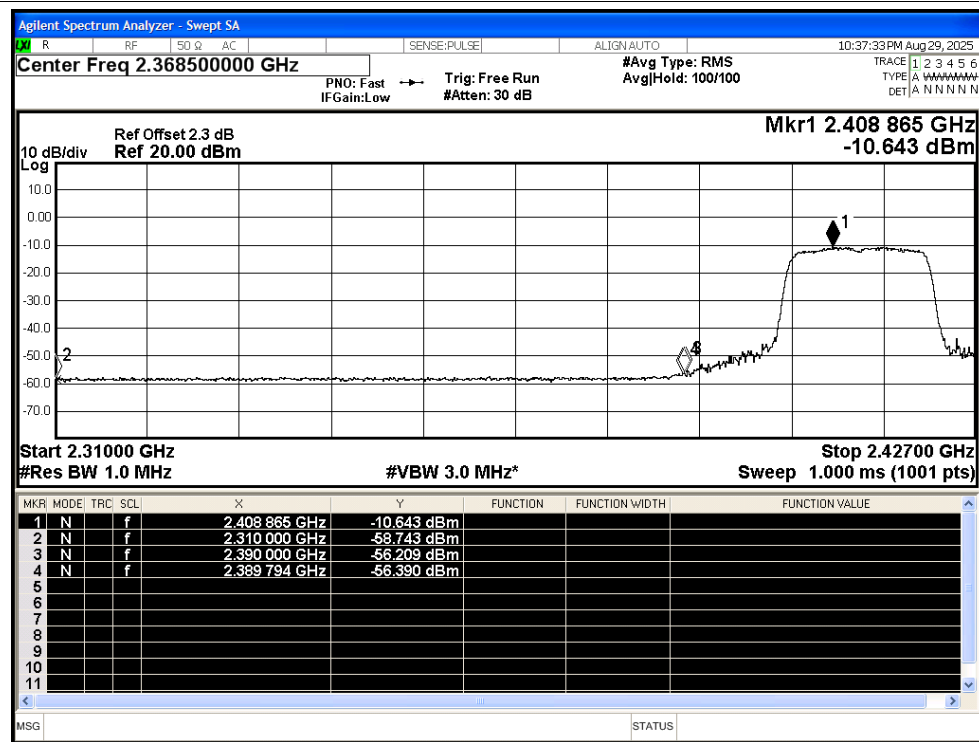


## Restrict Band NVNT n20 2462MHz Ant1 Peak

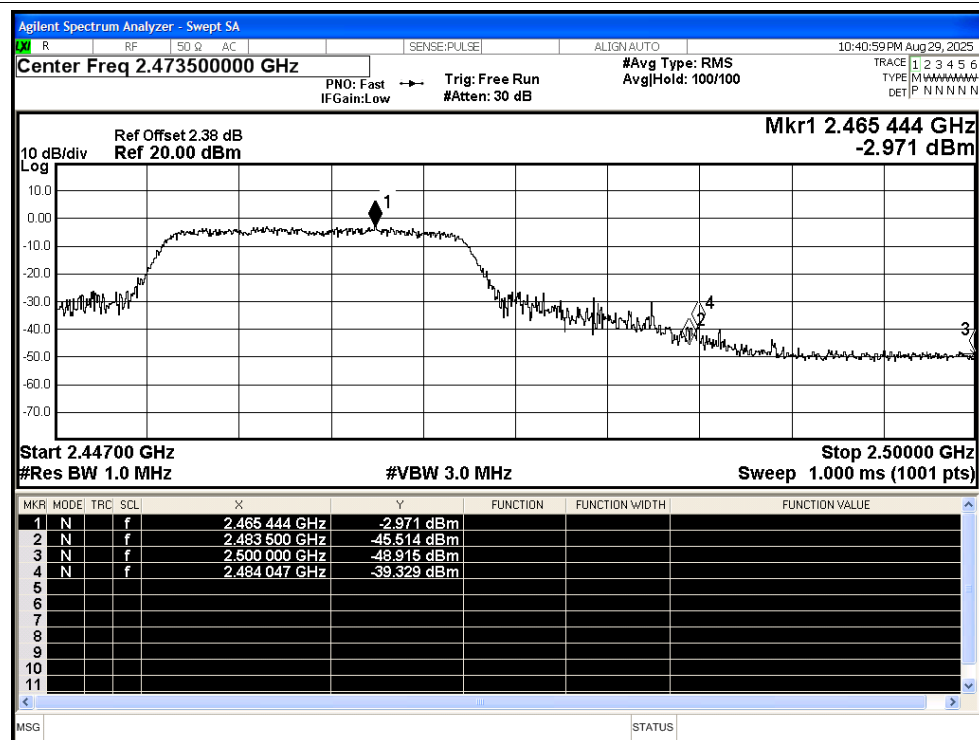


## Restrict Band NVNT n20 2462MHz Ant1 Average

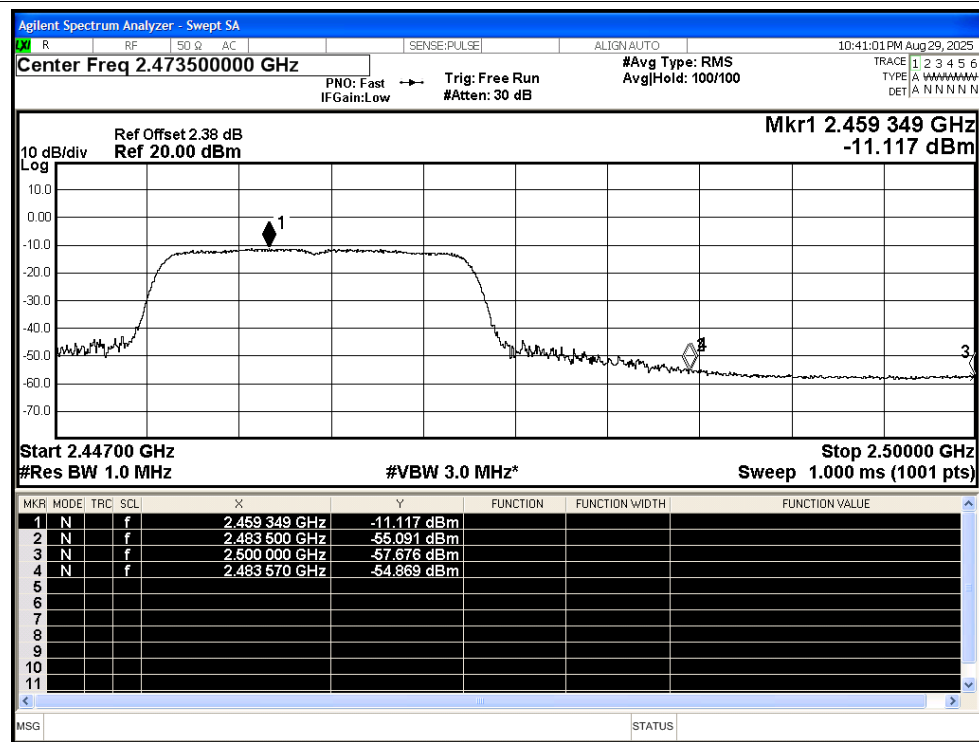


## Restrict Band NVNT n40 2422MHz Ant1 Peak

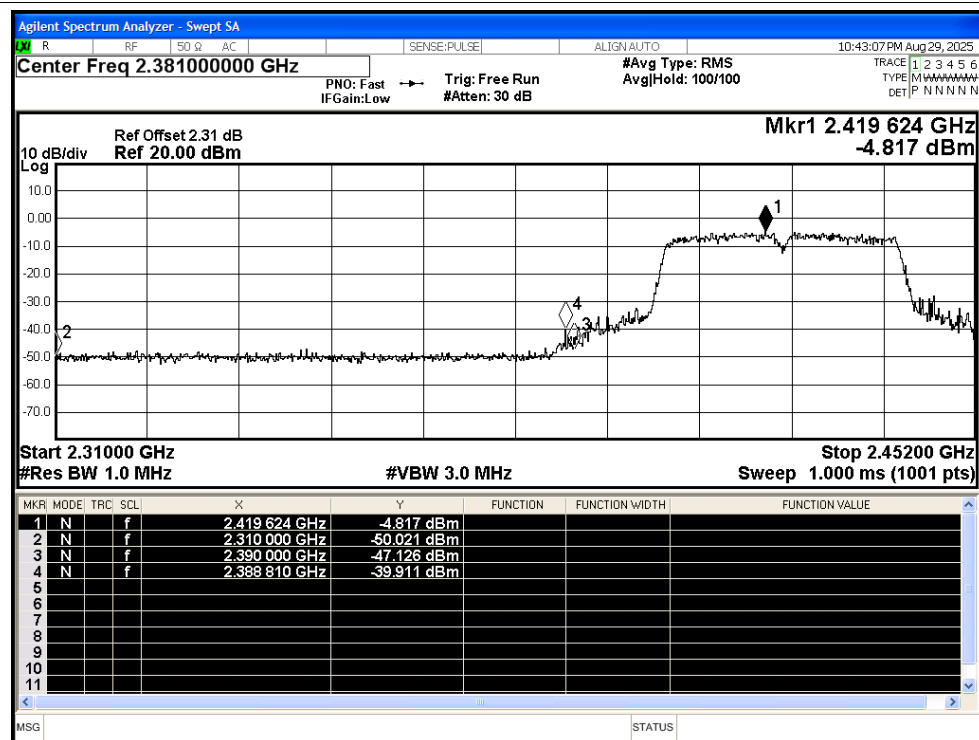

## Restrict Band NVNT n40 2422MHz Ant1 Average

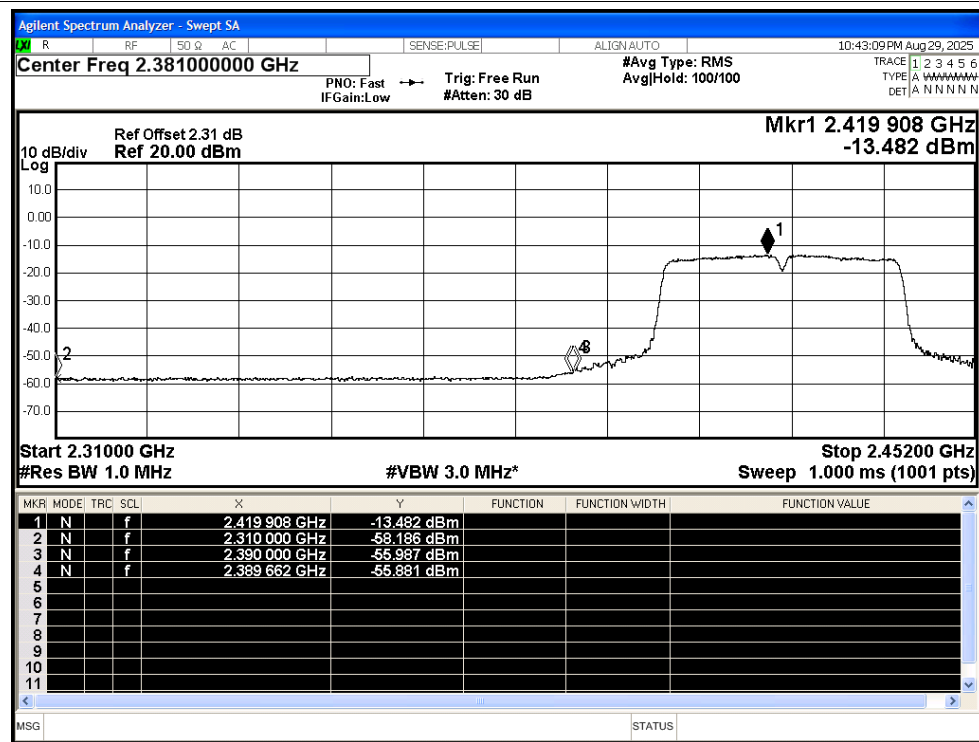

## Restrict Band NVNT n40 2452MHz Ant1 Peak

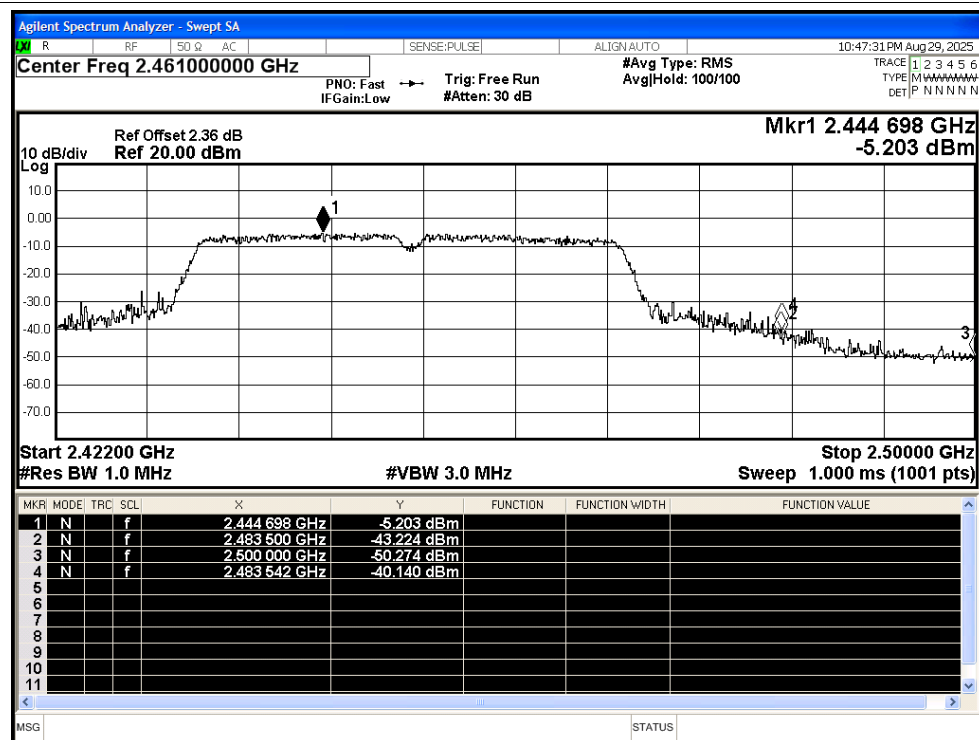

## Restrict Band NVNT n40 2452MHz Ant1 Average

