


Unit size: 140X100MM

Material: 120g

BT56 wireless headset

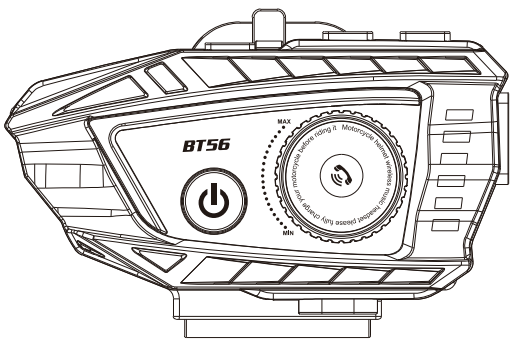

User Manual

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Product Overview:

BT56 features the latest 5.4 chipset, leveraging 5.4+EDR technology for exceptional signal transmission and ultra-low power consumption. It supports all wireless devices and has an automatic answer function.. When calls come in, there's no need to answer manually—safe and efficient. Equipped with a premium 40mm strong magnetic speaker, it delivers powerful stereo sound quality.

Powering On/Off:

Press the power symbol button “” for 2–3 seconds to power on. The indicator light will alternate between red and blue flashes, indicating the device is on. To power off, press the same button “” for 2–3 seconds, whereupon you'll hear an English voice prompt. After powering off, the light will no longer illuminate.

Connecting Two Phones Simultaneously:

After turning on the wireless headphones, connect them to phone A first. Then, turn off the wireless settings of phone A. Next, connect the headphones phone B. After the connection is successful, turn on the wireless settings of phone A again. Now, both phones will be connected at the same time

How to Connect to a Phone:

After turning on, the indicator light will alternate flashing red and blue. At this time, turn on the mobile phone's wireless switch and search for devices. Find “BT56” in the list, and after a few seconds of connection, it will be successfully paired. After pairing, when the mobile phone's switch and the headset are both turned on, the headset will automatically connect in subsequent use.

Volume Adjustment / Song Switch:

Turn the knob to the left to decrease the volume, and to the right to increase it. Press “” to play the previous track, and press “” to skip to the next track.

Answering Calls:

When a call comes in, the device will automatically answer after four ringtone sounds. Alternatively, press the “” button to answer the call.

Charging the Product:

The product will prompt with a voice message when the battery is low. It takes about 3 hours to fully charge. The red light will illuminate during charging and turn off once fully charged.


Product Specifications:

1. Chip version: V5.4+EDR
2. Frequency range: 2.4026GHz to 2.480GHz
3. Transmission distance: Beyond 10 meters
4. MIC range: Up to 1 meter
5. Lithium battery: 3.7V / 500 mAh
6. Charging time: 3 hours
7. Standby time: Approximately 80 hours
8. Continuous working time: Around 20 hours
9. wireless headset name: BT56

Package contents:



1. Wireless headphone one
2. One charging cable.
3. One user manual.
4. Two replacement Velcro strips.
5. One replacement microphone cover.

Compatible with the following wireless devices:

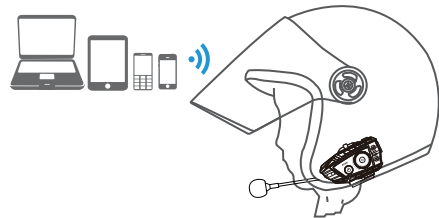

Device appearance and function introduction:



Figure 1

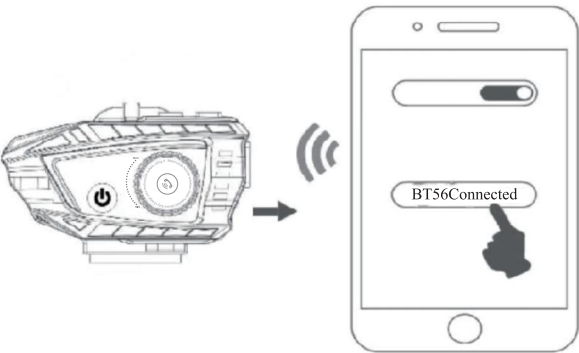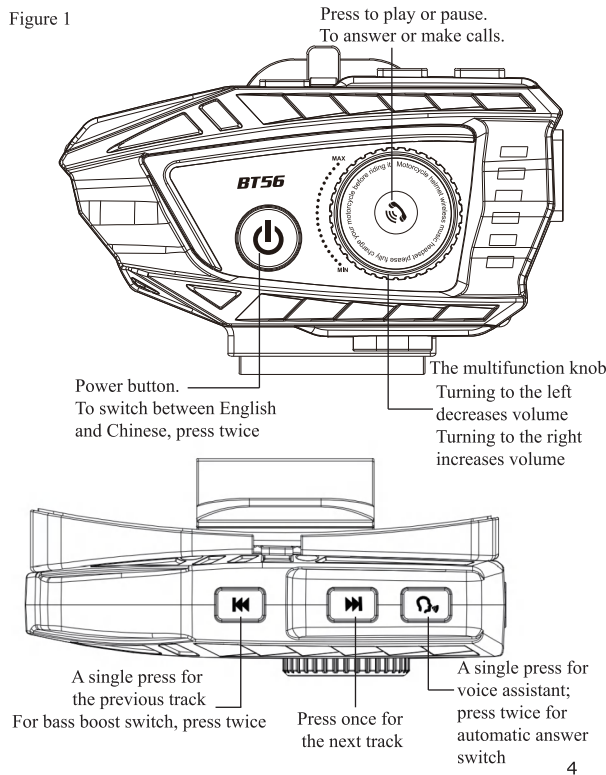

Applicable for the following helmets



Helmet installation instructions:

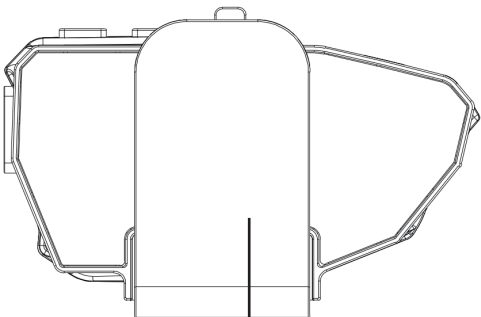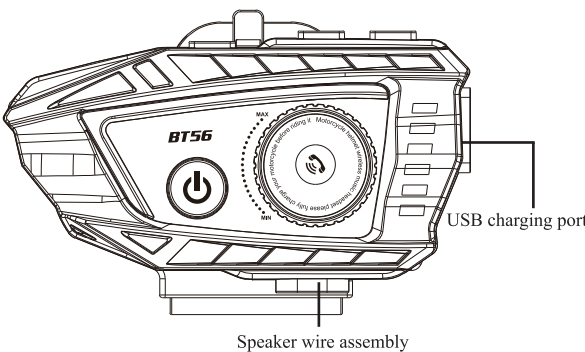

Insert the clip into the gap between the helmet liner and the outer shell



Use a hard object to push inside the round hole to remove the clip

Then, apply the hook-and-loop fastener



Attach the hook-and-loop fastener to the helme

Affix the main unit following direction of the arrow

The installation effect 2



The installation of left speaker:



Peel off white release paper from reserved round hook fastener



Peel off white release paper from reserved round hook fastener and attach to helmet's ear area.



Refer to left image for installation. Place speaker at ear position, and find suitable spot for microphone arm.


The installation of right speaker:



Peel off white release paper from reserved round hook fastener,



The reserved round hook-and-loop fastener, after peeling off the white release paper, can be affixed to the speaker at its determined position.

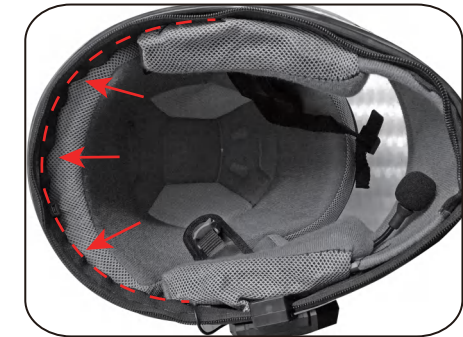

The left and right speaker connection wires are to be concealed within the inner lining.

Precautions for using the helmet Bluetooth headset:

1. To protect your eardrums and hearing, avoid setting the volume to its maximum level.
2. Refrain from listening to music continuously for extended periods.
3. Minimize the product's exposure to collisions.
4. Keep the product dustproof, fireproof, and moisture-proof.
5. When using outdoors, remember to fully charge it beforehand.

