

JYD-C10 Helmet Bluetooth Headset



User Manual

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Product Introduction:

JYD-C10 adopts the latest 5.4 Bluetooth chip, utilizing the most advanced Bluetooth technology, with strong stereo sound. It features super signal transmission, ultra-low power consumption, and support for all Bluetooth devices, with an automatic call-answering function, eliminating the need to manually answer calls, making it safe and fast. It employs a 40mm high-quality magnetic speaker.

1

Power On/Off:

Press the power button "  " for two to three seconds to power on, during which the indicator light will flash alternately in red and blue, indicating a powered-on state. To power off, press the power symbol button "  " for two to three seconds, a prompt tone will be heard, and the light will turn off.

How to Switch Between English and Chinese Voice

After powering on, the indicator light flashes alternately in red and blue. At this point, do not connect with a phone, press the "B" button twice consecutively to switch between Chinese and English voice.

Connecting Two Phones Simultaneously:

After turning on the Bluetooth headset, first connect with Phone A, then turn off Phone A's Bluetooth. After successfully connecting with Phone B, turn Phone A's Bluetooth back on to connect both phones simultaneously.

How to Connect with a Phone

After powering on, the indicator light flashes alternately in red and blue. At this point, turn on Bluetooth on the phone and search for Bluetooth devices. Find "JYD-C10" and click to connect; within a few seconds, it will connect successfully. After connecting once, it will automatically connect next time when both the phone's Bluetooth and the headset are on.

Volume Control/Song Switching

Long press the "  " button to play the previous track, long press "  " for the next track.

Press the "  " button to decrease the volume by one level

Press the "  " button to increase the volume by one level

Switching Automatic Call Answering On/Off

When music is paused, press the "A" button once, and upon hearing a "dong" sound, it indicates the switch is complete.

Activating the Night Ambient Light Effect

After turning on the product, double-press the "  " button to turn on the night ambient light. At this time, the ambient light will stay on, with each double press of the "  " button changing to a different ambient light effect, with a total of 6 color modes.

Answering Calls:

Calls will be answered automatically, or you can press the phone symbol "  " to answer manually.

Product Charging:

The product will voice prompt for charging when low on power. It takes 5-6 hours to fully charge. When charging, the red light illuminates, and it turns off when fully charged.

Package Contents:


1. One helmet Bluetooth headset.
2. One charging cable.
3. One user manual.
4. Two spare Velcro strips.
5. A spare microphone foam.
6. A pair of accessories and screws for installing a reinforced helmet.

3



Product Specifications:

1. Bluetooth Version: V5.4+EDR
2. Frequency Range: 2.402GHz-2.480GHz
3. Transmission Distance: Over 10 meters
4. MIC Distance: ≤ 1 meter
5. Lithium Battery: 3.7V/1000mA
6. Charging Time: 5-7 hours
7. Standby Time: Approximately 100 hours
8. Continuous Working Time: Approximately 30 hours
9. Bluetooth Name: JYD-C10

Device Functionality Overview:

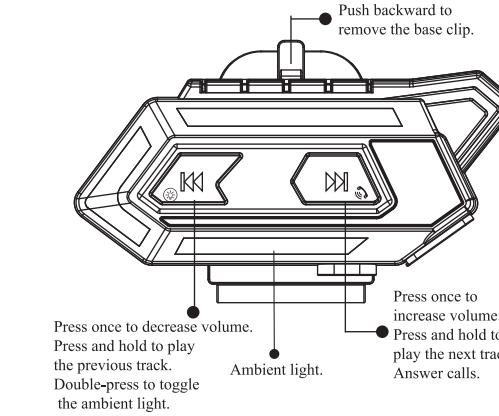

4

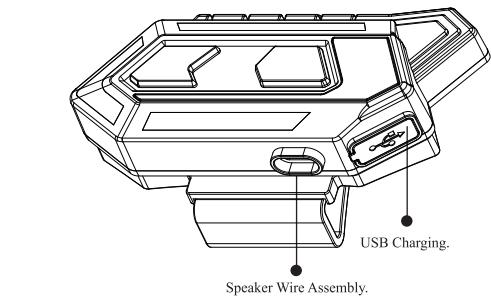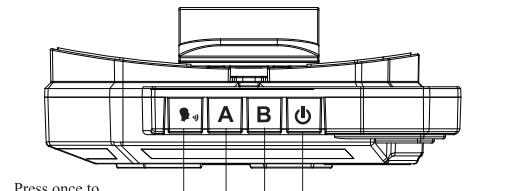

5

Compatible With the Following Products:



Suitable for the Following Helmets:



Bluetooth Pairing – Device Search:



Installing the Back Clip Base onto the Helmet

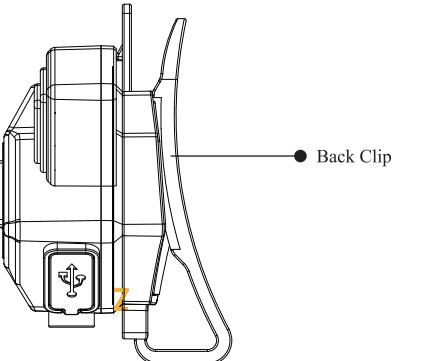


Figure 1:
Back Clip Installation



The back clip is inserted into the helmet's interior lining.

6

Installation Effect:



7



Left Speaker Installation:
Peel off the white release paper from the spare round loop-side Velcro.




Refer to the left diagram for installation. Attach the speaker to the ear position and adjust the mic boom to a suitable position.

8



Right Speaker Installation:
Peel off the white release paper from the spare round loop-side Velcro,




Peel off the white release paper from the spare round loop-side Velcro, then accurately position and attach the speaker.



The left and right speaker cables are concealed within the helmet's interior lining.

9

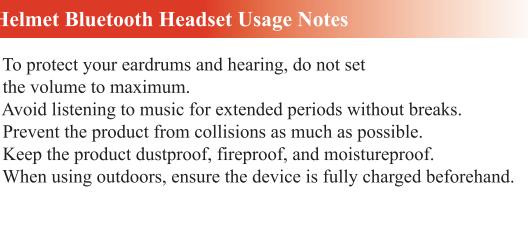

10



11