


JYD-C50 Wireless helmet headphones



User Manual

Figure 4:

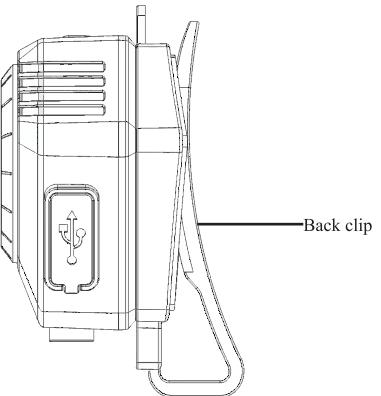

Installation of the back clip base to the helmet



6

7

Installation result:



8

Power On/Off:

Press and hold the power button for two to three seconds to power on. The indicator light will flash alternately in red and blue, indicating the headset is powered on. To power off, press and hold the power button for two to three seconds again. A prompt sound will play, and the light will turn off when the device is powered off.

Switching Between English and Chinese Voice:

After powering on, when the indicator light is flashing alternately in red and blue, do not connect to your phone. Press the button twice consecutively to switch between Chinese and English voice prompts.

Simultaneous Connection to Two Phones:

After powering on the JYD-C50 Bluetooth headset, first connect it to phone A. Then, turn off the Bluetooth on phone A. After successfully connecting to phone B, you can turn on the Bluetooth on phone A again, and the headset will be connected to both phones simultaneously.

How to connect to a phone:

After power on, the indicator light will alternate flashing red and blue. At this time, turn on the mobile phone wireless switch, search for wireless devices and select "JYD-C50". The connection will be established in a few seconds. After the connection is established, the next time you use the headset as long as the mobile phone wireless switch and the headset are both turned on, the headset will automatically connect to the mobile phone.

Volume control / Song skip:

Press the button once to decrease the volume by one level. Long press the button to skip to the previous song.

Press the button once to increase the volume by one level. Long press the button to skip to the next song.

1

2

Switching automatic answering on/off:

When music is paused, press the button twice. You will hear a "dong" sound, indicating that the setting has been switched.

Activating the night ambient lighting effect:

After powering on JYD-C50, pressing the "M" button can activate the night ambient light. At this point, the ambient light will stay on constantly, and each press of the "M" button will switch to a different ambient light effect. There are a total of four color modes.

Answering calls:

Incoming calls will be answered automatically, or you can manually answer by pressing the phone symbol .

Charging JYD-C50:

JYD-C50 will use a voice prompt to indicate low battery. Charging will take 5-6 hours to fully charge. The red light stays on while charging and turns off when fully charged.

Package contents:

1. A wireless helmet headphone.
2. One charging cable.
3. One user manual.
4. Two spare adhesive pads.
5. One spare microphone foam.
6. A pair of accessories and screws for installing the thicker helmet.


3

4


JYD-C50 Specifications:

1. Wireless version: V5.4+EDR
2. Frequency Range: 2.402GHz - 2.480GHz
3. Transmission Range: Over 10 meters
4. MIC Range: ≤1 meter
5. Lithium Battery: 3.7V/1000mA
6. Charging Time: 3 hours
7. Standby Time: Approximately 100 hours
8. Continuous working time: Approximately 25 hours
9. Connection Name: JYD-C50


JYD-C50 Appearance and Function Introduction:

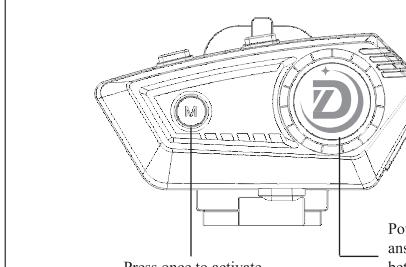

Press once to activate the ambient light effect.
Power on/off, play/pause, answer calls, redial, switch between English and Chinese voice prompts.

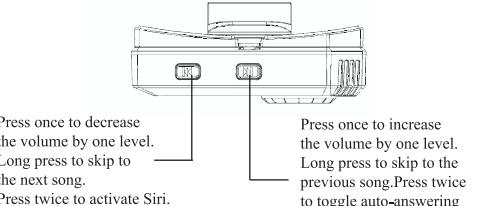

Press once to decrease the volume by one level.
Press once to increase the volume by one level.
Long press to skip to the next song.
Long press to skip to the previous song.
Press twice to activate Siri.



Speaker wire assembly
Charging via USB

Wireless pairing and search device:



Can be used with the following products:



Suitable for the following helmets:



Precautions for Using JYD-C50 Helmet Bluetooth Headset

1. To protect your eardrums and hearing, do not set the volume to maximum.
2. Avoid listening to music continuously for extended periods.
3. Minimize collision to protect JYD-C50.
4. Ensure dust-proofing, fire prevention, and moisture resistance.
5. Remember to fully charge JYD-C50 before outdoor use.



11