




USER MANUAL

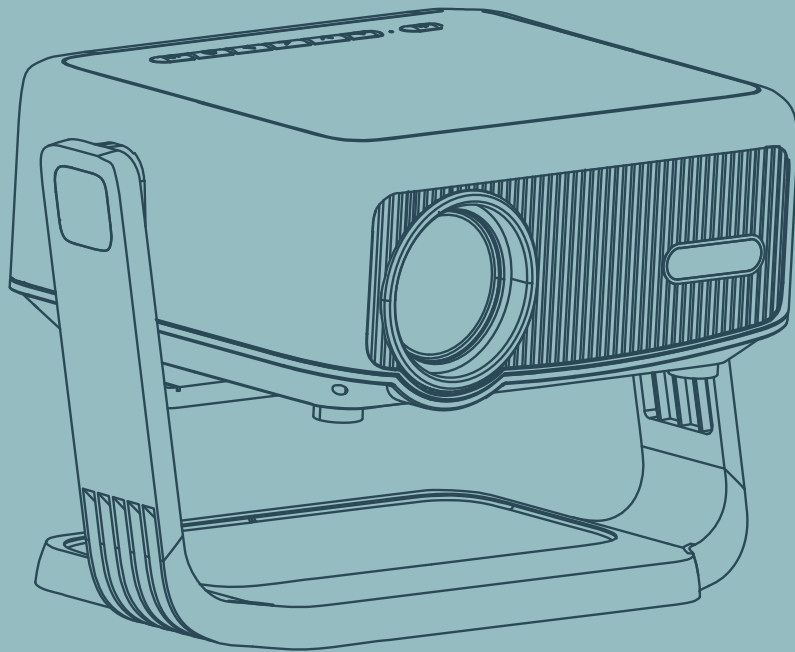

L02 MINI VIDEO PROJECTOR

Where Quality Meets Innovation

✉ Support_us@lisowod.com

✉ Support@lisowod.com

✉ Support_jp@lisowod.com

🌐 <https://lisowod.com>

☎ US: (971) 337-8504(Phone&Text)



W240408



EN 001~033



JP 034~057

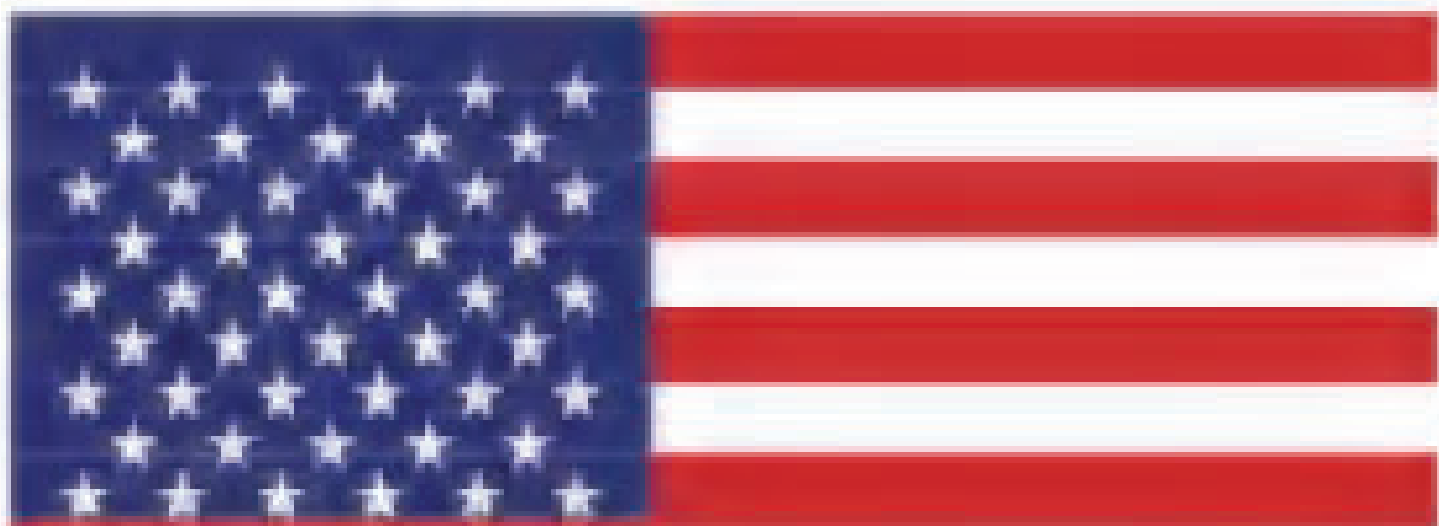

CONTENTS

CONTACT US	001
TROUBLESHOOTING	002
PACKING LIST	004
FUNCTION OVERVIEW	005
REMOTE CONTROL	007
INPUT SOURCE	008
WIRELESS CONNECTION METHOD	009
-Wireless projection.....	009
-Bluetooth connection.....	012
PROJECTOR IMAGE SETTINGS	014
-Zoom Function.....	014
-Keystone Correction.....	015
-Electric-focus.....	016
INSTALLATION.....	017
SETTING MENU	019
PROJECTOR SPECIFICATIONS.....	023

We continuously improve our products.
Images and descriptions in the manual are for reference
only and may differ from the actual products.
Please refer to the actual products for accuracy.
You can get the latest version through online upgrades.
Thank you for your understanding.



Activate Your 3-year Warranty and Exclusive Surprise

Ladies and Gentlemen

Thank you for purchasing **L02** Projector. Please take 1 minute to scan the code and activate your **3 year warranty**.



It is recommended to complete the process within **3 days**.

Tips: If you find that you cannot activate your warranty by scanning the code, you can contact us via the email below, and we will help you activate your warranty for you.

✉ US: Support_us@lisowod.com

✉ EU: Support@lisowod.com

✉ JP: Support_jp@lisowod.com

🌐 <https://lisowod.com>

☎ US: (971) 337-8504 (Phone/Text)

WE ARE

constantly optimizing and upgrading our products, the pictures and descriptions in the manual are for reference only may differ from the actual product, please refer to the actual product. You can get the latest version through online upgrade. Thank you for your understanding. Product warranty and support are provided if products have been purchased from our authorized seller. In order to protect your rights, you can also send an email to LISOWOD official email **US: Support_us@lisowod.com** **EU: Support@lisowod.com** to verify the authenticity of your L02.

Our High qualified and responsible customer service team is waiting to hear from you and answer any of your questions **24/7**.

We are happy to receive your message about the problems you met so that we can help you to get out of the trouble. We are even happier to hear your praise about our wonderful projector and to see the happy moments our projector have brought to your life!

The fastest and most efficient way to contact us?

Method 1- Via email & phone:

US: Support_us@lisowod.com

US: (971) 337-8504 (Phone/Text)

EU: Support@lisowod.com


JP: Support_jp@lisowod.com

Method 2:

Your Orders > The order has a problem > Choose a topic from list displayed > Select Contact seller

Please come. Please~~~

<https://lisowod.com>

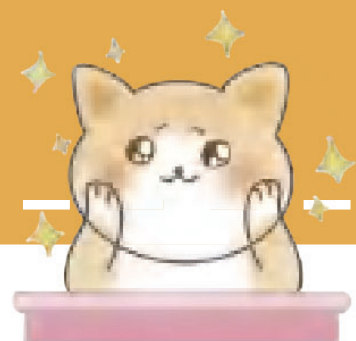

CONTACT US

Thank you very much for supporting Lisowod! Hope our products and services bring you a pleasant journey of audio-visual enjoyment.

Lisowod promises a 3-Year Warranty and Lifetime Technical Support, please

do not worry when encountering any problems. **Any buyer with any questions who comes to contact us will have our promise to get a satisfactory solution + an Extra 6-Month Warranty to thanks for your support!**

By the way, we are racking our brains to develop a new projector. If you have any ideas about projector, such as user experience, parameters, features,


colors and appearance, we warmly invite you to tell us in detail.

We value all voices, and you won't imagine how much we look forward to your ideas. **Once your idea is adopted, as a thank you, I will apply to send one to you for FREE as the first tester when the new product is developed.**

Looking forward to your messages!

Onoayo Support Team

Scan QR code below, start chatting with us!!!



US:WhatsApp

Scan this code, learn how to operate the projector visually on YouTube!!!



LISOWOD

US: Support_us@lisowod.com



EU: Support@lisowod.com



Official website: <https://lisowod.com>



US: (971) 337-8504 (Phone/Text)



TROUBLE SHOOTING

Our high-qualified customer services team is waiting to hear from you and answer any of your questions 24 hours a day and 7 days a week. We are happy to receive your message about the problems you met so that we can help you to get out of the trouble. You can contact us through email:

US: Support_us@lisowod.com

EU: Support@lisowod.com

Q: Where can I find the instructional videos on how to set up the projector?

A: We have prepared detailed operation videos on YouTube, which contains almost every step of operating the projector, like wifi connection, wired connection and so on. Just search "Lisowod" on YouTube and you will find it.

Q: I received the projector but it has no remote control. Could you send it to me?

A: If the product you receive is missing any accessories, please let us know what accessory do you miss. We will send them to you as soon as possible.- Just contact us via our e-mail:

US:Support_us@lisowod.com/EU: Support@lisowod.com

Q: I can't find the focus ring on the projector,how can I adjust the focus?

A: This mini projector support electric-focus with remote control,just need to press the "F+"&"F-" on the remote.Note: Projector and screen/wall must be in effective distance.

Q: The remote control is unresponsive.

A: ① Make sure remote points at IR receiver directly.

② Do not cover IR receiver.

③ Make sure you have put the battery in,this remote control does not come with batteries.

Q: My projector and smartphone are connected to the same WiFi, but when I want to do screen mirroring, the projector's name is not detected.

A: ① Please initialise the projector and reconnect it to your smartphone.

② Please disconnect from the connected network and enter the password again to connect.

③ Try connecting the smartphone and the projector to the Internet once using a hotspot.

If the above methods do not solve the problem, please contact the customer service.

Q: I can't play Netflix video on the projector, why?

A: There are quite a few video platforms like Netflix, Disney+ and Hulu are under HDCP copyright protection, and thus do not support being displayed on a projector, this is the same situation for all projectors. You would need a TV stick to enjoy these video platforms.

Q: Up Side Down Images.

A: Enter [Set], then enter [projector setting] to flip the projection image.


Q: I contact the customer service team as suggested, but has not received any reply. Why?

A: We promise that we will reply to all the emails within 24 hours. If you haven't received any reply from us more than one day, then maybe our email has been blocked or has gone to the spam email box. Please send us email again or contact us by Whatsapp or Facebook.


Q: Hello,could you tell me what the size of the mounting screw is at the bottom of the projector? I am struggling to find a stand.

A: The size of the mounting screw 1/4 inch, approx. 6.35mm diameter.

PACKING LIST

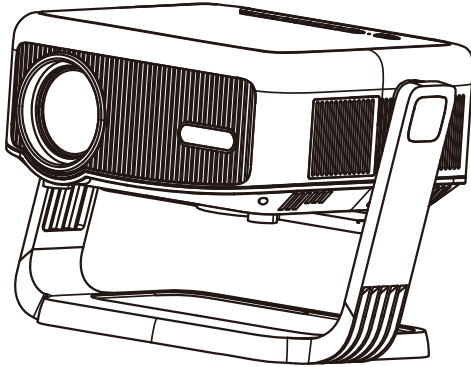


L02

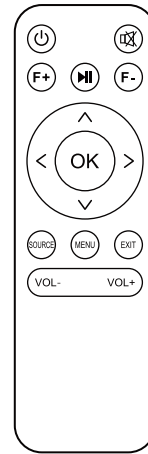


Remote



User Manual




HD Cable




Power Cable

NOTICE

Recommended

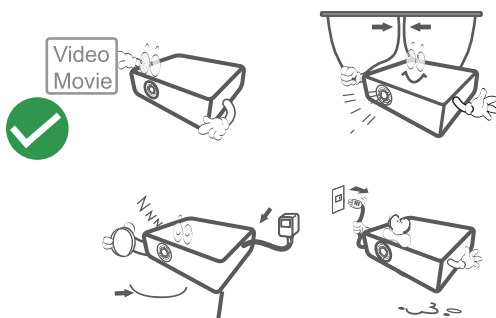


Not Recommended

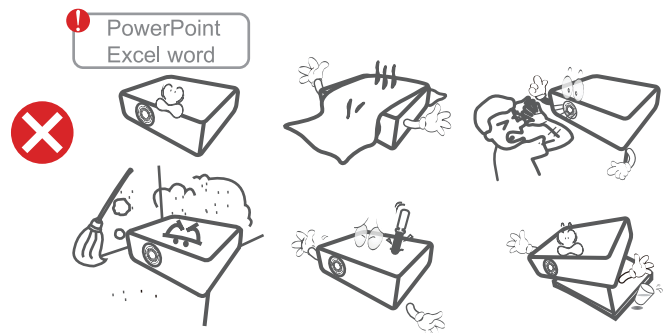


FUNCTION OVERVIEW


Top View

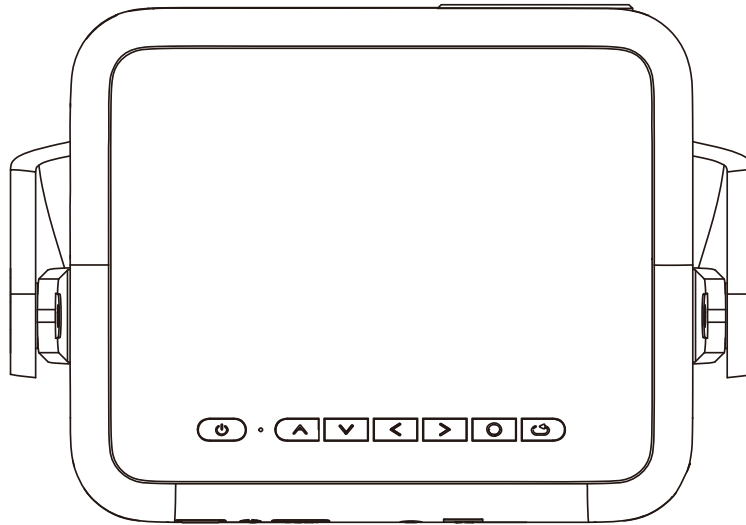


Button illustrate

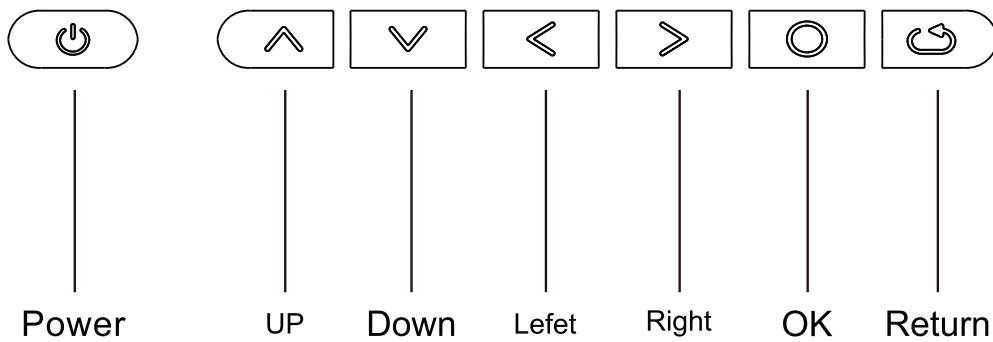


Front View

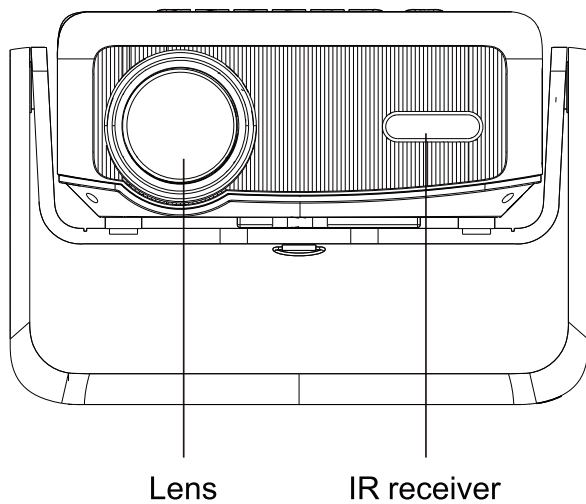

Rear View

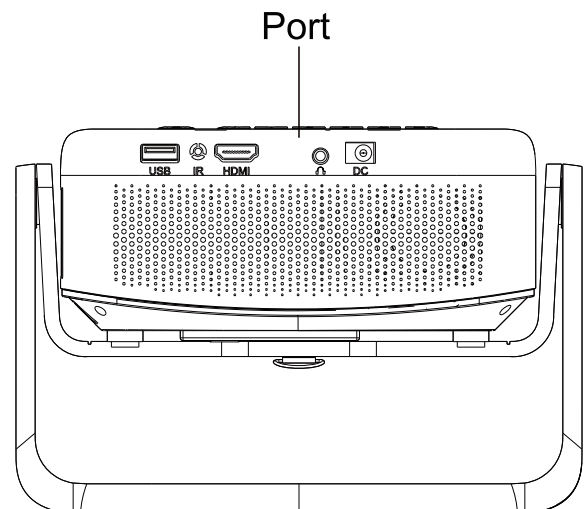


REMOTE CONTROL

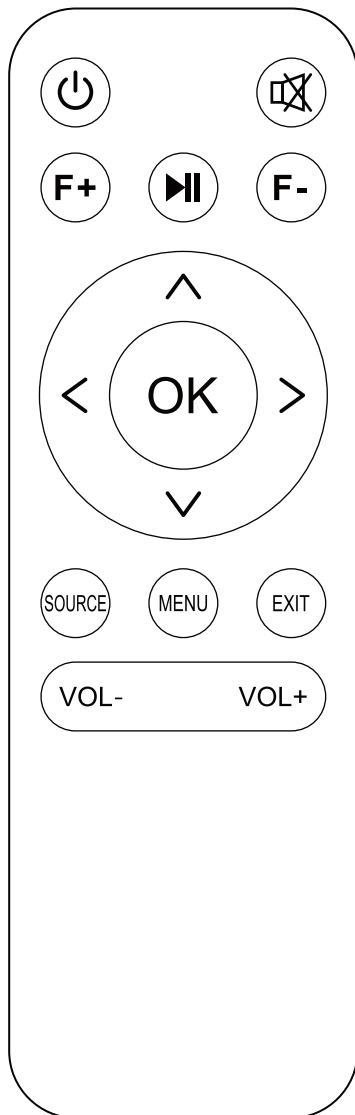**Power button:**

Turn on/off

**Mute button:**

Mute

**Focus button:**

Adjust focal distance

**Signal source button:**

Choose to enter the Application Center, HDMI

**Exit button:**


return to last step

**Source button:**

enter the setting page

**Home button:**

short press and return to the homepage

**Direction Buttons:**

^ Up v Down
< Left > Right
● OK

**Volume button:**


Volume-, Volume+

Installation of the remote control

1. Install 2 pieces of AAA batteries into the remote before using it. Do not combine new batteries with old ones in a remote controller, which can cause operation failure due to insufficient power supply.
2. When using the remote controller, please make sure that the signal transmitter of the remote controller aims at the infrared signal receiver of the projector.



INPUT SOURCE

Press on this button  on the projector remote to enter the interface of input source.

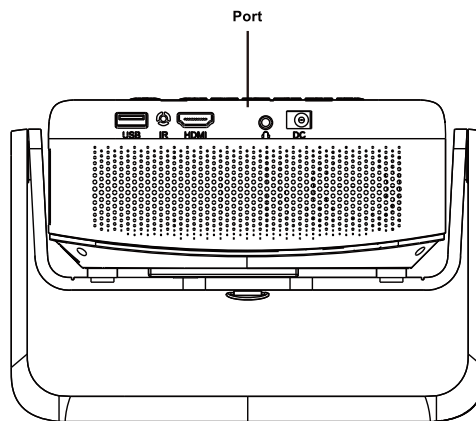



HDMI Connection

When the HDMI cable is plugged in, presse the button  on the remote and select the [HDMI] mode, then select [HDMI] from the homepage to play the video.

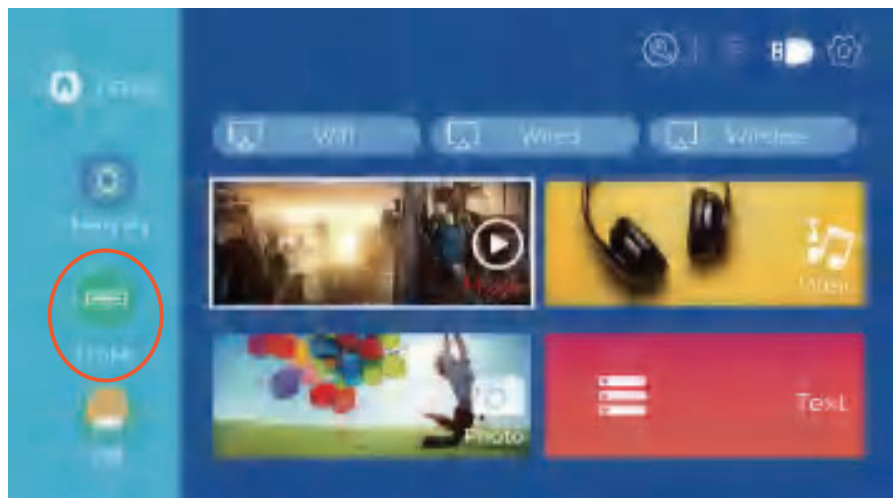


USB Connection

When the U disk is plugged in, and entering the Media, you can play any document in your USB disk.

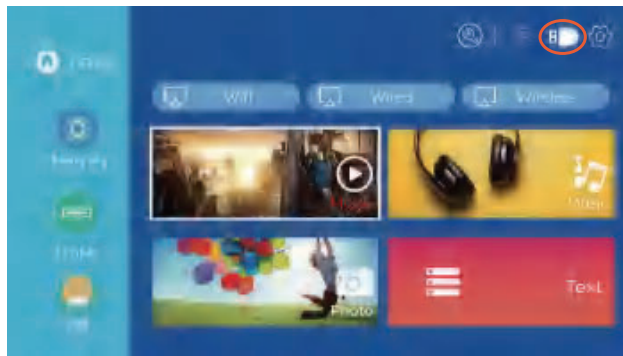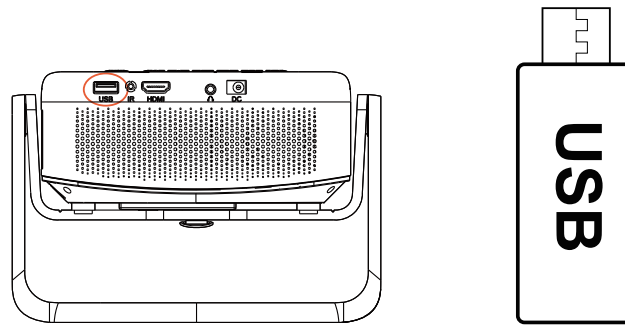

Speaker/Headphones Connection

Directly connect the wired speaker and your headphones/earphones to the Audio Out port on the projector with a 3.5mm audio cable.

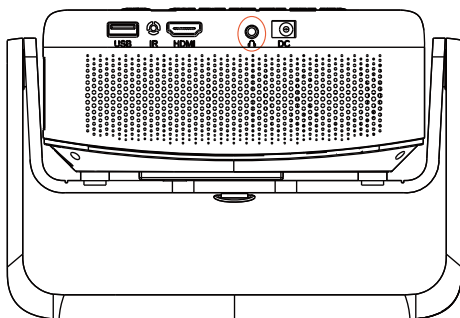

WIRELESS CONNECTION METHOD

Warming Tips:

- ① The fluency of screen mirroring with wireless connection will be affected by the network environment. A bandwidth of 100Mbit or more is recommended when using screen mirroring.
- ② Make sure your mobile device is close to the projector when using wireless connection. A distance within 1 meter is recommended.
- ③ Some mobile devices may not support screen mirroring due to the compatibility.
- ④ Any questions, please feel free to email LISOWOD via

US: Support_us@lisowod.com

US: (971) 337-8504 (Phone/Text)


EU: Support@lisowod.com

JP: Support_jp@lisowod.com

Wireless projection



Step 1 : Connect Projector to your Home WiFi

Go to set page -- Select the [WIFI] Select your home WiFi from the list -- Connect the projector to your home WiFi.

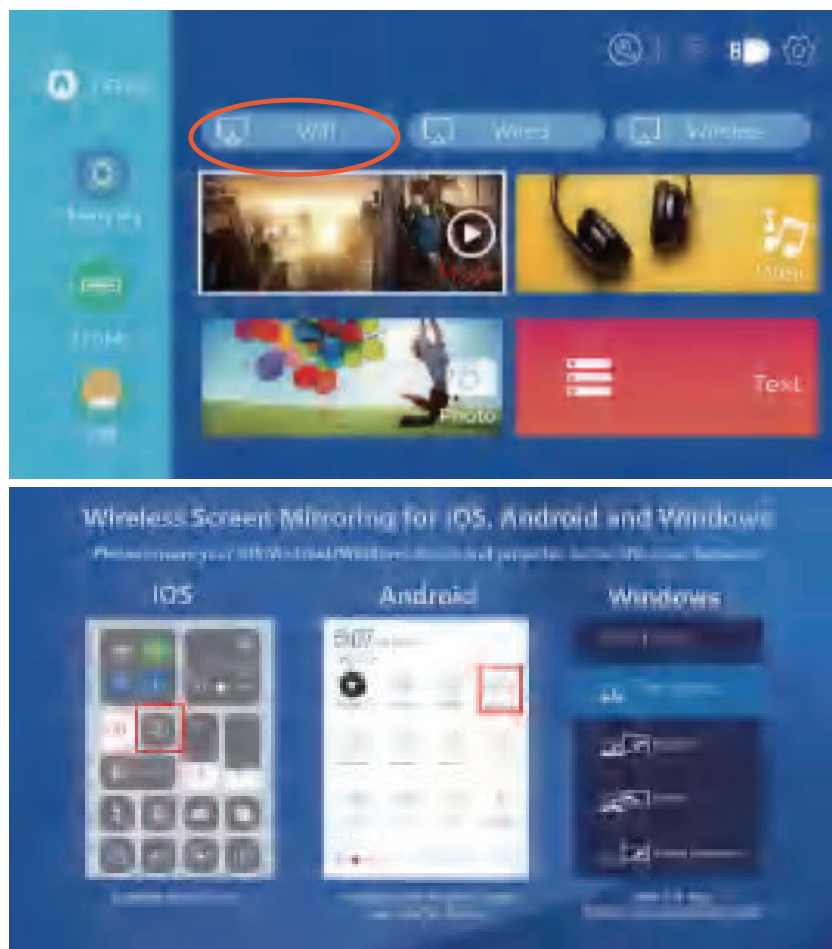


For wireless Devices:


Go to Home page-- Select the [wireless]- - Follow the steps as the picture, and open your device's projection page--Select your device from the list --Connect the projector with your device.

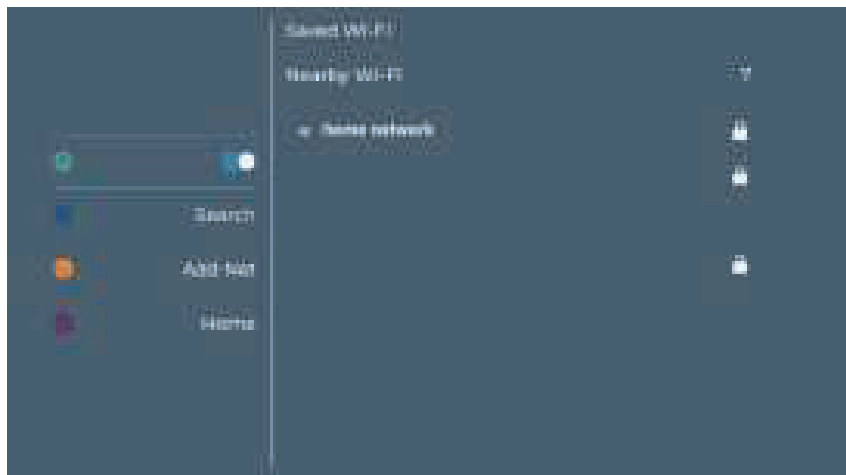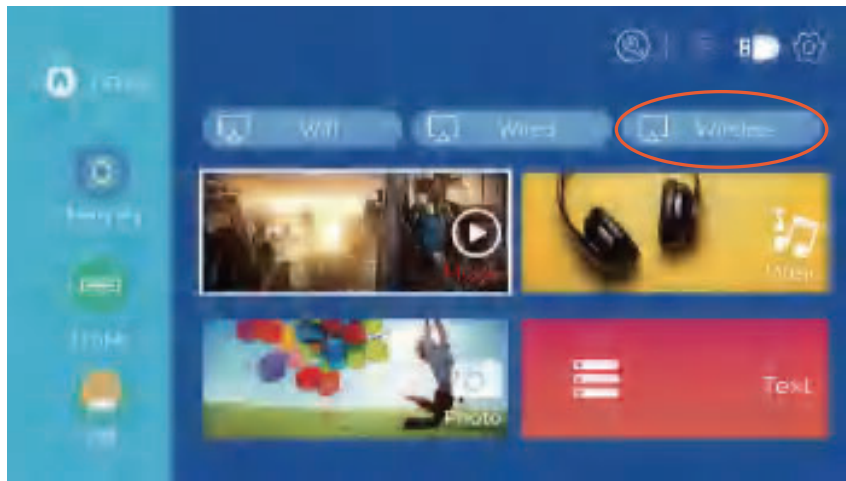

For Cable device

Go to Homepage of the projector and select [Wired] to enter the screen mirroring interface, and follow the step.

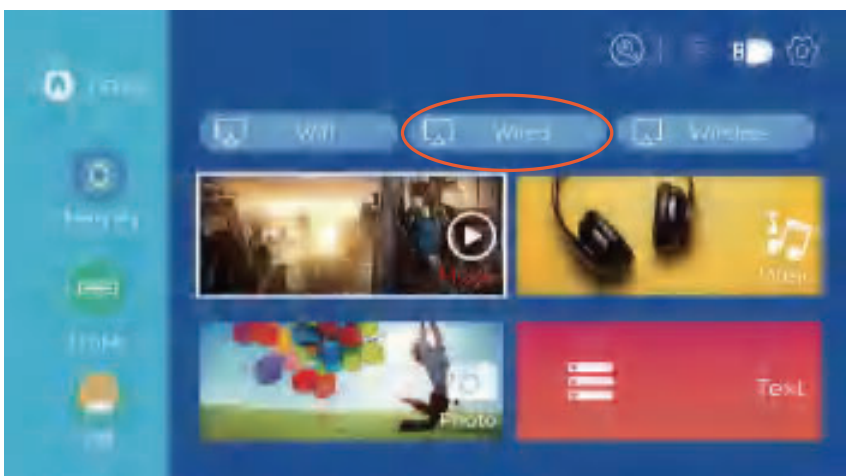

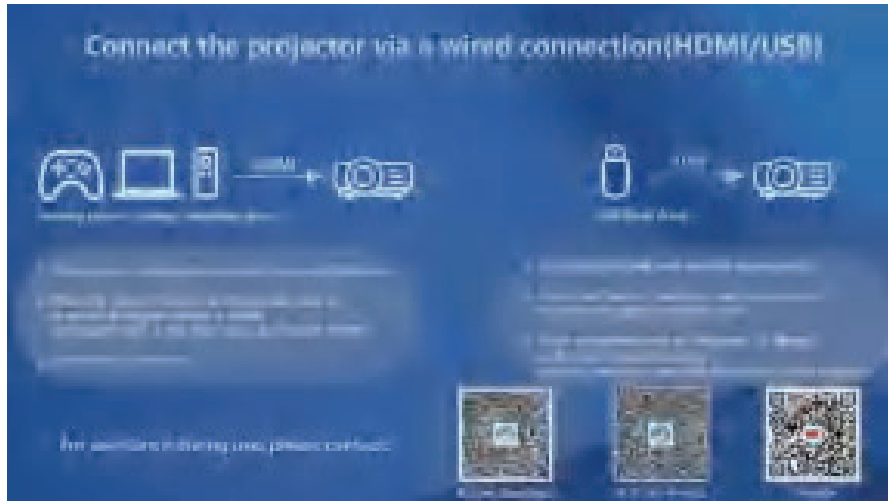

For APP Screen Cast


Step1: Please keep your device and projector on the same network.

Step2: Go to Homepage of the projector and select [Wireless] to enter the screen mirroring interface.

Step3: Open the screen projection app


Step4: Find the "Screen Cast" or "Wirelss Projection"button

Step5: Then select the device name that appears on the projector screen from the searching list.

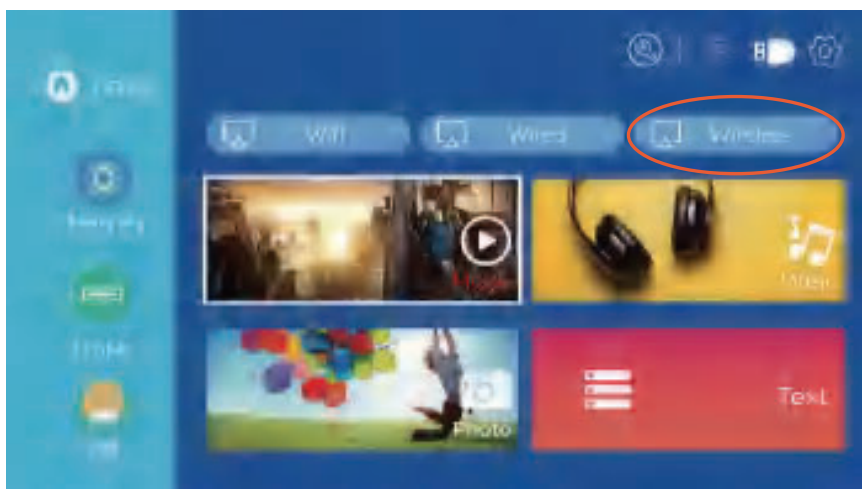


Bluetooth connection

Go to the home page, click the " Set " to go to the Setting page. Choose the logo of [BT] to enter the BT function.

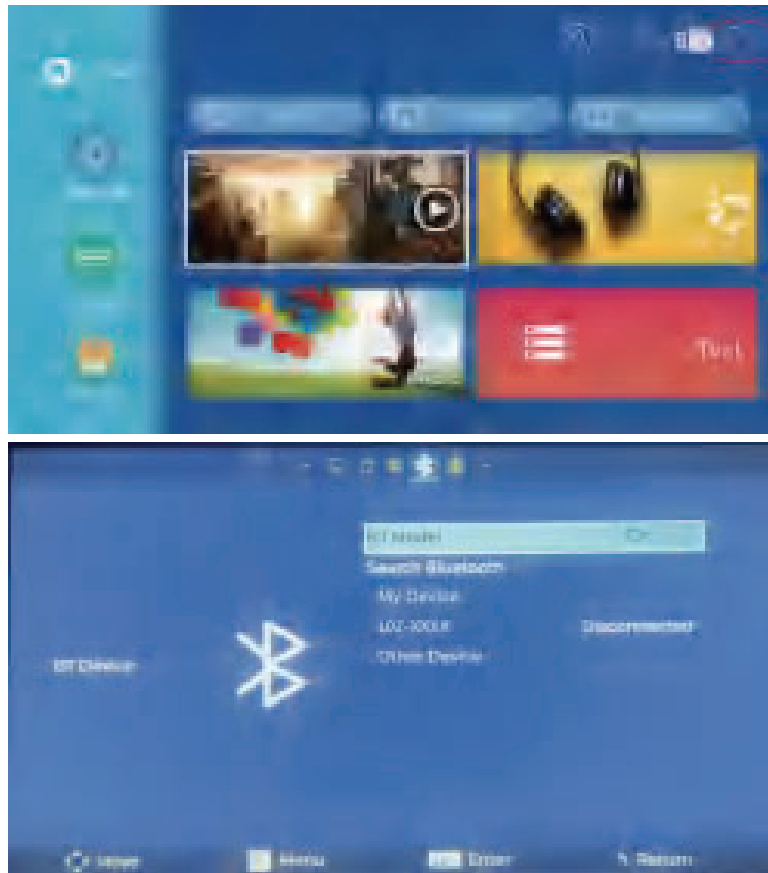


1.Connect the projector to an external Bluetooth speaker.

In BT setting page, select Bt mode "on", press OK button to open BT, then select "Search Bluetooth" button to scan available devices. and then select "Search Bluetooth" button to scan for available devices. Select the correct Bluetooth device name and press OK button to pair.

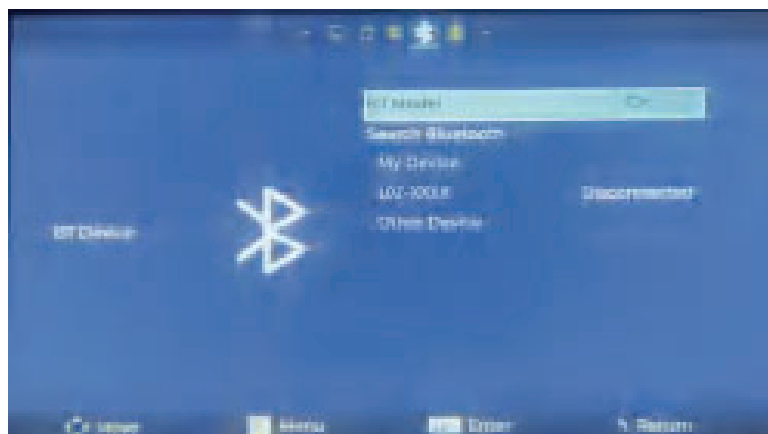

2.Connect your phone to the projector using Bluetooth.

On the Bluetooth settings page, Choose the Bt reception mode and wait on this page. Then use your phone to search and scan for available devices, Choose the right Bluetooth device name, Press OK button to pair.

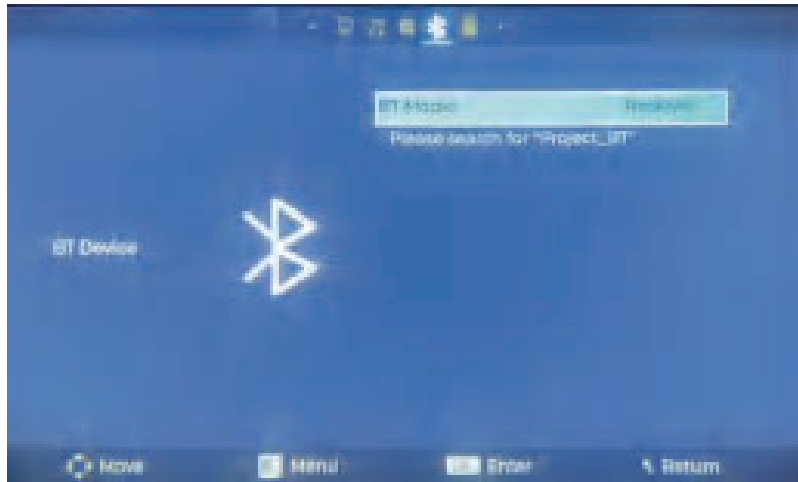

3.Cannot connect Bluetooth speaker?

When the Bluetooth speaker is connected to the projector, it will show up in paired devices ,it means that the projector has been successfully connected.If it shows pairing failed, it means that the Bluetooth speaker has not been connected to the projector.

Please try the following methods:

Method 1: Please click the [UNPAIR] , then connect your BT again.

Method 2: Operate on the projector to turn off Bluetooth (press the "OK" button on the remote control).

Then turn on BT (the "OK" button on the remote control). Reconnect the Bluetooth speaker again.



Method 3: Turn off the projector and restart it, then reconnect the Bluetooth speaker.

Method 4: Restore the factory settings and then reconnect the Bluetooth speakers.

PROJECTOR IMAGE SETTING

Zoom Funtion

Find the settings icon on the main page, click it to enter the settings list, and find the "Flip" option to set the projection mode. Click the "Windows zoom" option to adjust the zoom ratio, supports 100%-70% zoom.

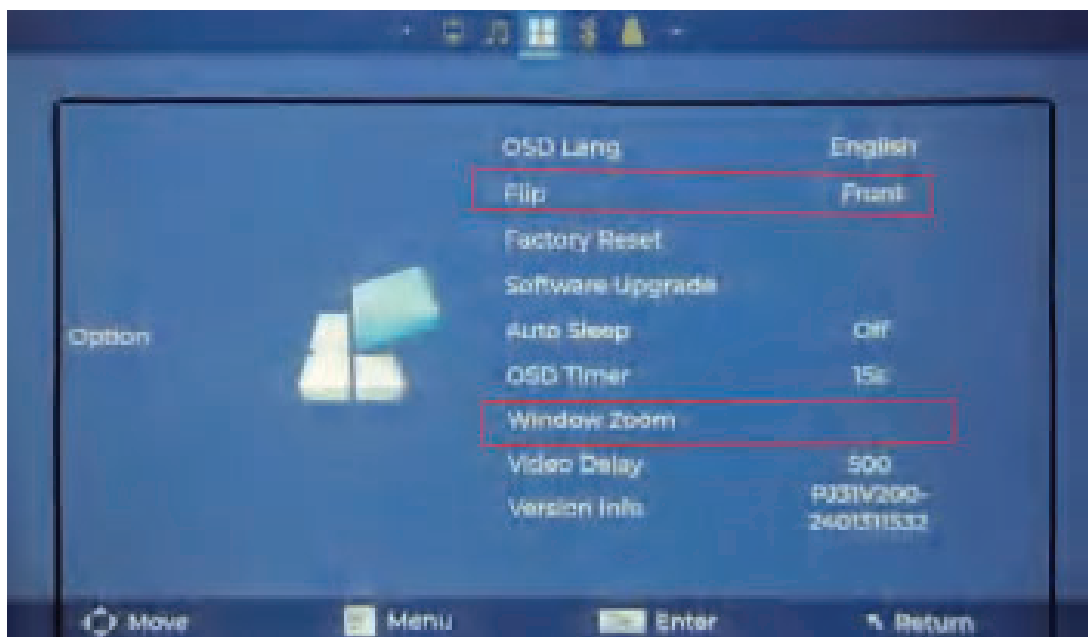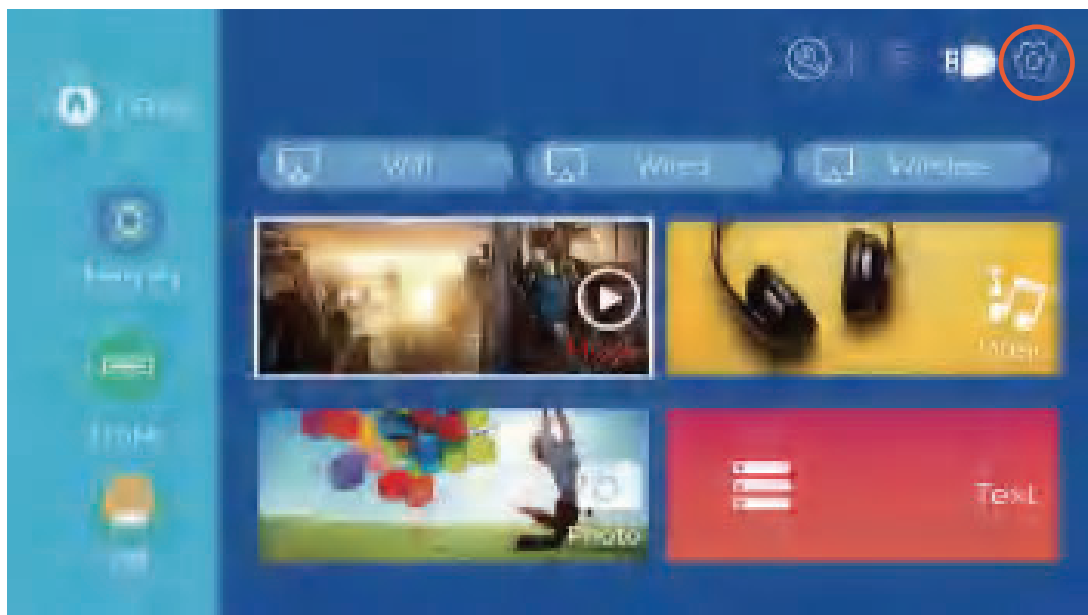

Keystone Correction

Auto & Manual Vertical Keystone Correction & Electric-focus



Find the settings icon on the main page, click it to enter the settings list then you can see every option.



>>Auto Vertical Keystone Correction

For auto vertical keystone correction, simply keep the interface "Vertical automatic correction " in the "on" state, and the projector will automatically correct the image distortion.

>>Manual $\pm 30^\circ$ Vertical Keystone Correction

If you prefer manual keystone correction, you can disable the automatic feature . After that,the "Manual adjustment" will shows "on" state then you can adjust the keystone correction degree by using the left and right buttons on the remote control.

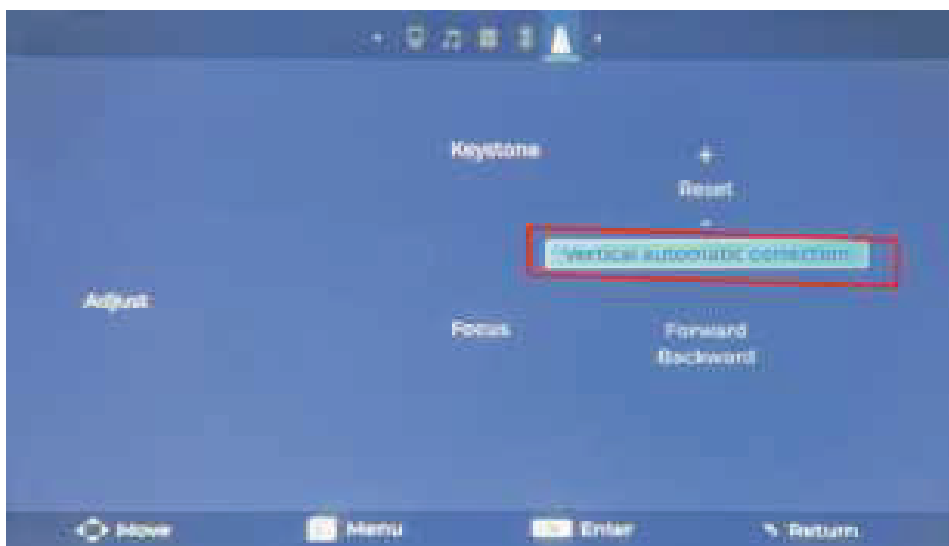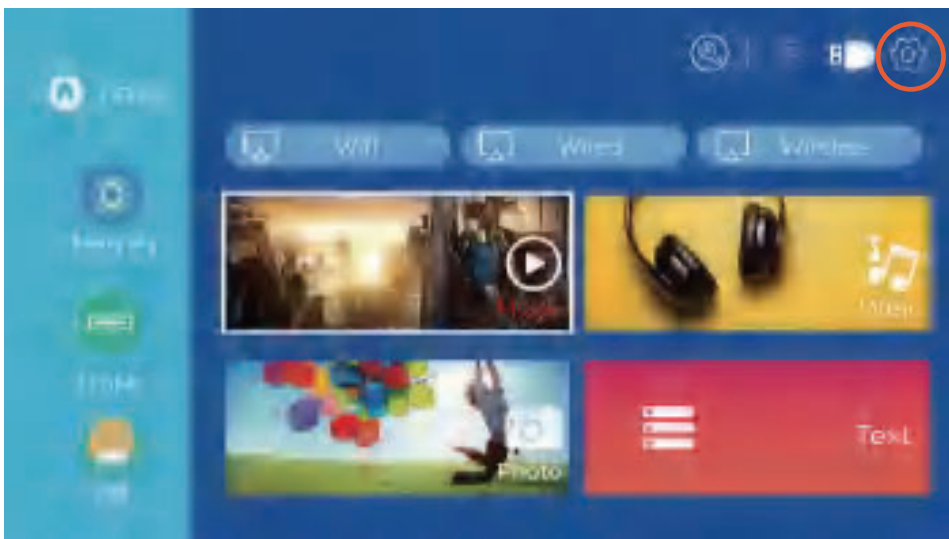

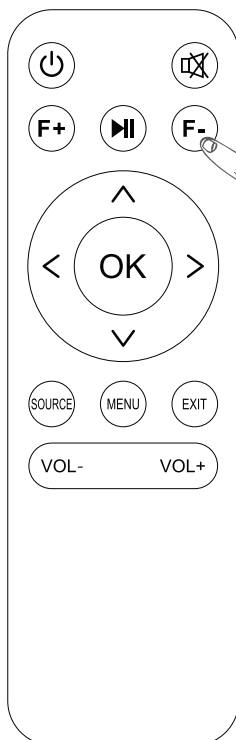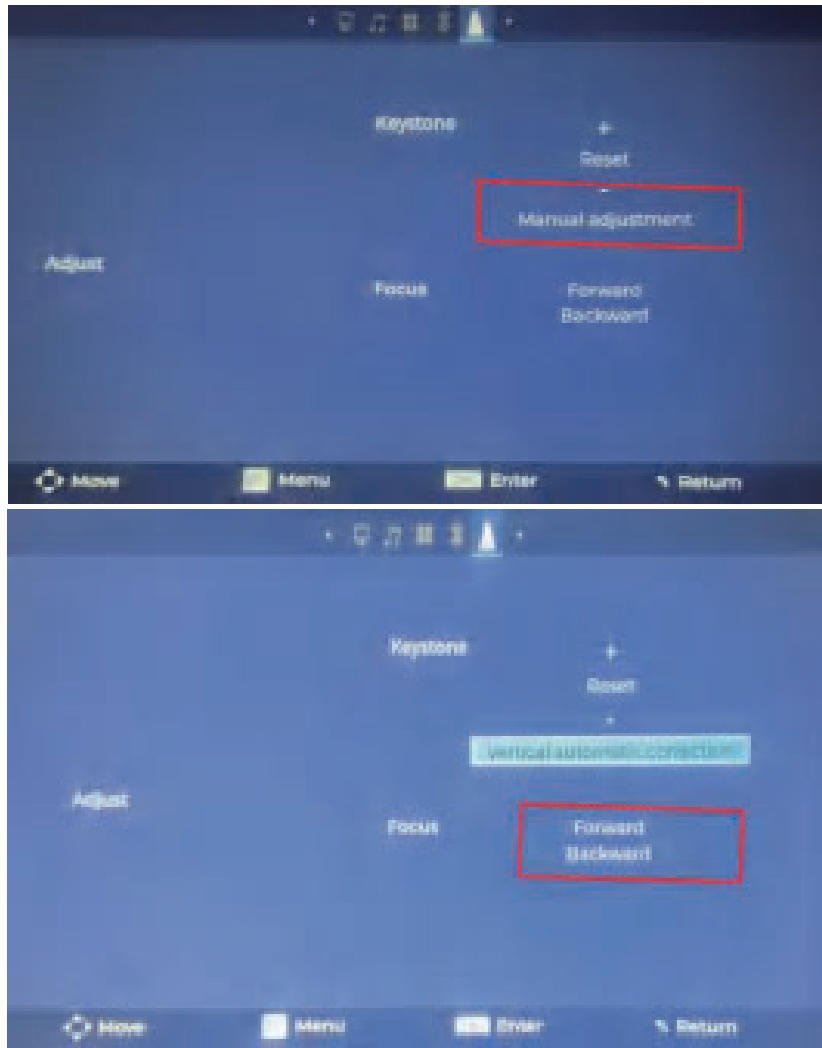

Electric-focus

There are two ways to adjust focus, you can stay in that settings list and adjust focus forward or backward. Another method is to simply use the "F+" "F-" buttons on the remote control to adjust the focus on any interface.



INSTALLATION

Projection Distance and Size

If you want to get a free projection screen, please email us via


US: Support_us@lisowod.com

Please follow the data in chart below, to adjust the image size and the distance.

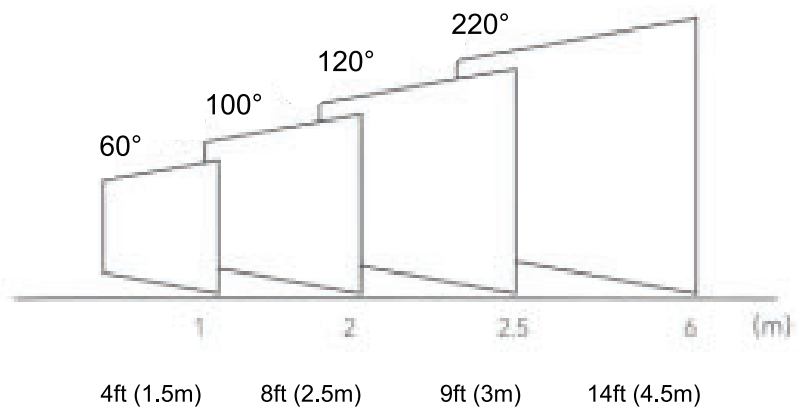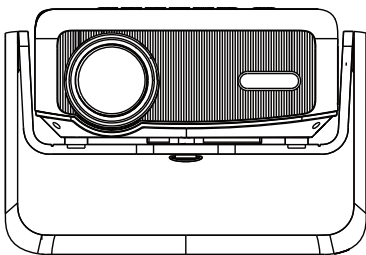

Installation Method

The projector can be hung from the ceiling using a special hanger frame or placed on a stable desk to project the image based on the operating environment and requirements. The installation method is as follows:


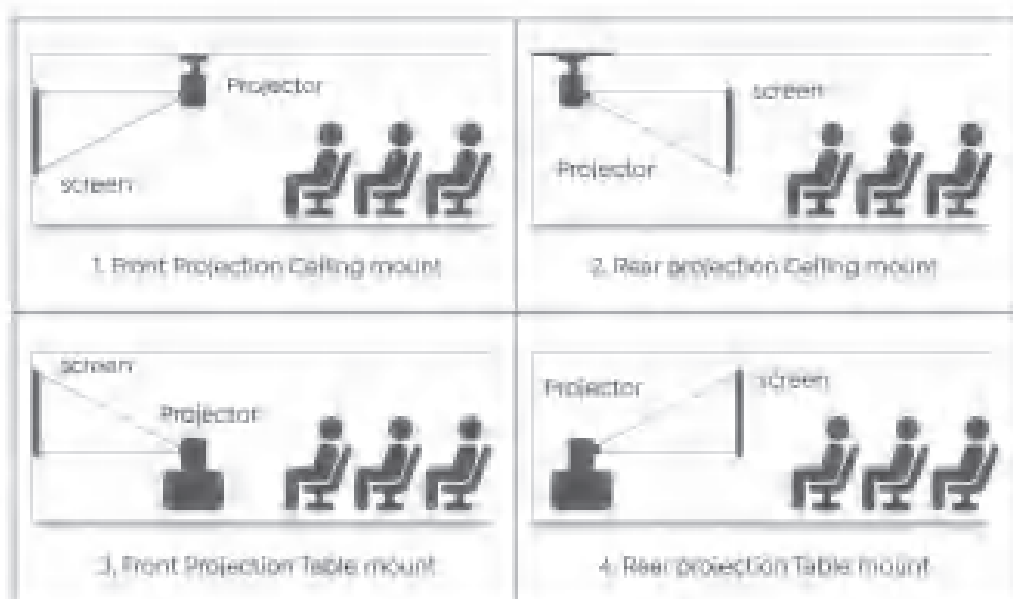


PROJECTOR INSTALLATION

Projector Installation

Note:

the screw hole on the bottom of the projector is compatible with a 1/4-inch screw.

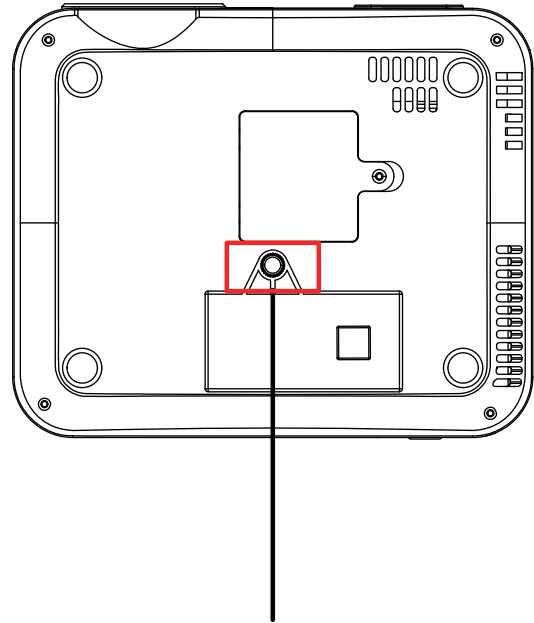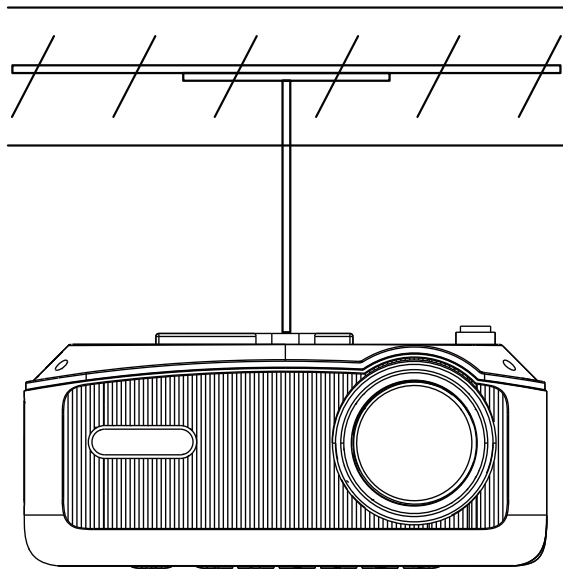

1/4-inch screw hole (diameter 6.35mm)

SETTING MENU


Clicking on the gear icon in the top right corner of the main menu will take you to the settings page, where you can adjust functions such as images and sound.

Picture



Menu	Options	Functions
Image Mode	Standard/Dynamic /Mild/User	Adjust image effects. Selecting "User" enables more customization options.
Contrast	0-100	Set brightness contrast
Brightness	0-100	Adjust screen brightness
Color	0-100	Customize screen colors
Sharpness	0-100	Enhance image sharpness
Color temperature	Cold/Standard/Warm	Light warmth level


Sound

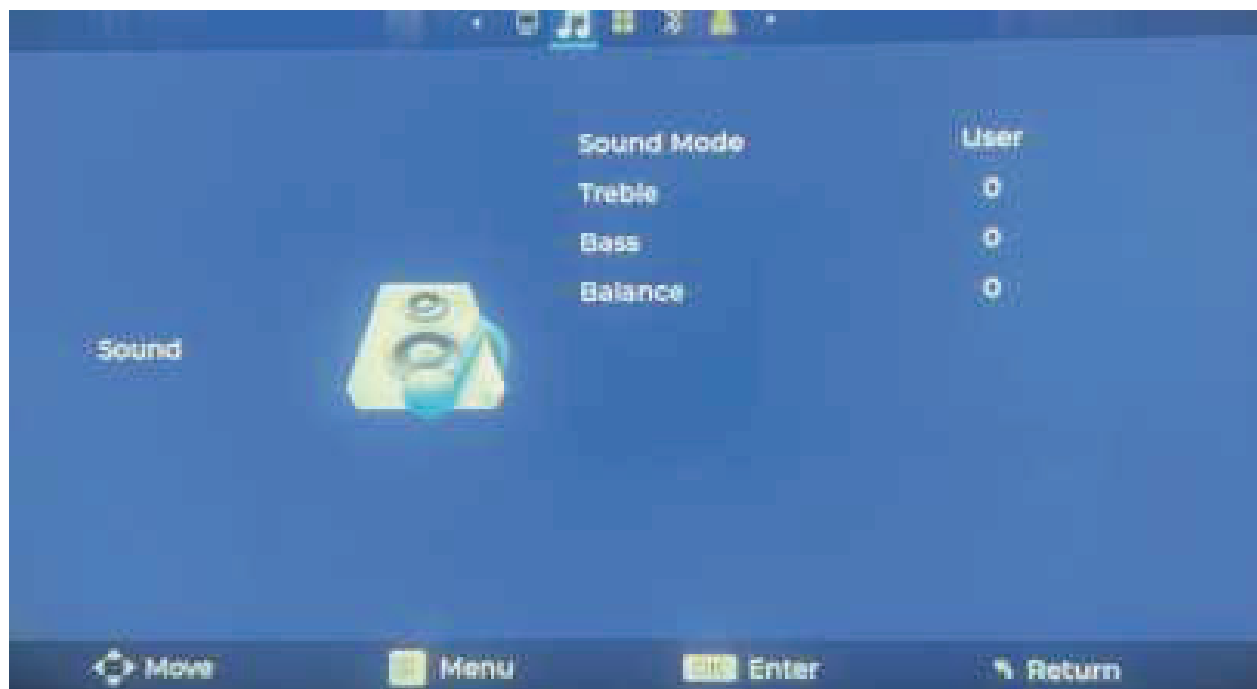

Menu	Options	Functions
Sound Mode	Standard/Music/ Movie/Sports/User	Adjust the sound quality to match the type of video
Treble	0-100	Set for more treble
Bass	0-100	Set for more bass
Balance	0-100	Set the balance from bass to treble

SETTING MENU

Option

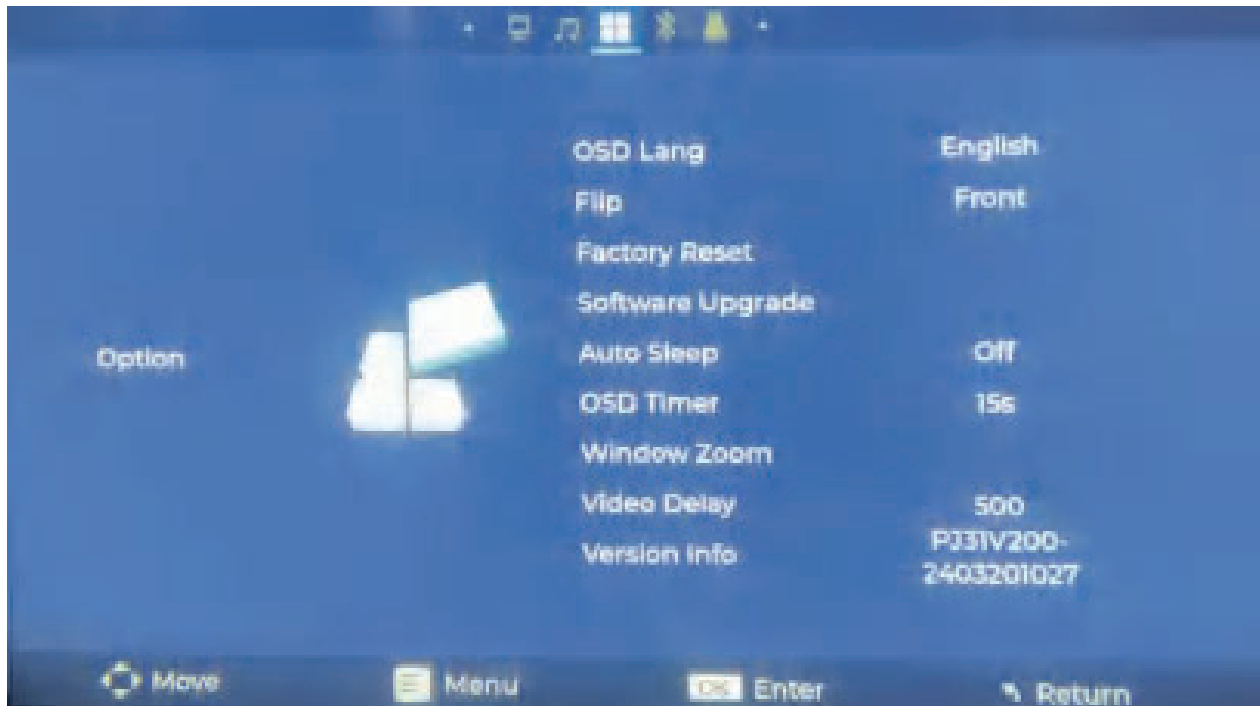

Menu	Options	Functions
OSD Language	/	Setting the system language
Flip	Front/Rear on Desk/Front on Ceiling	Selecting the projection method
Factory Reset	/	Restoring factory settings
Software Upgrade	/	System upgrade
Auto Sleep	60m/120m/180m	Automatically turn off the screen
OSD Timer	5s/10s/15s/20s/25s/30s/	Return to the main menu after reaching the set time
Window zoom	/	zoom&screen ratio&reset
Video Delay	0-2000	Adjust the screen delay within a certain range.
Version Info	/	Version number

PROJECTOR SPECIFICATIONS

Imaging technology	LCD
Native resolution	1920*1080
Light source	LED
Focus mode	Electronic focus
Projection distance	3-14ft.
Screen size	40-200 inches
Aspect ratio	16: 9 and 4: 3
Power input	100V-240V-50/60HZ
Input	USB*1/HDMI*1
Output	3.5 mm headphone jack
Unit size	172*143*80mm
Net Weight	0.7kg

*Any buyer with any questions who comes to contact us will have our promise to get a satisfactory solution + an Extra 6 Month Warranty+other surprises to thanks for your support!

US: Support_us@lisowod.com

Phone&Text Support: (971) 337-8504

EU: Support@lisowod.com

NET: <https://lisowod.com>

FCC STATEMENT:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

- English: "

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) this device may not cause interference, and

(2) this device must accept any interference, including interference that may cause undesired operation of the device."


- French:"

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil n' doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement."

Operations in the 5.15-5.25GHz band are restricted to indoor usage only

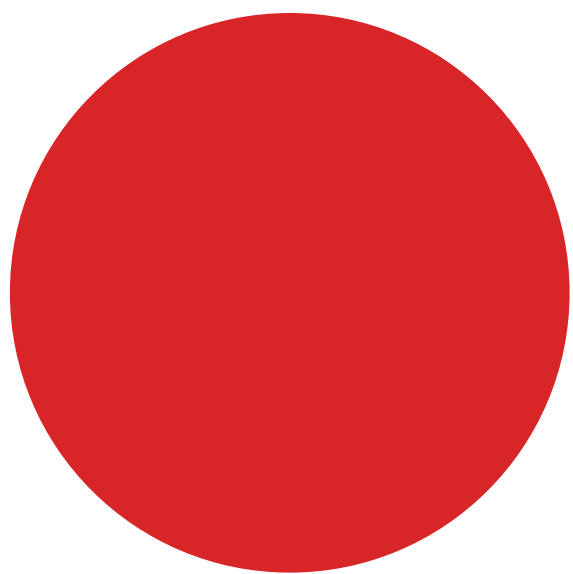

目次

お問い合わせする方法	001
故障かな?と思ったら	002
梱包品の確認	004
プロジェクター各部のはたらき	005
リモコン各部のはたらき	007
入力信号の選択	008
無線接続する方法	009
-ワイヤレスミラーリング.....	009
-ブルートゥース.....	012
投影画面の設定	014
-ズーム.....	014
-キーストーン補正.....	015
-電動フォーカス.....	016
プロジェクターの取付方法.....	017
その他の設定.....	019
製品の仕様.....	023

弊社は製品を常に改良しています。
取扱説明書に掲載されている画像や説明は参考用であり、
実際の製品と異なる場合があります。
正確な情報は実際の製品をご参照ください。
最新版はオンラインでアップグレードすることで入手できます。

JP: Support_jp@Lisowod.net



● 3年間保証期間を有効にしましょう ●

L02プロジェクターをご購入いただき、誠にありがとうございます。

1分のお時間を割いてQRコードをスキャンし、3年間の保証を有効にしましょう。
3日以内に手続きを完了することをお勧めします。



ご注意：QRコードをスキャンして保証を有効にできない場合は、
以下のメールアドレスまでご連絡いただき、保証手続きのサポートを行います。

🌐 <https://lisowod.com>

✉ JP: Support_jp@lisowod.com

弊社はより良い製品をより良いサービスで、お届けできることを目指しております。

常に商品機能の改善を行っておりますので、取説に書かれていた画像や説明は実際の商品とは異なる場合があります。アップグレード機能による最新の状態に更新することができます。

お買い上げいただいた**L02**の保証登録または正規品認証(真贋判定)を行うには、下記の公式にお問い合わせください。

JP: Support_jp@lisowod.com

本製品は到着日から**24時間365日**受付可能のアフターサービスが無料で提供されます。ご注文番号が保証書の代わりとなりますので、保証書を紛失された場合、保証は受けられない心配はありません。突然のトラブルやお困りごとがございましたら、弊社のスタッフにお問い合わせくださいませ。

保証登録または延長するには、お客様による登録が必要です。
下記の**URL**にアクセスするか、**QRコード**をスキャンして登録ください。

公式サイト：**<https://lisowod.com>**



公式サイトからの登録ができない場合は、メールにてお問い合わせください：

JP: Support_jp@lisowod.com

Amazonでお問い合わせ：

注文履歴>注文の詳細>出品者名をクリック>出品者に質問する



お問い合わせする方法

弊社のプロジェクターの画質にはご満足いただけるのでしょうか？

ご使用中に何か不明点がございましたら、お気軽にお問い合わせください。

お客様のご希望に沿って解決策を提供できますように努めています。

Lisowodに連絡すれば、保証期間を3年間+6ヶ月に延長することもできます。

もし弊社のプロジェクターを試していただき感想や、商品開発・改善（商品機能、色、デザイン）についてのご意見などがございましたら、ぜひお聞かせください。


商品開発部にお声を伝え、今後の商品開発の参考にさせていただきます。

ご意見が採用された場合には、より早く新商品をご自由にお試しいただける体験資格をご用意します。その時は新製品を無料でお送りさせていただきます。

ご連絡をお待ちしております。

Lisowodサポートチーム

下記のQRコードをスキャンして、LISOWODに連絡しましょう！



下記のQRコードをスキャンして、Youtubeでの操作動画をご参照ください



JP: Support_jp@lisowod.com



公式ウェブサイト: <https://lisowod.com>



故障かな?と思ったら

プロジェクターの使用中に不明な点がありましたら、下記によくある質問の解決策をご参考ください。もしそれにしてもご問題が解決できないなら、遠慮なくメールにてご連絡くださいませ。24時間365日受付可能のアフターサービスが無料で提供されます。弊社に連絡してくださるお客様に半年保証期間を延長するサービスを提供します。

JP: Support_jp@lisowod.com

Q: プロジェクターを設置する方法が分からないんですが、参考になる手順説明動画はありますか?

A: 弊社は手順説明&商品紹介のハウツー動画をYouTubeにアップロード完了いたしました。初心者でも動画を見ながら簡単に設置できます。YouTubeで「Lisowod」と検索すれば、すぐに見つかります。

Q: プロジェクターが届きましたが、リモコンがありません。どうしたらいいのでしょうか?

A: : もし受け取った製品に付属品がない場合、どの付属品がないかをお知らせください。できるだけ早くお送りするためにSupport_jp@lisowod.comまでご連絡ください。

Q: 画面がぼやけている、フォーカスを調整するにはどうすればいいですか?

A: このミニプロジェクターはリモコンでの電動フォーカスに対応しています。リモコンの「F+」「F-」で調整してください。

Q: リモコンが反応しません。

A: ① リモコンがIR受信機を直接指していることを確認してください。

② IR受信機を覆わないでください。

③ 電池を入れていることを確認してください。このリモコンには電池が付属していません。

Q: プロジェクターとスマートフォンが同じWiFiに接続されていますが、画面ミラーリングを行おうとすると、プロジェクターの名前が検出されません。

A: ① プロジェクターを初期化し、スマートフォンに再接続してください。

② 接続されているネットワークから切断し、再びパスワードを入力して接続してください。

③ スマートフォンとプロジェクターを一度ホットスポットを使用してインターネットに接続してみてください。

上記の方法でも問題が解決しない場合は、カスタマーサービスにお問い合わせください。

Support_jp@lisowod.com

Q: プロジェクターでNetflixの動画が再生できません。なぜですか？

A: Netflix、Disney+、Huluなどのビデオプラットフォームは、HDCP著作権保護の対プロジェクターで著作権で保護されている動画を視聴する方法は主に4つあります。

①Fire tv stickで投影すること。

②変換アダプタを使って、スマホの充電端子をHDMIに変更して有線接続すること。

③付属のHDMIケーブルで接続し投影すること。

④無線接続の場合は、スマホからブラウザで有料アプリの動画を開き、また動画を投影すること。

Q: 画像が上下逆になっています。

A: 【設定】入り、リモコンの左右キーで「オプション」→「フリップ」を選択する、投影画像を反転させてください。


Q: カスタマーサービスチームに連絡しましたが、返信がありません。なぜでしょうか？

A: 弊社はすべてのメールに24時間以内に返信することをお約束しています。もし1日以上返信がない場合、おそらく弊社のメールがブロックされたか、迷惑メールボックスに入ってしまった可能性があります。再度メールを送信するか、lineでご連絡ください。


Q: プロジェクターの底部にある取り付け用ネジのサイズを教えてくださいませんか？

A: 取り付け用ネジ穴のサイズは1/4インチで、直径は約6.35mmです。

梱包品の確認

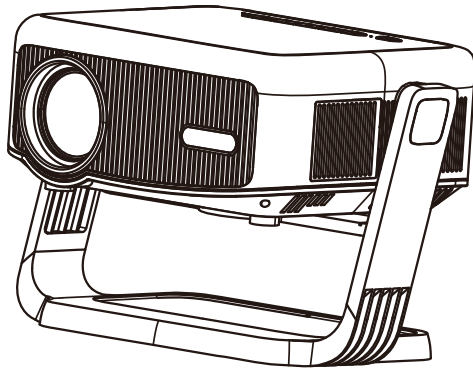


L02

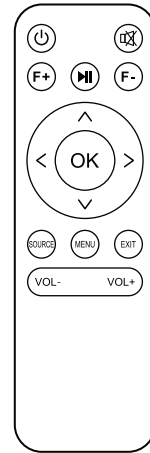


リモコン



取り扱い説明書




HDMIケーブル




電源ケーブル

注意事項

おすすめ

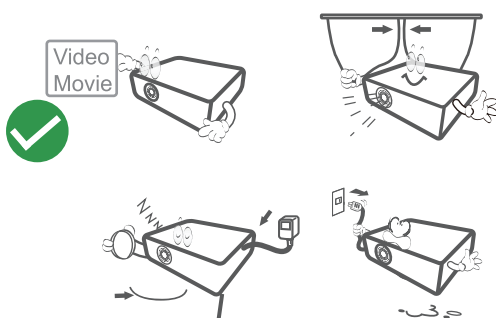


不正使用

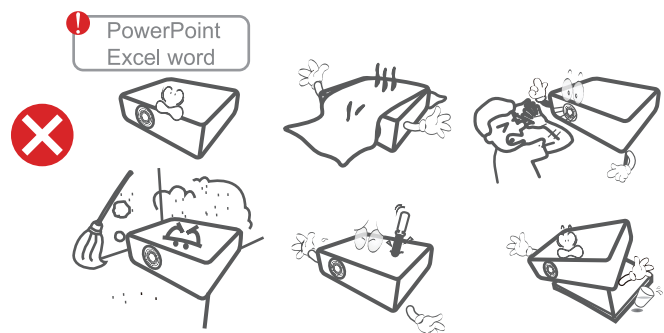


プロジェクター各部のはたらき


上面図

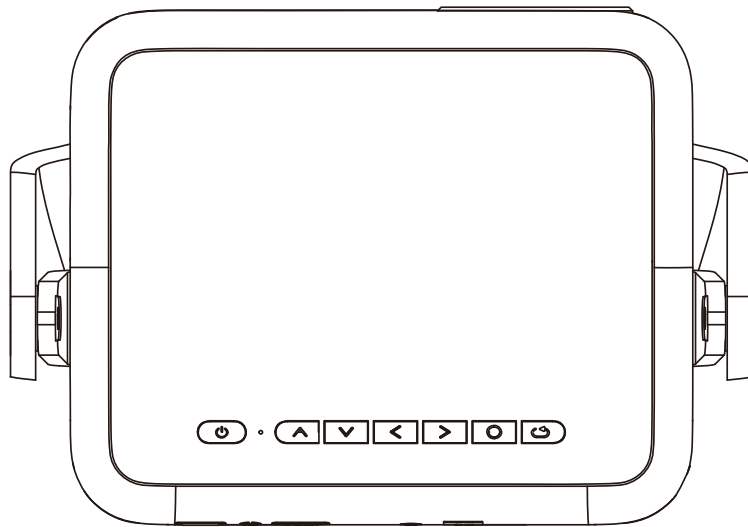


コントロールパネル

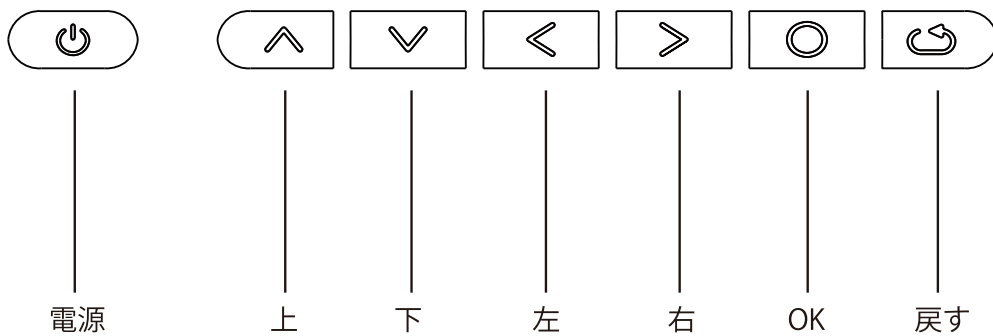

正面図

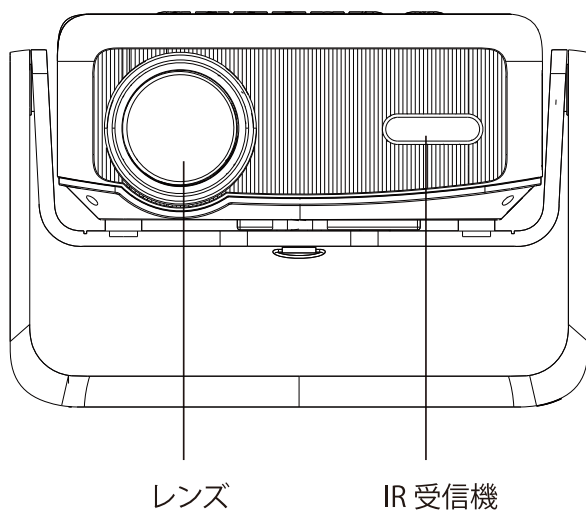

背面図

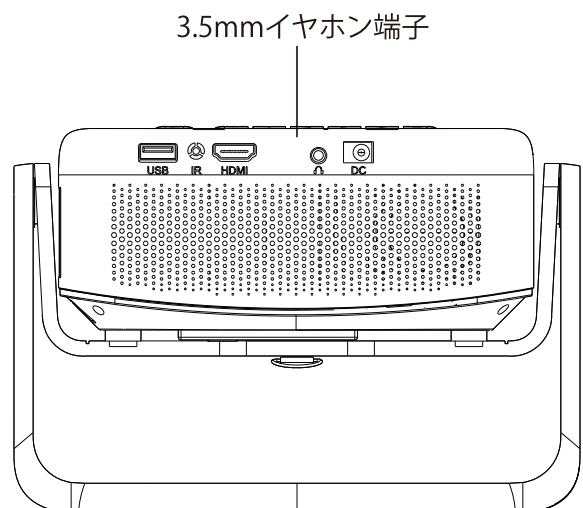




リモコンの取り付け

1. 使用前にリモコンに単三電池2個を取り付けてください。古い電池と新しい電池をリモコン内で混合しないでください。古い電池と新しい電池をリモコン内で混合すると、電力供給が不十分になり、操作が失敗する可能性があります。
2. リモコンを使用する際は、リモコンの信号送信機がプロジェクターの赤外線信号受信機を指していることを確認してください。



入力信号の選択

プロジェクターのリモコンで **⏮** ボタンを押して、入力ソースのインターフェースに入ります。

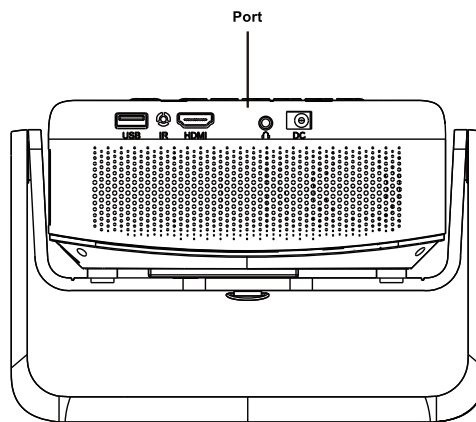



HDMI接続

HDMIケーブルを挿入したら、リモコンで **⏮** ボタンを押して [HDMI] モードを選択し、その後、ホーム画面から [HDMI] を選択してビデオを再生します。

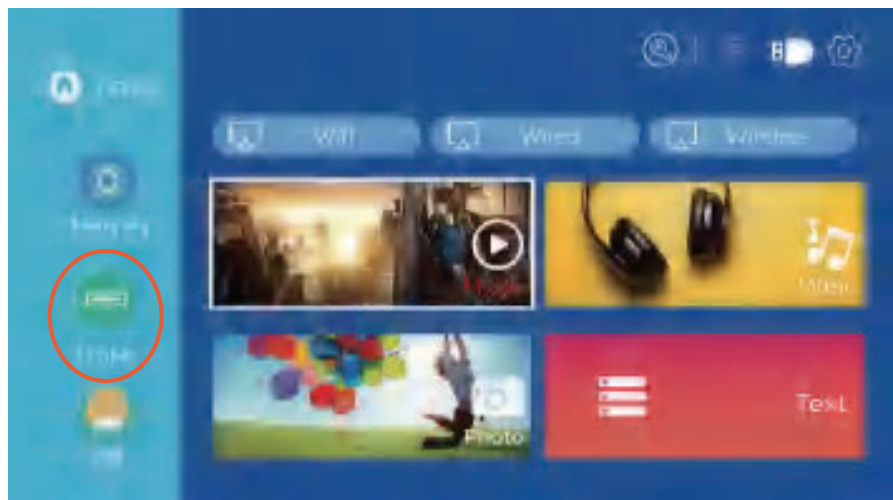


USB接続

USBメモリを挿入し、メディアに入ると、USBメモリ内の任意のドキュメントを再生できます。

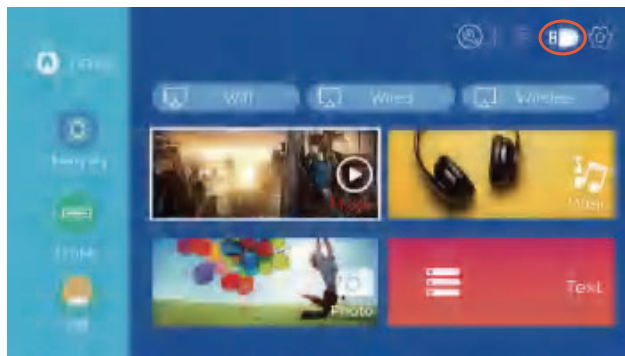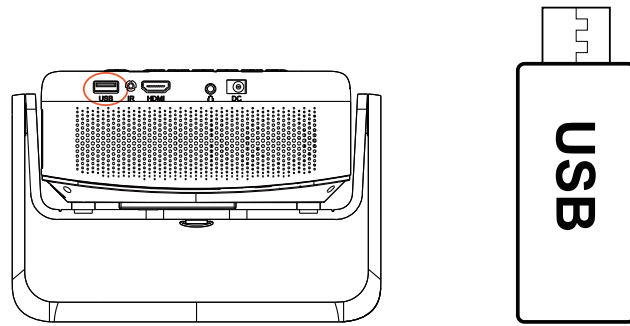

スピーカー/ヘッドフォン接続

有線スピーカーまたはヘッドホン/イヤフォンを、プロジェクターのオーディオ出力ポートに3.5mmオーディオケーブルで直接接続します。

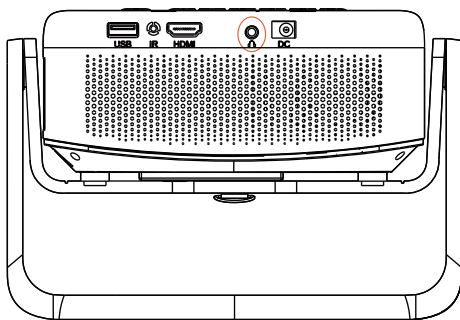

無線接続する方法

注意事項:

- ① ワイヤレス接続による画面ミラーリングの滑らかさは、ネットワーク環境によって影響を受けます。画面ミラーリングを使用する際には、帯域幅が100Mbit以上の環境が推奨されます。
- ② ワイヤレス接続を使用する際には、モバイルデバイスがプロジェクターに近いことを確認してください。1メートル以内の距離が推奨されています。
- ③ 一部のモバイルデバイスは、互換性の問題により画面ミラーリングをサポートしていない場合があります。
- ④ ご質問がある場合は、お気軽にLisowodにメールでお問い合わせください。



JP: Support_jp@lisowod.com

ワイヤレスミラーリング

ステップ1: プロジェクターを自宅のWiFiに接続します。



→ ホームページから [WiFi] を選択します

→ リストから自宅のWiFiを選択してプロジェクターを自宅のWiFiに接続します。

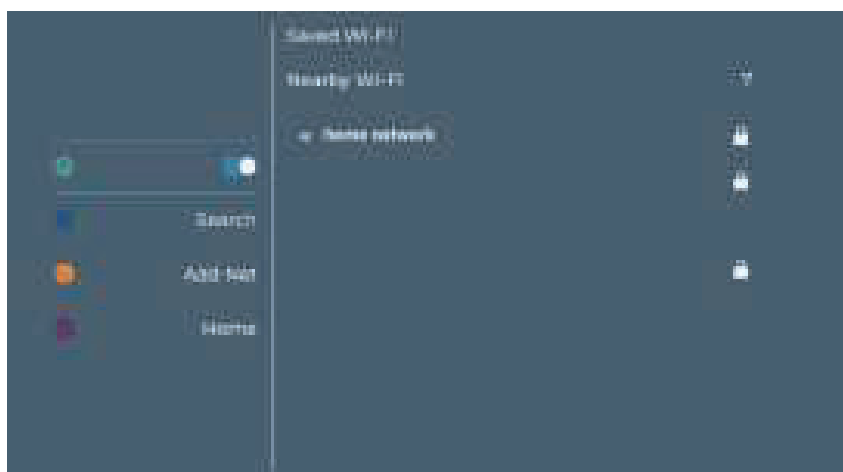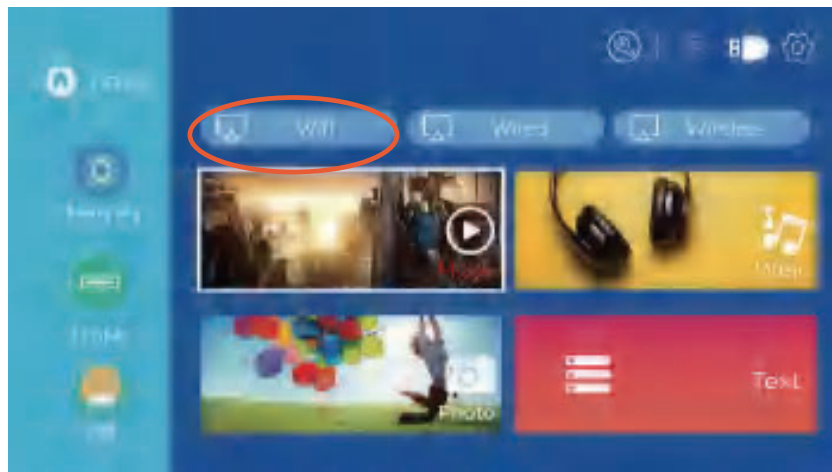


ワイヤレスで接続したい場合：


ホームページから [ワイヤレススクリーン] を選択します
画像の手順に従い、出力デバイスから投影ページを開きます
リストから「L02」を選択することで、プロジェクターと接続します。

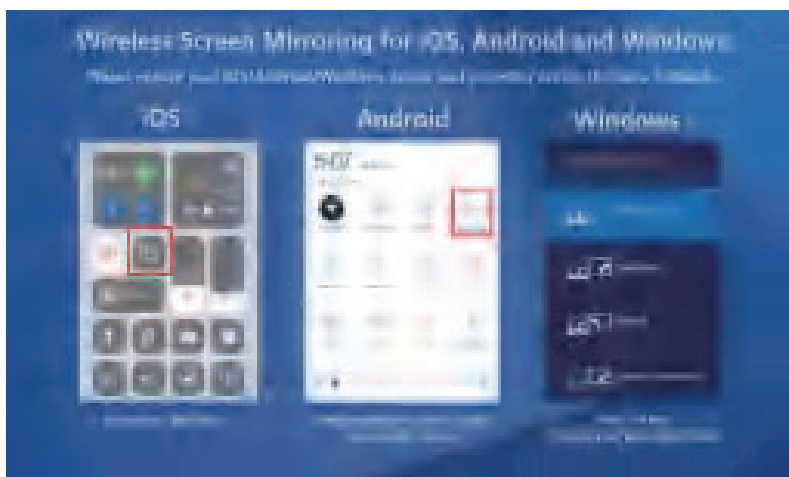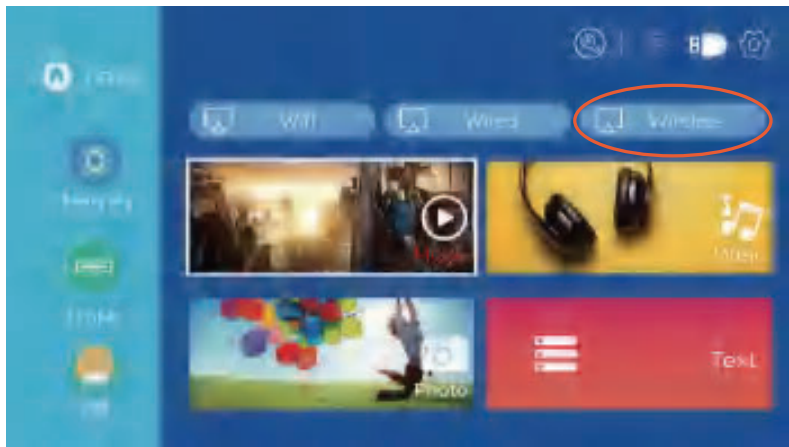

有線で接続したい場合：

ホームページから、[ワイヤードスクリーン] を選択します。
接続端子によって画像の接続手順に従ってください。
(接続後、対応する信号源(HDMI & USB)に切り替えれば完了です)

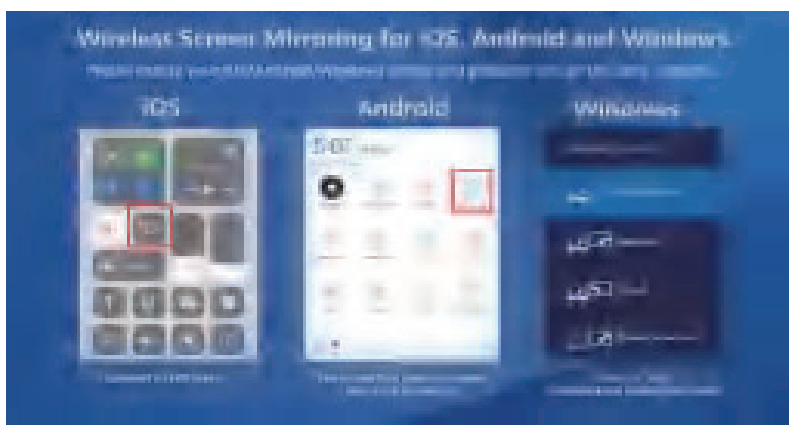

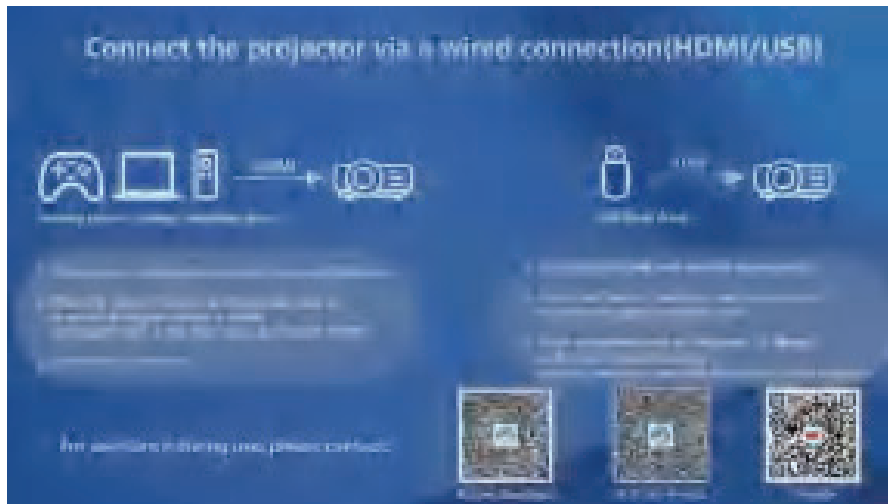

アプリの画面キャストの場合

「画面キャスト」機能は、出力デバイスがスリープ状態でも正常に投影できるようにする機能です。

この機能を使用できるかどうかは、アプリがこの機能を持っているかどうかによります。


ステップ1: デバイスとプロジェクターを同じネットワークに接続してください。

ステップ2: プロジェクターのホームページに移動し、**【ワイヤレススクリーン】**を選択してミラーリング画面に入ります。

ステップ3: 画面投影アプリを開きます。

ステップ4: アプリに「Screen Cast」または「Wireless Projection」ボタンを見つけます。


ステップ5: 次に、検索リストからプロジェクターのデバイス名を選択します。

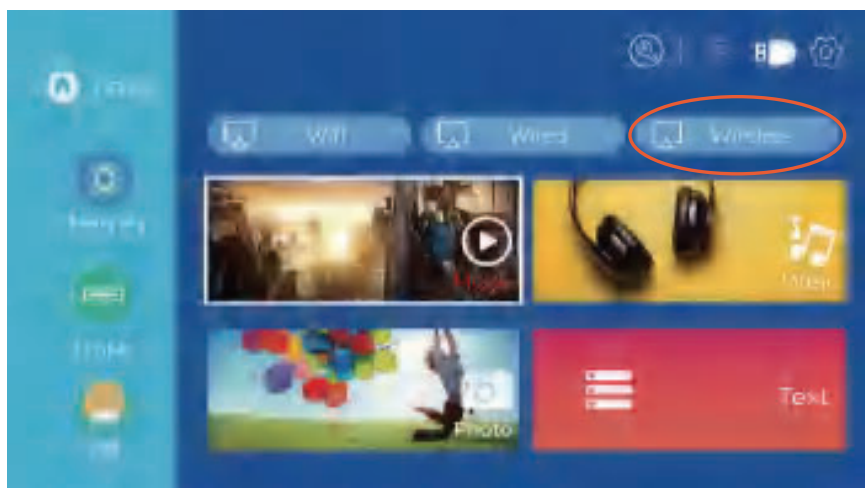

ブルートゥース


ブルートゥース機能は、Bluetoothスピーカーから音声を出力するために使用します。

Bluetoothでは映像を出力することはできませんので、無線での映像投影を行いたい場合はWi-Fiミラーリングをご利用いただくことをお勧めします。まずは、ホームページから「設定」→「BTデバイス」に移動します。

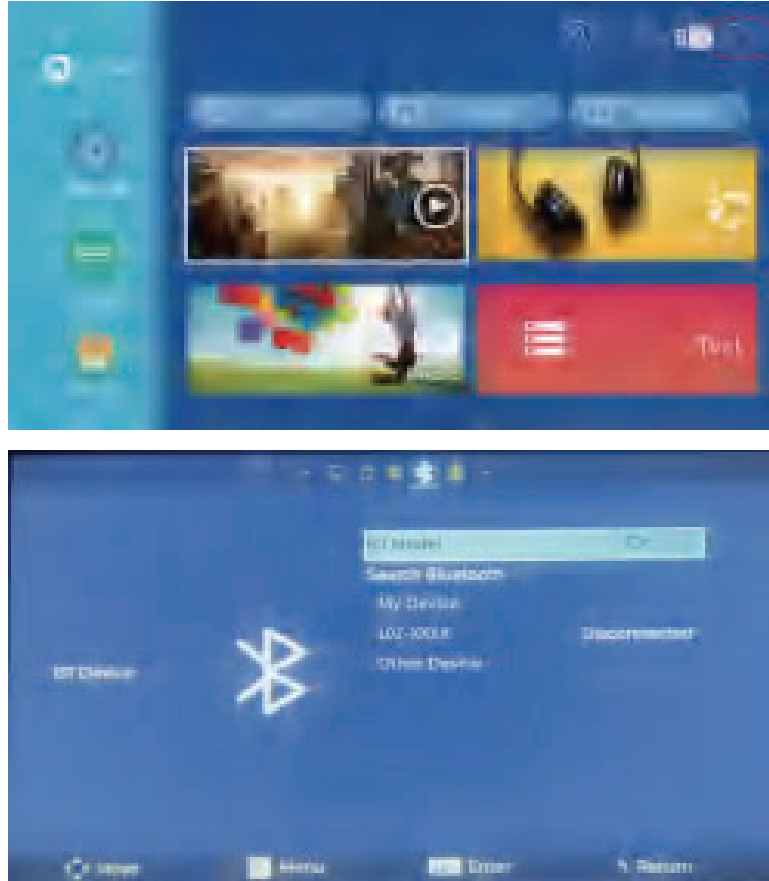


1. プロジェクターを外部のBluetoothスピーカーに接続します。

BT設定ページで、OKボタンを押してBTモードを「オン」にします
その後、「ブルートゥースの検索」ボタンを選択して利用可能なデバイスをスキャンします。
そして、接続したいBluetoothデバイス名を選択し、OKボタンを押してペアリングします。

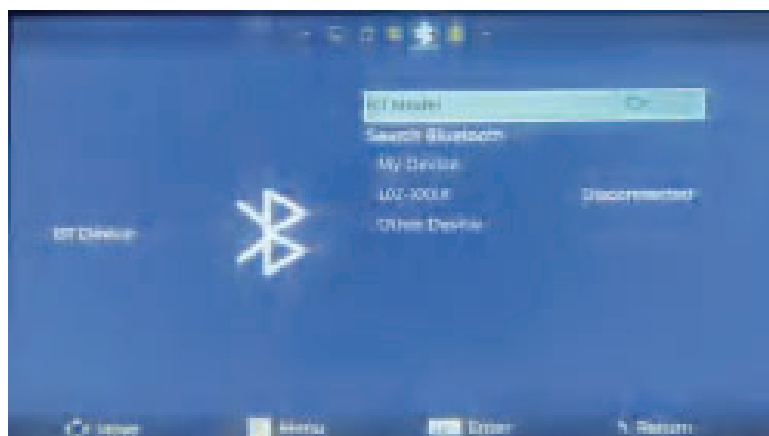

2. プロジェクターをスピーカーとして使用する方法

Bluetooth設定ページで、Bt受信モードを「レシーバー」に設定します。スマホのブルートゥース機能をオンにして、利用可能なデバイスを検索して接続します。

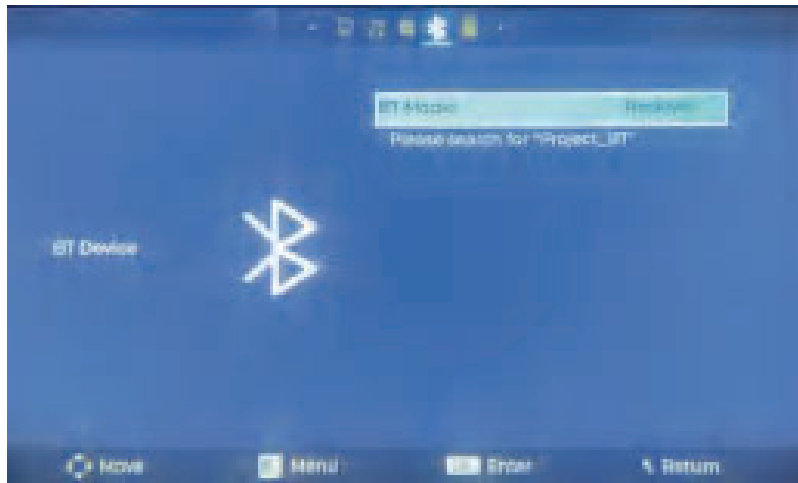

3. Bluetoothスピーカーが接続できない場合

Bluetoothスピーカーがプロジェクターに接続されると、ペアリング済みデバイスに表示されます。これは、プロジェクターが正常に接続されたことを意味します。ペアリングに失敗した場合は、Bluetoothスピーカーがプロジェクターに接続されていないことを意味します。

次の方法を試してみてください：

方法1:[UNPAIR]をクリックして、BTを再度接続してください。

方法2:プロジェクターでBluetoothをオフにしてください(リモコンの「OK」ボタンを押します)。

次に、BTをオンにして(リモコンの「OK」ボタンを押します)、Bluetoothスピーカーを再接続してください。



方法3:プロジェクターの電源を切って再起動し、Bluetoothスピーカーを再接続してください。

方法4:工場出荷時の設定に戻してから、Bluetoothスピーカーを再接続してください。

投影画面の設定

ズーム

ホームページの右上にある設定アイコンをクリックして設定リストに入ります
「オプション」設定から「ウィンドウズーム」をクリックして、投影された画面を
100%～70%のズームが調整可能になります

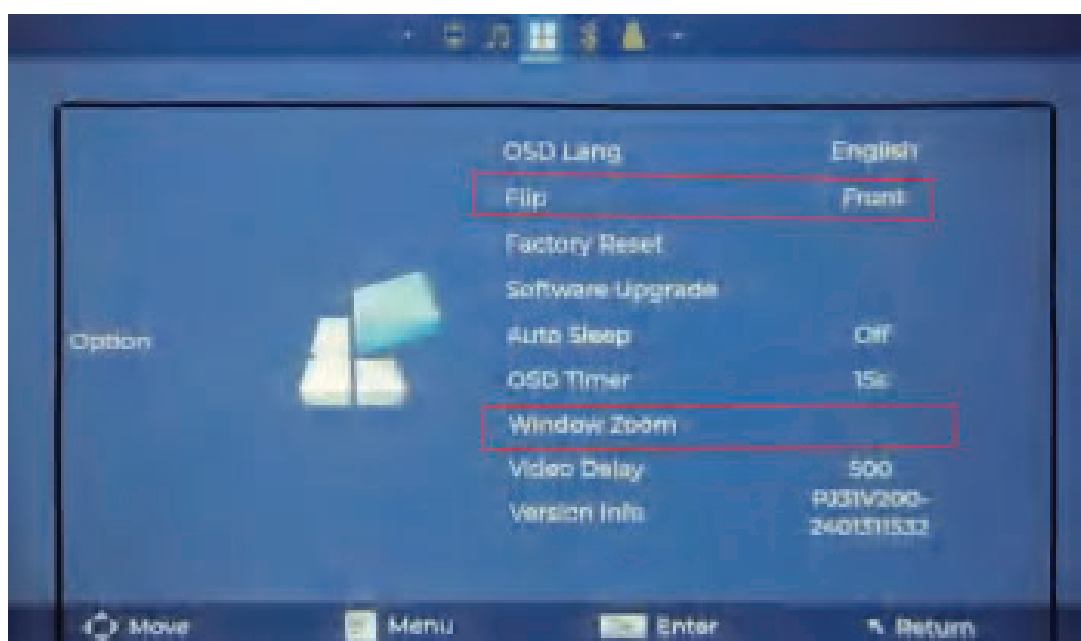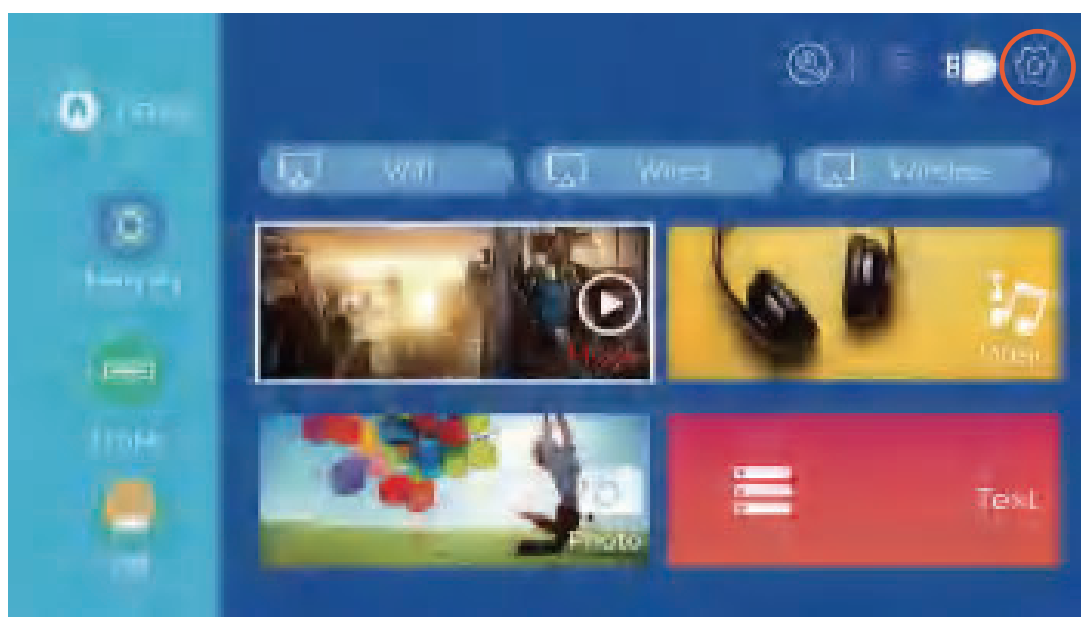

キーストーン補正



自動、手動の垂直キーストーン補正、フォーカス調整をするには、ホームページの右上にある設定アイコンをクリックして「調節」設定に入ります。



>>自動垂直キーストーン補正

自動垂直キーストーン補正を行うには、リモコンの方向キーで「垂直自動補正」を「オン」にすると、投影された画面歪みを自動的に補正します。

>>±30°の手動垂直キーストーン補正

手動のキーストーン補正を希望する場合は、リモコンの方向キーで「手動調整」を「オン」にすると、「+」「-」を選択してキーストーン補正度を調整できます。

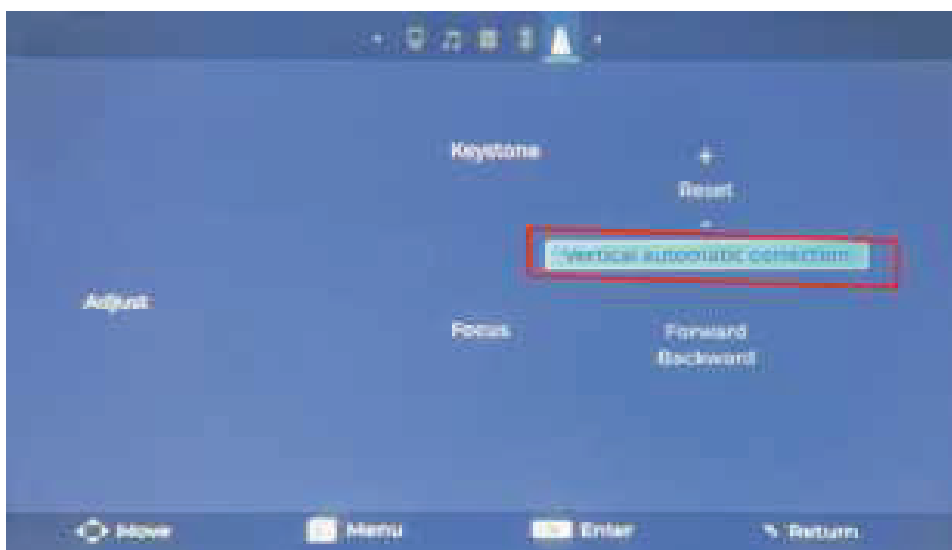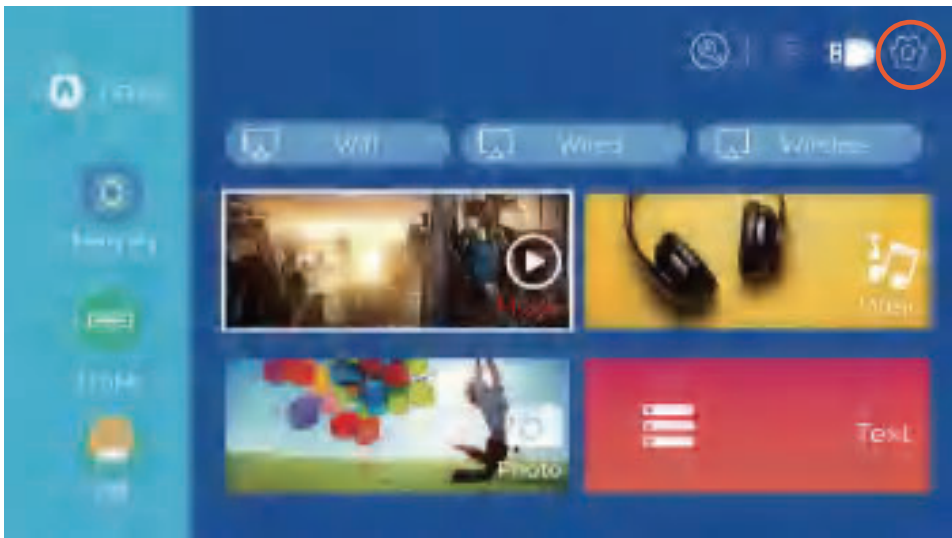

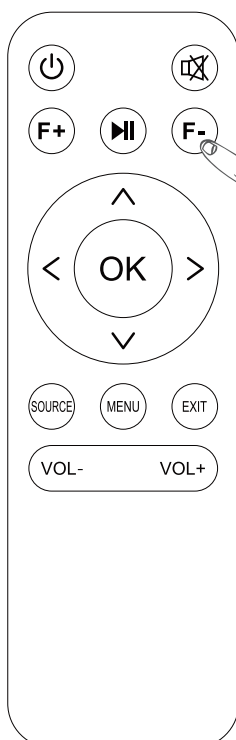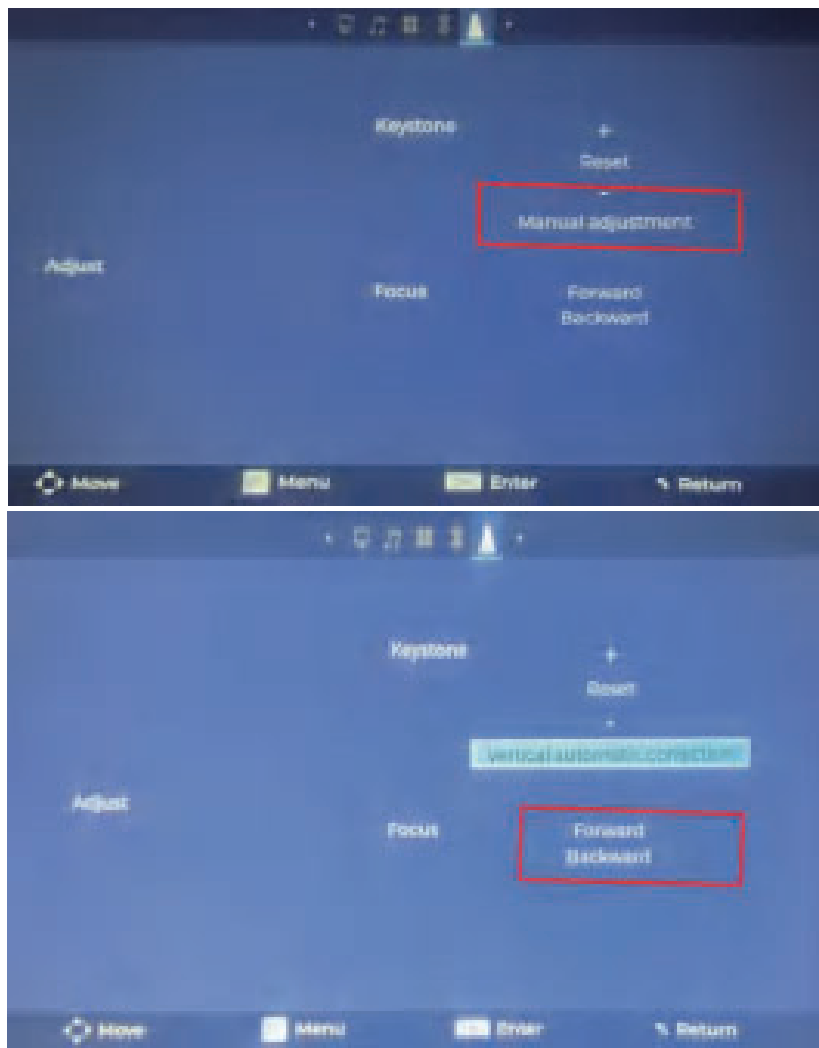

電動フォーカス

フォーカスを調整する方法は2つあります。

方法1. 「調節」設定から、「フォワード」「バックワード」を選択することで、フォーカスを微調整することができます。

方法2. リモコンの「F+」、「F-」ボタンを押して、フォーカスを微調整することができます。

プロジェクターの取付方法



投影距離と画面サイズ

投影されたサイズは、プロジェクターと壁(スクリーン)との距離によって異なります。

距離が遠いほど、投影される画像は大きくなります。

詳細については、以下を参照してください。

(Support_jp@lisowod.comまでにお問い合わせして無料スクリーンがもらえるチャンス!)

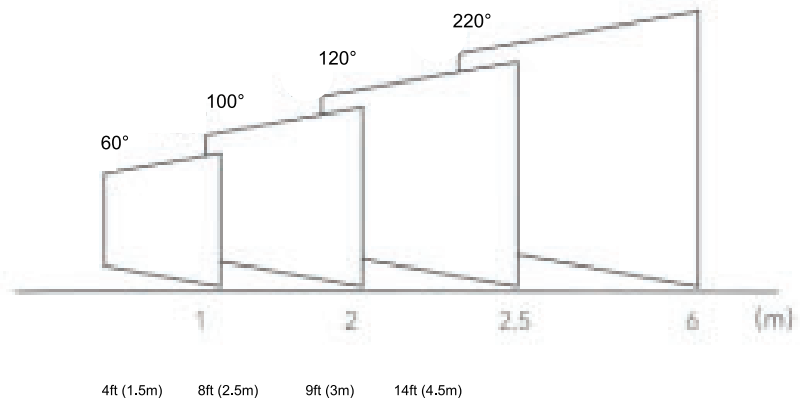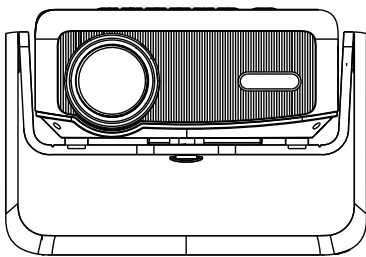


設置方法

プロジェクターは、設置方法によって投影モードを変更することが可能です。

設置方法は「正面から映す」、「正面から天吊り」、「後ろから映す」、「後ろから天吊り」をお選びいただけます。

設置が完了しだい、設定の「フリップ」から投影モードを変更することを忘れないようにしてください。


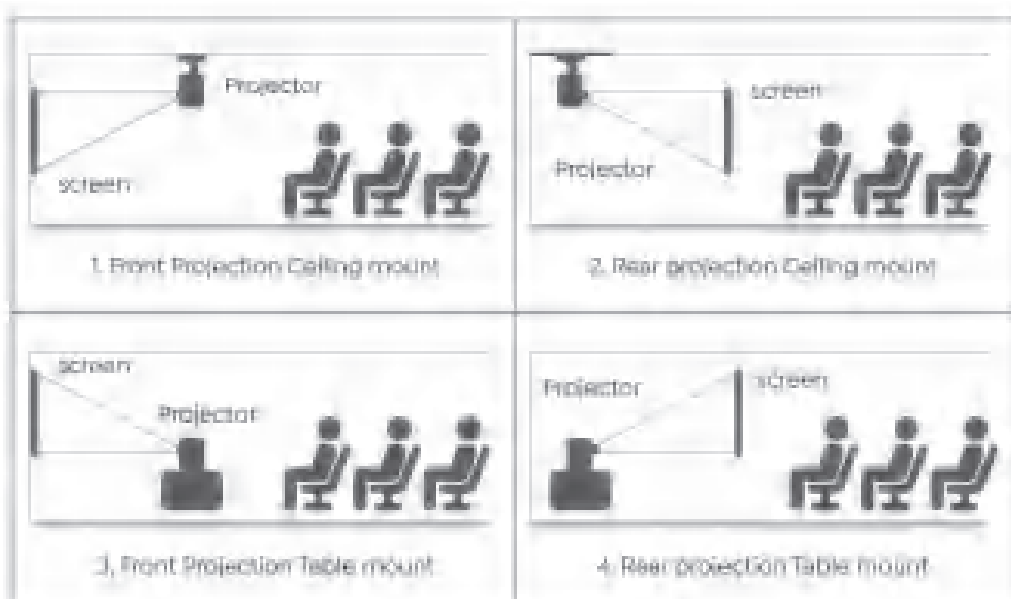


取り付けのネジ穴

注意:

プロジェクターの底部にあるねじ穴は、1/4インチのねじ(直径6.35mm)と互換性があります。

1/4インチネジ穴(直径6.35mm)

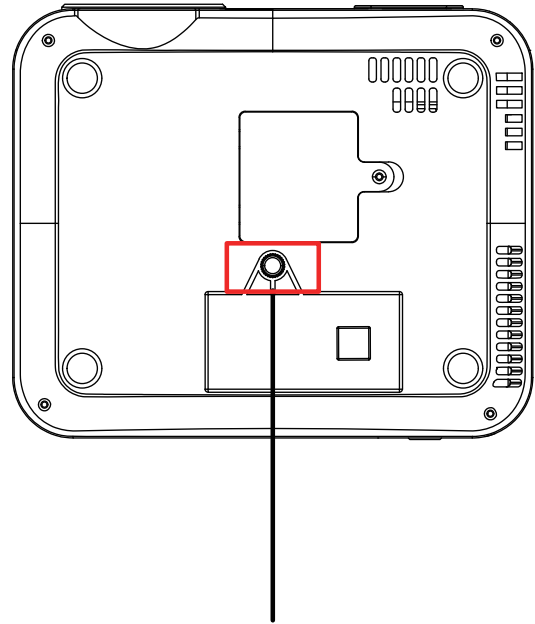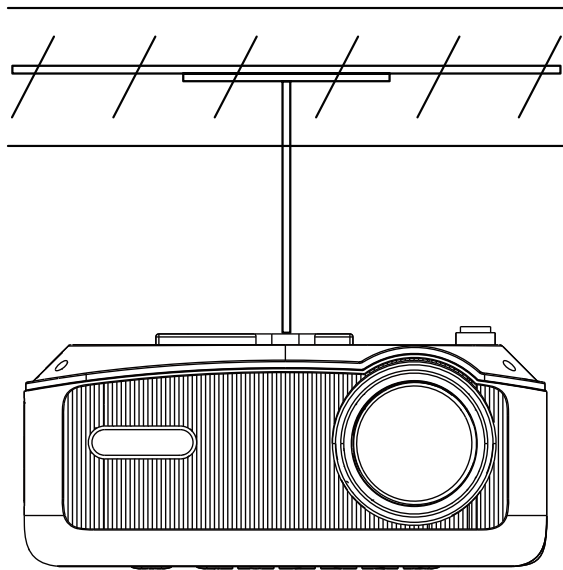

1/4インチネジ穴(直径6.35mm)

その他の設定


右上隅にある設定アイコンをクリックすると、画像や音声などの機能を調整できる設定ページに移動します。

画像設定



メニュー	オプション	機能
画像モード	標準/ダイナミック/マイルド/ユーザー	画像効果を調整する。 「ユーザー」を選択して、さらにカスタマイズする
コントラスト	0-100	コントラスト比を調整する
ブライトネス	0-100	明るさを調整する
色合い	0-100	画面の色調をカスタマイズする
シャープネス	0-100	画像の鮮明度を調整する
色温度	Cold/Standard/Warm	明るさの温かさレベル


音声設定

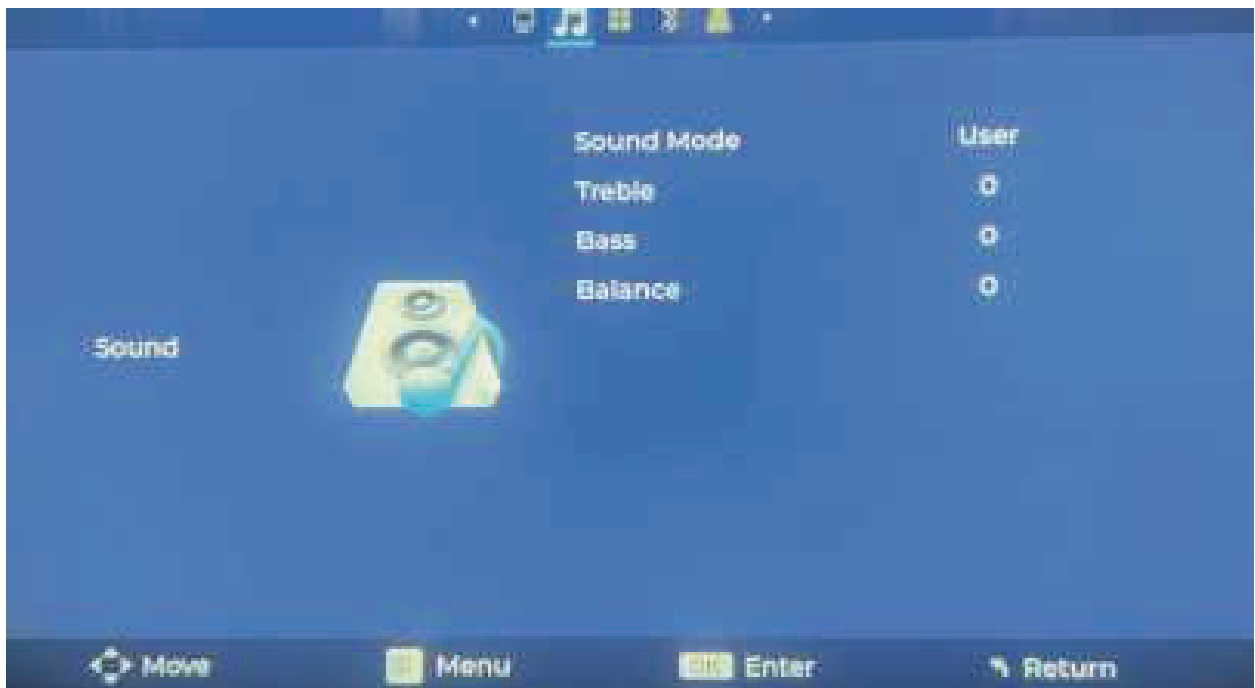

メニュー	オプション	機能
画像モード	標準/音楽/映画/ スポーツ/ユーザ	音声効果を調整する。 「ユーザー」を選択して、 さらにカスタマイズする
トレブル	0-100	高音を増やす設定
バス	0-100	低音を増やす設定
バランス	0-100	バランスを低音から高音に調整

その他の設定

画像設定

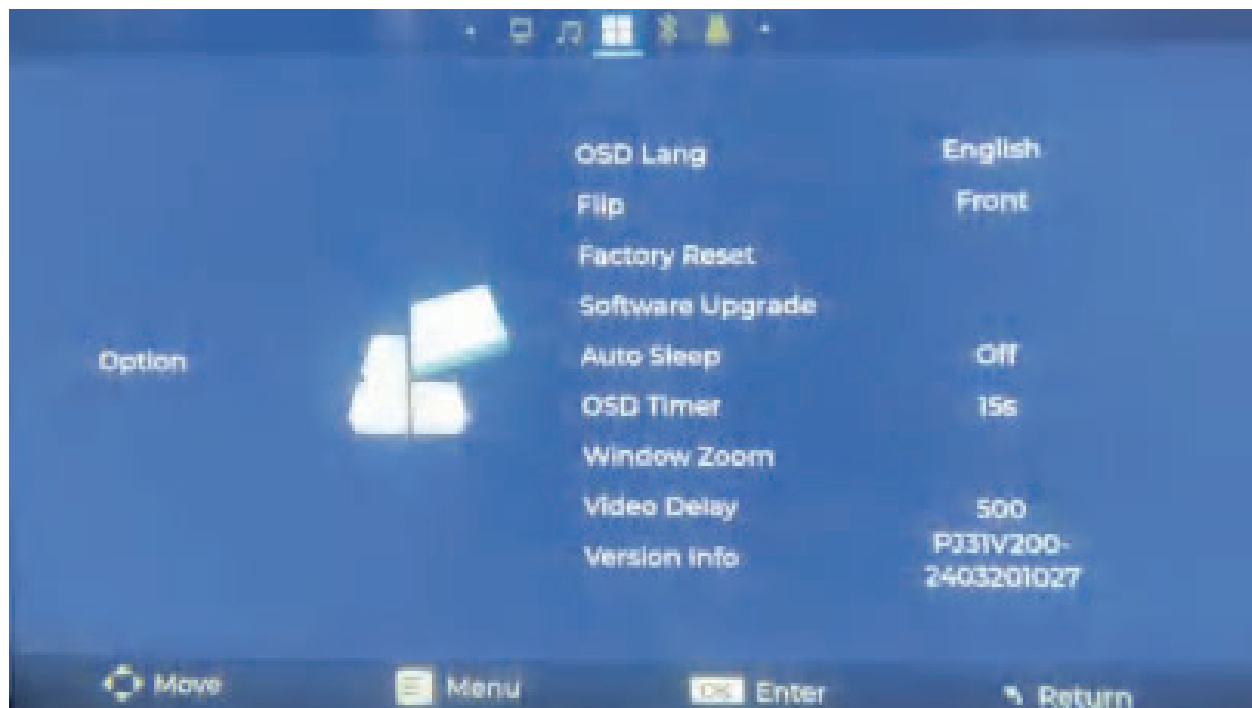

メニュー	オプション	機能
OSD言語	/	システム言語を設定する
フリップ	正面から映す/正面から天吊り/ 後ろから映す/後ろから天吊り	投影方法を選択する
ファクトリーリセット	/	工場出荷時の設定に戻る
ソフトウェアアップグレード	/	システムのアップグレード
オートスリープ	60m/120m/180m	画面を自動的に休眠状態にする
OSD タイマー	5s/10s/15s/20s/25s/30s/	設定時間に到達した後 にメインメニューに戻る
ウィンドウズーム	/	ズーム&画面比率&リセット
ビデオディレイ	0-2000	ある範囲内で画面の遅延を調整する
バージョン情報		バージョン番号

製品の仕様

画像技術	LCD
ネイティブ解像度	1920×1080
光源	LED光源
フォーカスモード	電子フォーカス
投影距離	3～14メートル
画面サイズ	40～200インチ
アスペクト比	16:9および4:3
電源入力	100V-240V-50/60HZ
入力	USB、HDMI1
出力	3.5mmヘッドフォンジャック
ユニットサイズ	172*143*80mm
ネット重量	0.7kg

何かお手伝いできることがありましたら、必ず満足のいく解決策を提供しますので、

ぜひご連絡くださいませ。

今すぐお問い合わせすると、さらに6ヶ月の追加保証とその他のサプライズもご用意しております！

お問い合わせ先：

Support_jp@lisowod.com

Lisowod