



7 The Backlight

Press fn1 + A to change the lighting effect

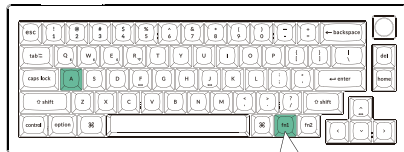

fn1 + A


Press fn1 + caps lock to turn the backlight on/off

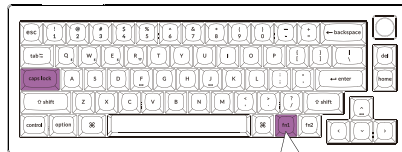

fn1 + caps lock


8 Adjust The Backlight Brightness

Press fn1 + S to increase the backlight brightness

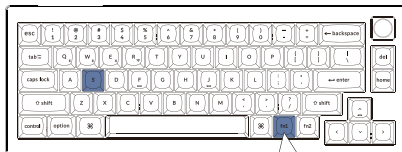

fn1 + S

Press fn1 + X to decrease the backlight brightness

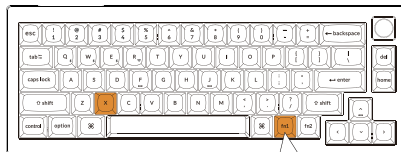


fn1 + X

9 Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.



10 Factory Reset






Troubleshooting? Don't know what's going on with the keyboard?

1. Download the right firmware and QMK Toolbox from our website.
 2. Unplug the power cable and switch the keyboard to Cable mode.
 3. Remove the space bar keycap to find the reset button on the PCB.
 4. Hold the reset key first, then plug the power cable into the keyboard.
Release the reset key after 2 seconds, and the keyboard will now enter DFU mode.
 5. Flash the firmware with the QMK Toolbox.
 6. Factory reset the keyboard by pressing fn2 + J + Z (for 4 seconds).
- *Step by step guide can be found on our website.

V2 MAX WIRELESS MECHANICAL KEYBOARD SPECIFICATIONS

Specifications	
Layout	65%
Switch type	Mechanical
Width	123.3 mm
Length	329.9mm
Front height	23 mm (without keycaps)
	32.4 mm (with keycaps installed)
Back height	29.4 mm (without keycaps)
	42.7mm (with keycaps installed)
Keyboard feet height	2 mm
Angle	3.5 / 7.91 / 10.88 degree


V2 MAX WIRELESS MECHANICAL KEYBOARD OVERVIEW

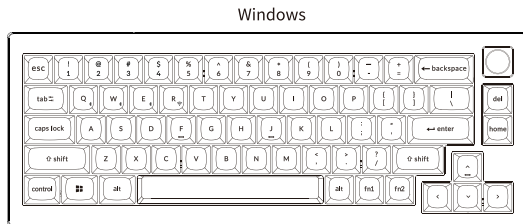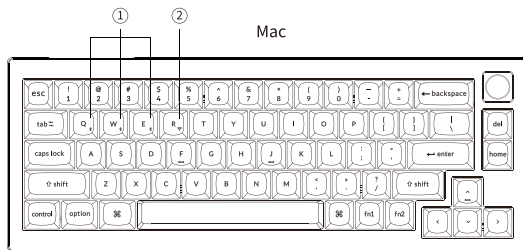


- ① Bluetooth Indicator
- ② 2.4G Indicator
- ③ G/Cable/BT (Mode Toggle)
- ④ Win/Android Mac/iOS (OS Toggle)
- ⑤ Type-C Port
- ⑥ Power Indicator

DEFAULT KEY LAYOUT:

LAYER 0: This layer will be activated when your keyboard's system toggle is switched to Mac.

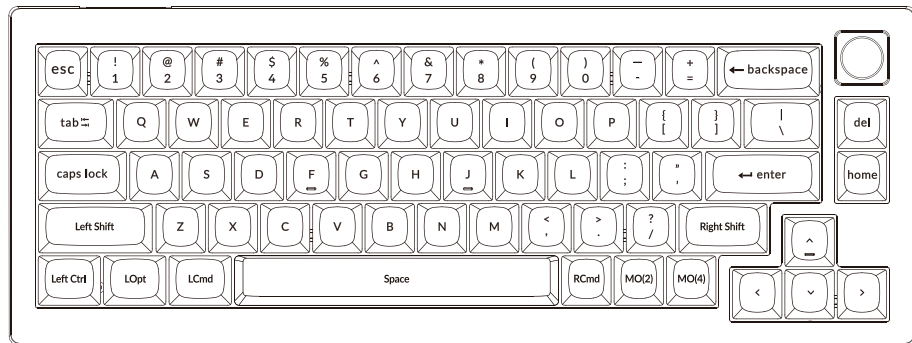

LAYER 1: This layer will be activated when your keyboard's system toggle is switched to Windows.

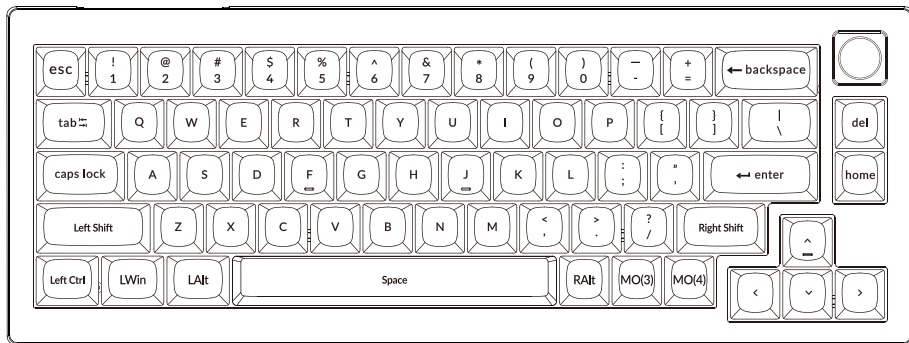

LWin = Left Windows LAlt = Left Alt RAlt = Right Alt

LAYER 2: This layer will be activated when your keyboard's system toggle is switched to Mac and press the fn1/MO(2) key.

