



INTRODUCTION

LUVODI LED Bathroom Mirrors, Make Life Polychrome

CONTENTS

01 Brand Introduction	PAGE (01)
02 Warm Note	PAGE (02)
03 Q & A	PAGE (02)
04 Product Introductions	PAGE (03)
05 Detailed Instruction of Functions	PAGE (04)
06 Product Parameters	PAGE (06)
07 Product Installation	PAGE (06)
08 Wiring Methods	PAGE (07)
Installation method of round/ oval mirror	PAGE (08)
Installation method of rectangular mirror	PAGE (09)

| Brand Introduction

WISFOR LED Bathroom Mirrors, Make Life Polychrome

We strive to deliver real value for our customers through distinctive design, superb quality and excellent customer service at prices that reflect the real worth of our products.

Anti-fogging/Dimmable Light/Memory Function/3 Year Warranty

Perfect choice for your bathroom, bedroom and makeup room.




- We strictly implement quality control to ensure that the products are 100% safe and qualified. If there is any problem when you receive the mirror, please feel free to contact us by email.
- If you are satisfied with the mirror, welcome to share it on social media. We look forward to your comments and video feedback as well as your suggestions for us.

Warm Note

1. Please make sure the power is cut off before wiring, use the waterproof tape for wiring.
2. If you have any confused questions about the mirror, you can e-mail us and we are willing to help you solve problem.
3. If you find the electronic component damaged, please contact us and we'll resend to you.

► If you have any suggestions or advice, please feel free to send e-mail to our customer services.

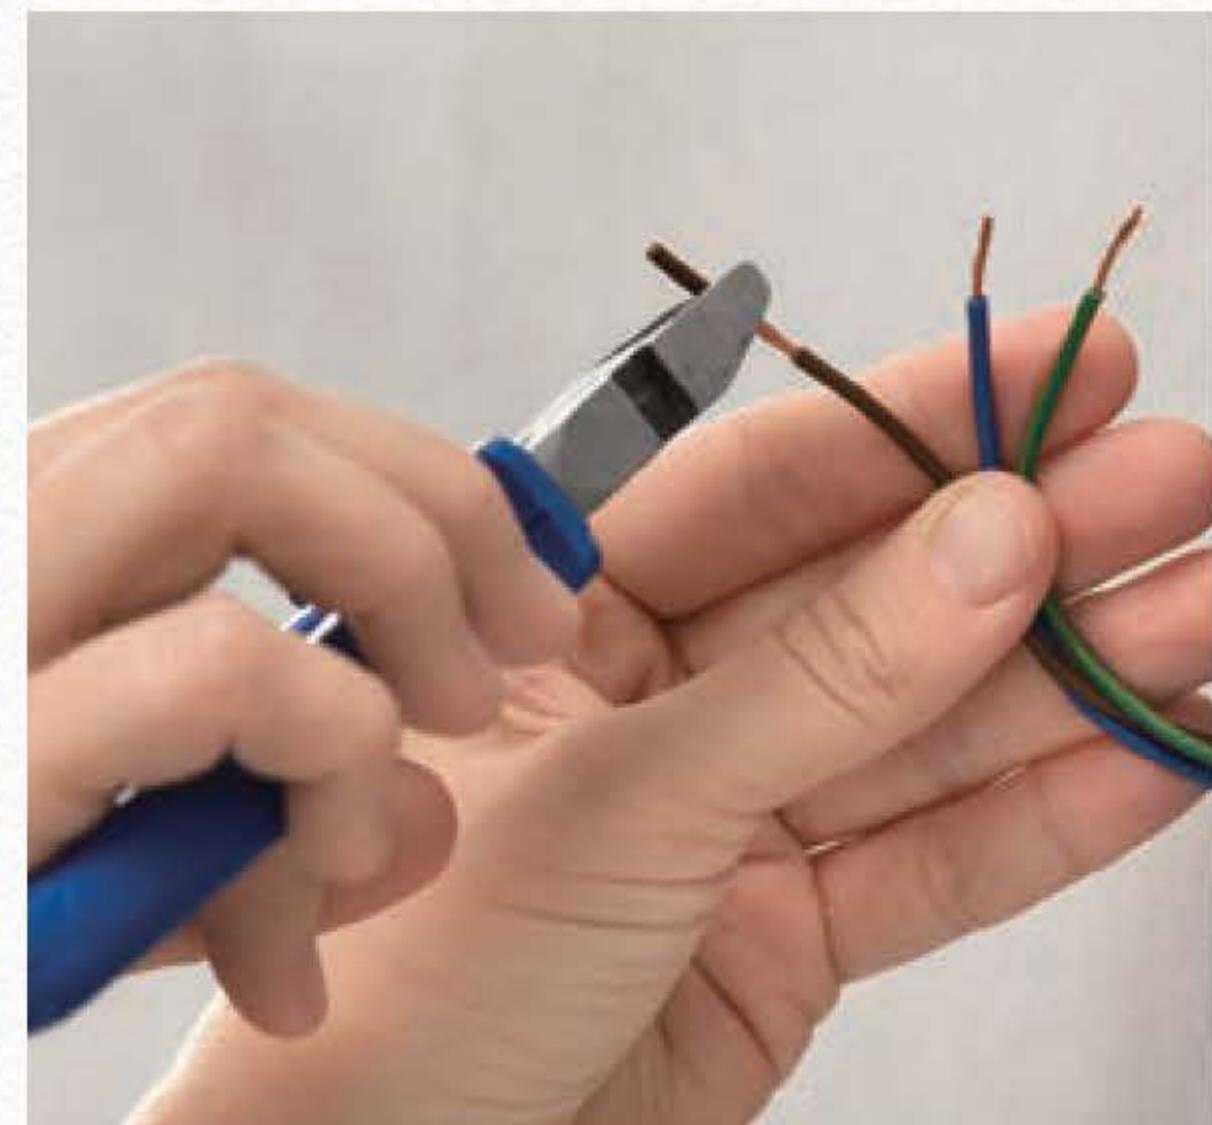

Q & A

After receiving the mirror, if you have any problem, please contact customer service at the first time. We will solve the problem for you within 48 hours and you have the chance to win a small prize

Q1: What if the mirror broken after you receive the package?

A: Please don't worry about it. Take a photo and contact our customer service, we will handle it within 48 hours for you.

Q2: The defog function does not work, how to do?

A: 1. Check whether the switch is turn on (white means turn on)
 2. The defog function need to be turned on after 5 minutes to work, please be patient.
 3. If it still can't work, please contact our customer service.

Q3: The bathroom mirror button does not work?

A: 1. Open the bathroom mirror back cover, check whether the switch is shifted, if switch shift, just restore the position.
 2. If it's a bad connection, please rewiring.

Q4: If the inner light strap of the bathroom mirror comes off?

A: Please don't worry about it, please contact our customer service, we will quickly help you to solve such problems.

Q5: The bathroom mirror doesn't work after wiring, how to do?

A: Please make sure the null line of wire connection is correct.

Q6: Bathroom cracks on the back of the mirror, what can you do?

A: Please contact our customer service, we will send a waterproof repair subsidy to you.

Q7: How to daily maintenance of the bathroom mirror?

A: You can use the dust cloth and wipe it with warm water.

| Product Introduction



1 Short press for On/Off; long press to adjust brightness; After all the lights are off, long press to turn off the screen, then short press to restore the display.

2 Short press to switch three color temperature (Cold White, Neutral, Warm Light).

3 Short press to turn on/ off the defog function. Long press to enter Settings mode, short press to select the next menu, then press and hold again to adjust it. While playing music, double-click to switch to the previous song.

4 Long press to turn on/ off the Bluetooth function, short press to play or pause. Double click to switch to the next song.

Four-Button Digital Display Switch + Wireless Bluetooth Audio Touch Button Description

1. Mode

2. Specifications

【2.1】 Input: DC12V

【2.2】 Strip output: less than 3.3A

【2.3】 Fog removal output: less than 4.0A

【2.4】 Input: 100-277V

【2.5】 Rated power: 24W-100W

3. Key Icon

【3.1】 The key is defined from left (outlet end) to right:

①Light control ② Color temperature control ③ Anti-fog control ④ Bluetooth control



4. Keys operation

【4.1】 Key functions

- ① Button: The little light icon will appear on the right side of the on/off button after clicking the on/off button , otherwise it is in off state
 - 1.1 After all the lights are off, long press to turn off the screen, then short press to restore the display.
 - 1.2 Short press the to turn on/ off the light.
 - 1.3 Long press the to adjust brightness, will be changed according to your adjustment.
- ② Button: Short press to switch three color temperature (Cold White - Neutral - Warm Light).

3. (W) Button:

3.1 Short press (W) for defog function of on/off, (The little defog icon will appear on the right side of after clicking the on/off button, otherwise the function is in off state.



3.2 Long press (W) to enter Settings mode, short press (W) to select the next menu, then press and hold again (W) to adjust it.

3.3 While playing music, double-click the (W) to switch to the previous song.

4. (B) Button: The little Bluetooth icon will flicker on the right side of after clicking the on/off button, otherwise the function is in off state.

4.1 Long press the (B) to turn on/ off the Bluetooth function.

4.2 Short press the (B) to play or pause.

4.3 Double click the (B) to switch to the next song.



after clicking

Settings Description

Long press (S) to enter the Settings mode, short press (S) to select the next menu, then press and hold again (S) to set it

【1.1】 Time Setting

The Settings are in the following order: Date(Month), Month(Date), Year, Time, Minute



Long press (S) to enter the Settings mode, then short tap (S) to set the time, the digits on the screen flashing. Tap the (S) to change the digits, long tap it to switch to the next option

【1.2】 Date Setting (Date - Month - Year or Month - Date - Year)

Long press (S) to enter the Settings mode, short press (S) once for date setting option, then long tap (S) to set the date

USA: Month - Date - Year

EUR: Date - Month - Year

【1.3】 Hour System Setting (12/24 Hours)

Long press (S) to enter the Settings mode, short press (S) twice for hour system setting option, then long tap the (S) to set the hour system, short tap the (S) to switch to 12H or 24H, "AM" and "PM" will display on the screen, then long press the (S) to save and exit.

【1.4】 Temperature Unit Setting (OF/OC)

Long press (S) to enter the Settings mode, short press (S) three times for temperature unit setting option, long tap (S) to enter, then press the (S) to choose Fahrenheit (OF) / Celsius (OC), the unit value on the screen will be changed according to your choice, then long press the (S) to save.



5. Remarks

【5.1】 Please use your mobile phone to adjust the volume if you need to adjust it while playing the music.


Detailed Parameters

Product Name	Specification
Watt Range	24w-100w
Operating Temperature	-30°C to 75°C
LED Light Temperature	3000k to 6500k
Input Voltage	100-277V
Output Voltage	12V
Product Certification	CE UKCA UL SAA PSE
Waterproof Rating	IP56
Service Life	>20000HRS
CRI	≥80RA



Product Installation

Recommend Height

1. When installing the bathroom mirror, please first pick up the bathroom mirror and confirm the best installation height for marking, then punch for installation
2. Make sure your face is in the middle of the mirror for a better image.


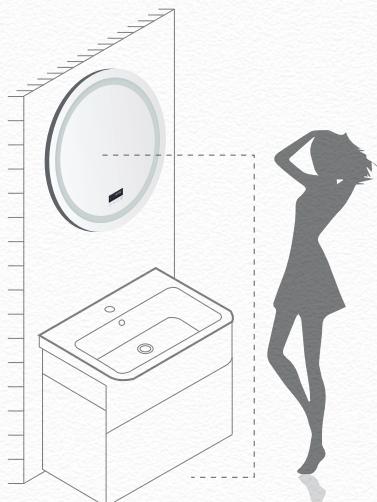


I Wiring Method

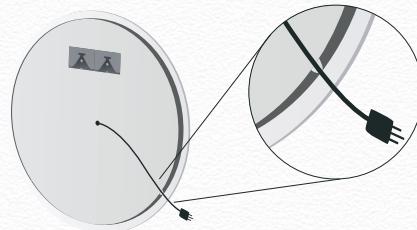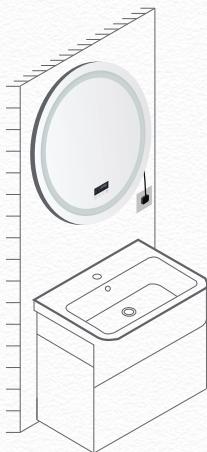

Method 1

Extend the line of the bathroom mirror from the grooves on the side and plug it in to use.

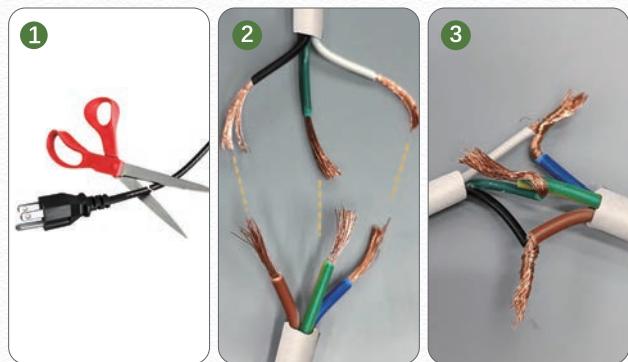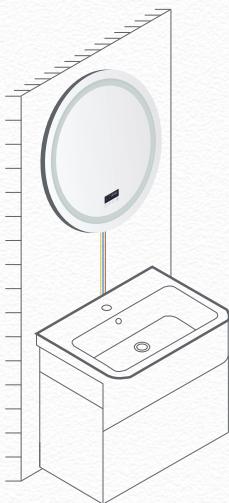

Method 2

Cut off the plug of bathroom mirror with scissors and connect the reserved thread.

	AU	US	EU	UK	TP	JP
L						
N						
E						

I Round /Oval Bathroom Mirror Installation



Tape Measure



Pencil



Drill



Hammer




Screwdriver




Screw Kit (Set)




1.Measure the distance of the bathroom mirror hook.

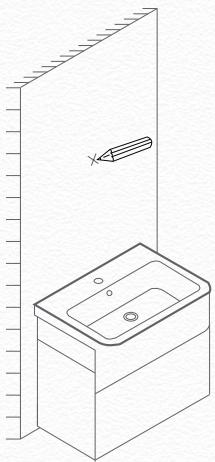


2.Lidt the bathroom mirror up to confirm the best mounting height.

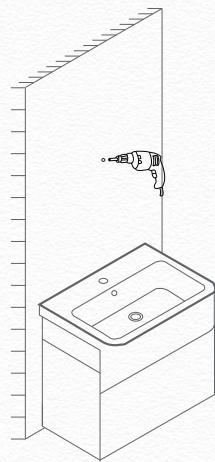


3.Mark the wall with a pencil.

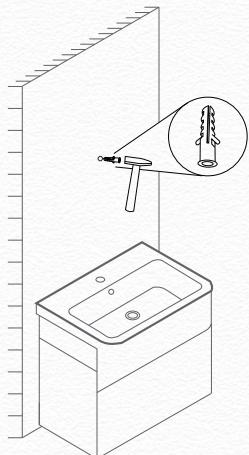

4.Drill the marks with an electric drill.

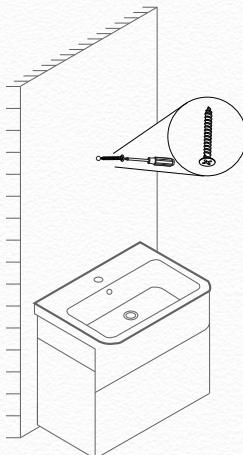

5.Drive a screw and an expansion plug into the hole.

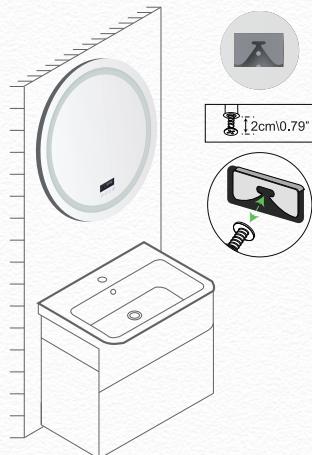

6.Hang up the bathroom mirror.

Square Bathroom Mirror



Tape Measure



Pencil



Drill




Hammer



Screwdriver




Screw Kit (Set)

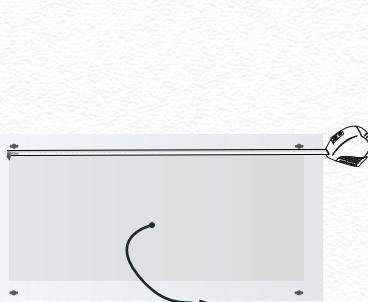


1. Measure the distance of the bathroom mirror hook.




2. Lift the bathroom mirror up to confirm the best mounting height.

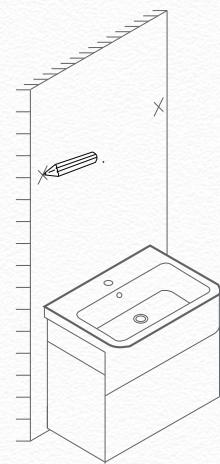


3. Mark the wall with a pencil.

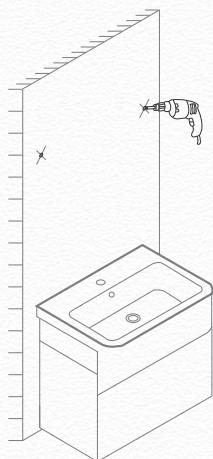

4. Drill the marks with an electric drill.

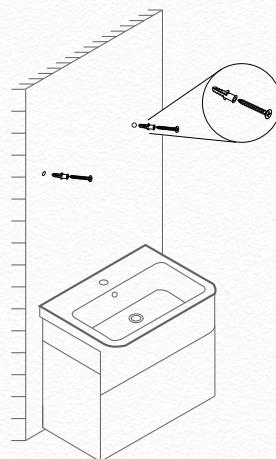

5. Drive a screw and an expansion plug into the hole.

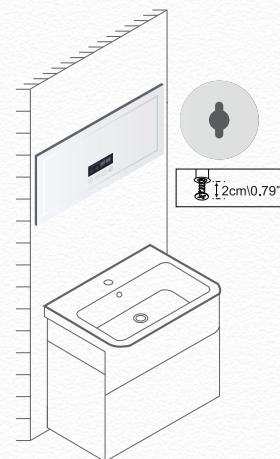

6. Hang up the bathroom mirror.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



NOTE 2:

Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure Statement

To maintain compliance with FCC'S RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm between the radiator and your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.



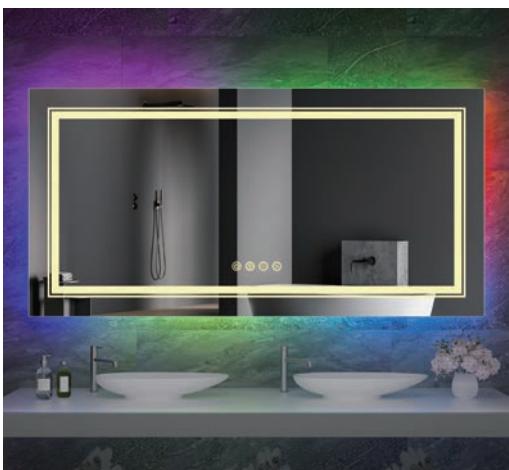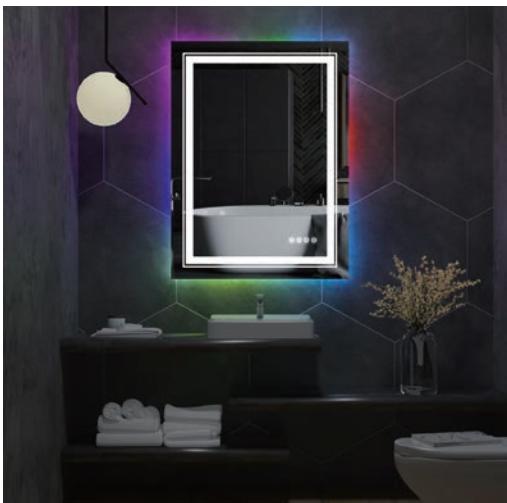





WISFOR

WISFOR LED Bathroom Mirrors, Make Life Polychrome