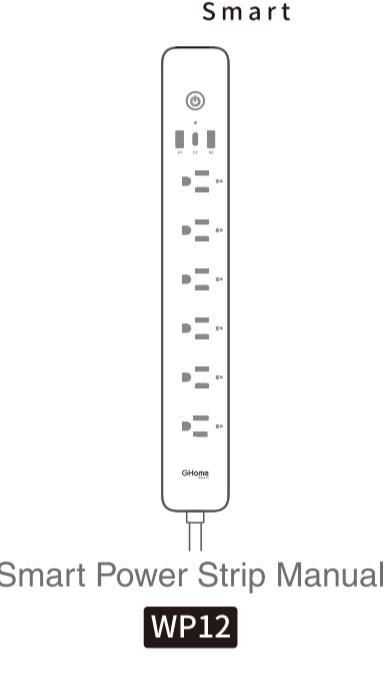
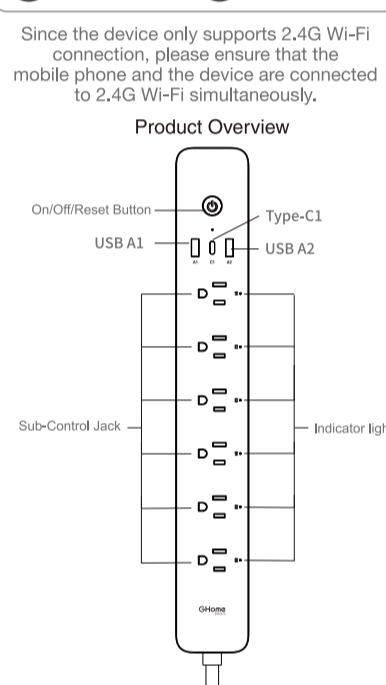
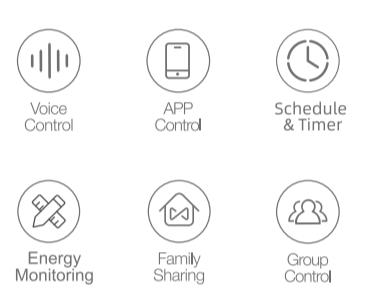


# 说明书

<p><b>GHome Smart</b></p>  <p>Smart Power Strip Manual WP12</p>	<p><b>2.4G Wi-Fi Ready</b> <b>5G Wi-Fi Not supported</b></p> <p>Since the device only supports 2.4G Wi-Fi connection, please ensure that the mobile phone and the device are connected to 2.4G Wi-Fi simultaneously.</p> <p><b>Product Overview</b></p>  <p>On/Off/Reset Button, Type-C1, USB A1, USB A2, Sub-Control Jack, Indicator light.</p>	<p>Note: ON/OFF button can also be used as a factory reset button- simply press and hold the button. Only do this if you want to erase the socket's current settings.</p> <p><b>Specification</b></p> <p>Input: 120V~50/60Hz 1800W Max Output: 15A Max USB ports: 30W Max C1:5V=3A 9V=3A 12V=2.5A 15V=2A 30W Max A1/A2:5V=3A 9V=3A 12V=2.5A 30W Max A1+A2:5V=3A 15W Max A1/A2+C1:5V=3A 15W Max A1+A2+C1:5V=3A 15W Max Supported protocols: PD3.0/2.0, QC3.0/3.0/2.0, BC1.2, AFC, FCP Wi-Fi: 802.11 b/g/n, 2.4GHz (only) Operating Temp.: -10°C~35°C Cable Length: 1.8m/70.86inch</p>	<p><b>Main Features</b></p>  <p>Voice Control, APP Control, Schedule &amp; Timer, Independent Control, Energy Monitoring, Family Sharing, Group Control, Surge Protection.</p> <p><b>How to Pair with the App</b></p> <ol style="list-style-type: none"><li>Open the "Gosund" app and create your Gosund account.</li><li>Turn on the plug and place it near the router when pairing.</li><li>Hold the ON/OFF button for 5 seconds and release it when the plug starts to blink slowly to enter the network pairing mode.</li></ol> <p>Connect your phone to the Wi-Fi router, and click the "+" at the top right corner of the homepage to add a device. You can add a device in two ways: 1) Bluetooth Auto-Discovery Mode (Recommended) The app will suggest you turn on Bluetooth and Wi-Fi on your phone, and then select the device you want to add. Enter your Wi-Fi name and Wi-Fi password (supports 2.4G Wi-Fi only), and it will automatically connect to the network. 2) "Slow Flash" Mode (AP) If Bluetooth networking fails, you can try AP networking mode. Select "WP12" under "Electrician", enter your Wi-Fi name and Wi-Fi password (supports 2.4G Wi-Fi only), choose "Slow Blink" to ensure the LED indicator blinks slowly, connect your phone to the device hotspot: "SmartLife-XXXX", then return to the app interface, it will automatically connect to the router, completing the configuration.</p> <p><b>How to Download the Gosund App</b></p> <p>Option 1: Search for "Gosund" in the Apple APP Store or Google Play. Option 2: Scan the QR code to enter the download page.</p> 	<p><b>FCC WARNING</b></p> <p>Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p>Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: -Reorient or relocate the receiving antenna. -Increase the separation between the equipment and receiver. -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -Consult the dealer or an experienced radio/TV technician for help.</p> <p>This device complies with part 15 of the FCC Rules.</p> <p><b>Manufacturer:</b> Shenzhen Cucco Smart Technology Co., Ltd. <b>Address:</b> Room 201, 301, Building A, No.12 Difu Road, Guxing Community, Xixiang Street, Bao'an District, Shenzhen, 518000, Guangdong, P.R. China <b>Contact Information:</b> E-mail: service@ghomesmart.com Tel: 1-844-394-5218 PST 9AM-5PM (Monday-Friday) Website: <a href="https://ghomesmart.com/">https://ghomesmart.com/</a></p> <p><b>FC</b> <b>CE</b> <b>RoHS</b> <b>PAP</b> <b>WEEE</b> <b>REACH</b> Made in China FCC ID:2BHSG-WP12</p> <p>4.02.000.1128 V2.0</p>
--	---	--	---	---

**CUCO 深圳市酷客智能有限公司**

品牌名: GHome smart	名称: WP12美规说明书	制图人: 解搏君
型号: WP12	比例 (1: 1)	单位 (mm)
物料编码:4.02.000.1128	版本: V2.0	日期: 2024/05/30
尺寸: 80x110mm 材质: 128g哑粉/单黑/风琴折		产品审核: 领导审批: 戴站华