

尺寸:70x100MM
材质: 128G双铜
工艺: 4色印刷
骑马订 35P

Cirro®

Digital Camera

User Manual

D01



■ Preface

Thank you for purchasing Cirro D01 digital camera. Please read this manual before operating the product. After you have finished reading this manual, please store it in a safe place for future reference.

The contents of this user manual accurately reflect the latest information available during its development. The screen shots, illustrations, and supplementary materials contained herein serve as comprehensive guides to help you navigate the camera's operations. Please be aware that due to ongoing technological advancements and slight variations in production runs, there might be minor discrepancies between the depictions in this manual and the actual appearance or functionality of your digital camera.

Disclaimer: While significant efforts have been undertaken to maintain the accuracy and comprehensiveness of this manual, we cannot provide absolute assurance that it is entirely devoid of errors or omissions.

Contents

Getting Started

Check the camera and accessories

Standard list 1

Battery installation / Removal and installation for
battery charging 1

Battery charging 3

Battery precautions 3

Memory card

Installation of memory card 4

Usable memory card 4

Format memory card 4

Change camera settings

Turn on the camera 6

Set date/time 6

Language setting 6

Submenu of system setting 6

Take a photograph

Take still images 7

Recording video 7

Basic operation of this camera

Appearance Description 8

Shooting mode 9

Shooting menu settings	9
Take still images menu	10
Slow Motion/Time-Lapse mode	10
Video pause	10
PlayBack mode.....	10
Power OFF	10
Connect computer and webcam	11
Charging mode.....	11
PC mode	11
Usage notice	
Safety Precautions	11
Camera cleaning and maintenance	12
Troubleshooting	
Unable to charge.....	12
Insufficient battery duration	12
Unrecognized Memory Card	13
Unable to Format Memory Card	13
Fails to focus	13
Unable to connect to computer	13
Customer Support	14



Getting Started

Check the camera and accessories

① Standard list

Digital Camera*1	Micro USB Cable*1
Battery*1	Manual*1

Tip:

Due to different sales regions, accessories may vary. For detailed information, please consult the dealer.

Removal and Installation for Battery Charging

② Installing / removing the battery



1. Pull down to open the battery bay



2. pull down battery buckle.



3. Keep the battery facing the same direction as the camera face as shown in the picture - (Installing the battery in the opposite direction will prevent charging), and then install the battery.



4. Push up to close the battery bay.



◎ Battery charging

(1) When charging this camera, use a micro USB cable to connect the power adapter to the camera. During charging, the red light will remain on, and it will turn off once the battery is fully charged.



Tip: The camera will automatically turn on when charging. However, the battery will charge faster if the camera is turned off during charging.

(2) Battery charging time (estimated)

In a normal environment, it takes 2 hours for the battery to be fully charged.

(3) Continuous working hours (estimated)

When [system] are factory default settings, it can work for 1 hours.

◎ Battery precautions

It is recommended to start charging the battery within a temperature range of 10°C to 30°C. In lower temperatures, the battery may not charge fully or may require additional time to do so. When charging in higher temperatures, it may negatively impact the battery's lifespan.

A fully charged battery will naturally deplete its electricity over time. To ensure sufficient power, it is recommended to charge the battery in advance.

When the camera is not in use for an extended period, please charge the battery every 3 months and then allow it to discharge completely to help maintain its battery life.

Memory card

Installation of memory card



Please insert the SD card into the card slot correctly. Inserting the wrong card or inserting it incorrectly may cause damage to both the SD card and the card slot.


Tip: Please align the 'Label face' of the SD card with the direction of the camera lens as shown in the illustration, and then proceed to install the SD card.

Usable memory card

This camera is compatible with two types of memory cards: SDHC (Class 10) and SDXC (Class 10), supporting capacities up to 128GB.

Format memory card

It is recommended to format the memory card before first use in this camera, as failure to do so may result in issues such as inability to record. Upon first inserting the memory card into this camera, a format window will automatically pop up. As shown in the figure.

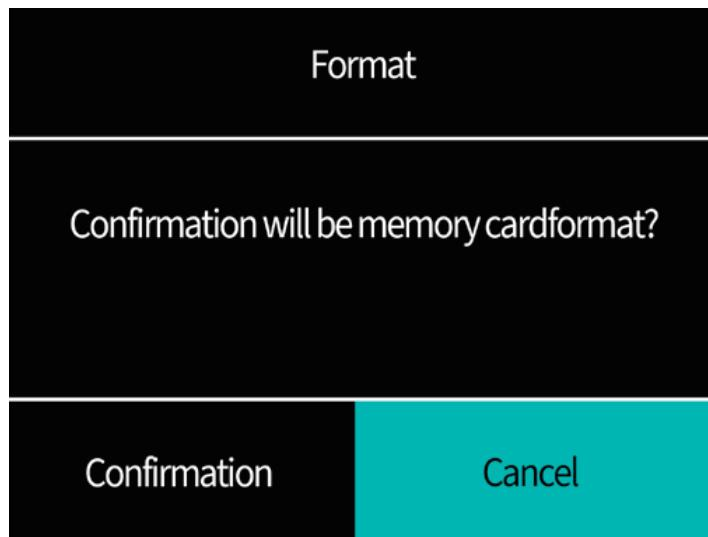


You can also access the system menu of this camera, navigate to the sub-menu "Format", press the OK button, and proceed to the format window shown above to perform formatting. Alternatively, you can format the memory card on your computer.

Change camera settings

Turn on the camera

Upon pressing the power button, the working indicator light illuminates, the screen turns on, and the camera boots up.

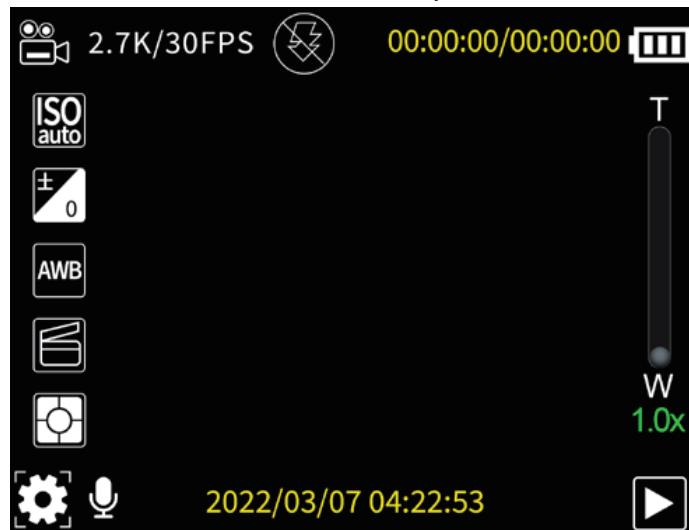

Set date/time

Press "MENU" twice to enter the system settings menu. Use the Down button to navigate to the "Time Set / Date Set" submenu, and press "OK" to set the corresponding date and time.

◎ Language setting

Navigate to the System Settings, press the Down button to locate the "Language" submenu, and then press the "OK" button to select the appropriate language.

◎ Submenu of system setting

Sub-menu	Menu content
Exposure	-3/-2/-1/0/1/2/3
White Balance	Auto/Sunny/Cloudy/Incandescent/Fluorescence
Scene	Auto / Sport / Portrait / Landscape / Dusk / Beach
Metering Mode	Average Metering/Center Metering/Spot Metering/Matrix Metering
ISO	Auto/100/200/400/800/1600/3200
Image Rotation	Turn On/Turn Off (Press OK to switch)
Frequency	Auto/50Hz/60Hz
LED Indicator Light	Turn On/Turn Off (Press OK to switch)
Auto Screen Saver	Turn Off/30s/1min/2min
Volume	High/middle/low/close
Startup Music	Open/Close
Auto Shut down	Turn Off/3min/5min/10min
Time Watermark	Turn On/Turn Off (Press OK to switch)
Language	Simplified Chinese/traditional Chinese/English/Japanese/Korean/Russian/German/French/Italian/Spanish/Portuguese/Thai
Date-Time	YYYY/MM/DD 00:00:00
Format	Format/Cancel
Firmware Version	Product model and version number
Factory Reset	Confirm/Cancel



Take a photograph

Take still images


This section explains that in the normal camera mode, the camera automatically recognizes the scene to determine the exposure and other settings. Use the Mode button to select the photo mode, press the shutter button halfway to focus. When the focus frame on the display turns green, fully press the shutter button to take the photo.


Recording Video

This section explains that in the normal recording mode, the camera automatically recognizes the scene to determine the exposure and other settings. Use the Mode button to select the shooting mode, press the record button to start recording. Press the record button again to stop the video recording.

Basic operation of this camera

Appearance Description

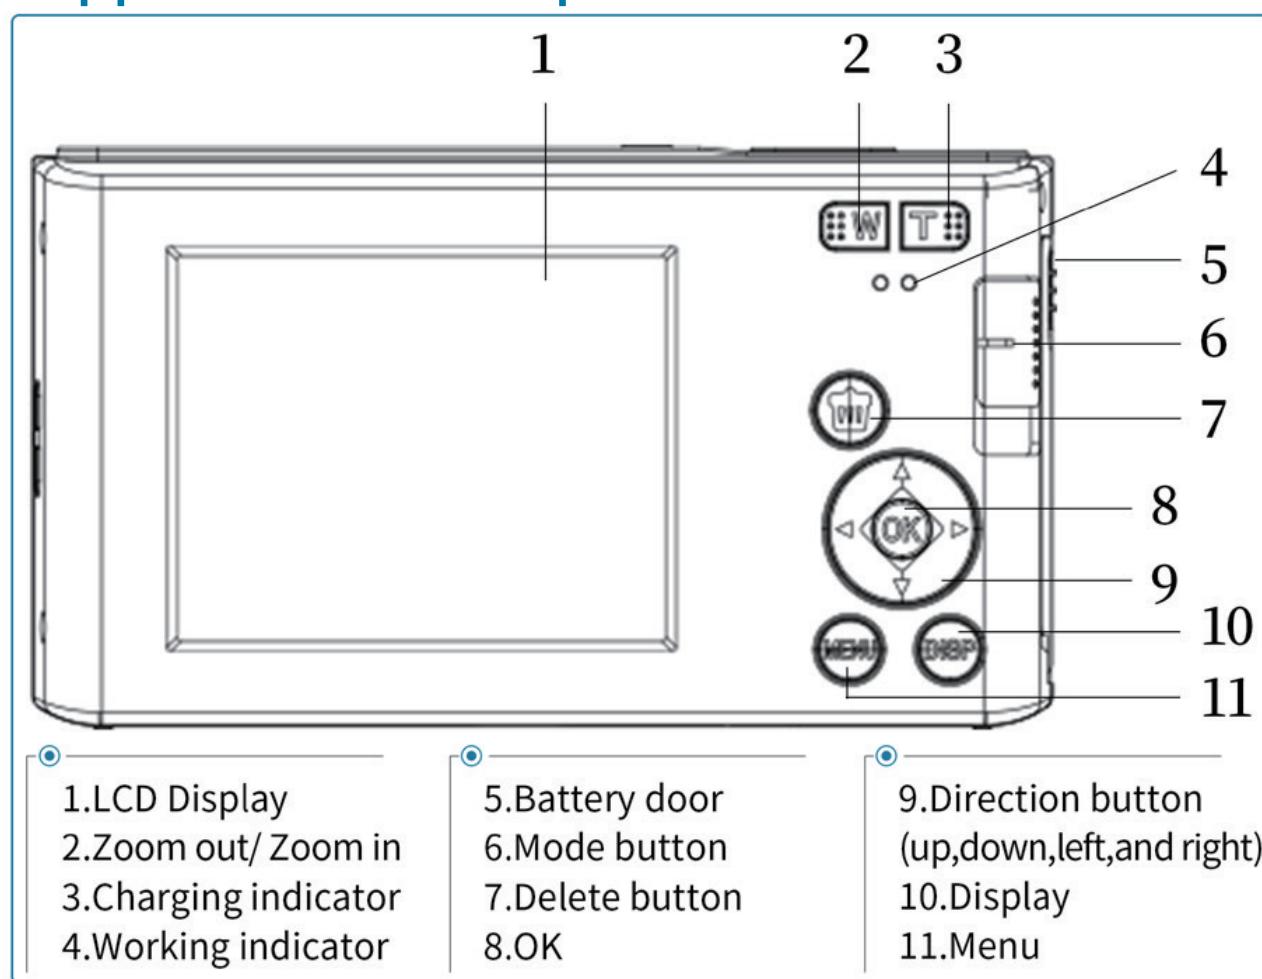

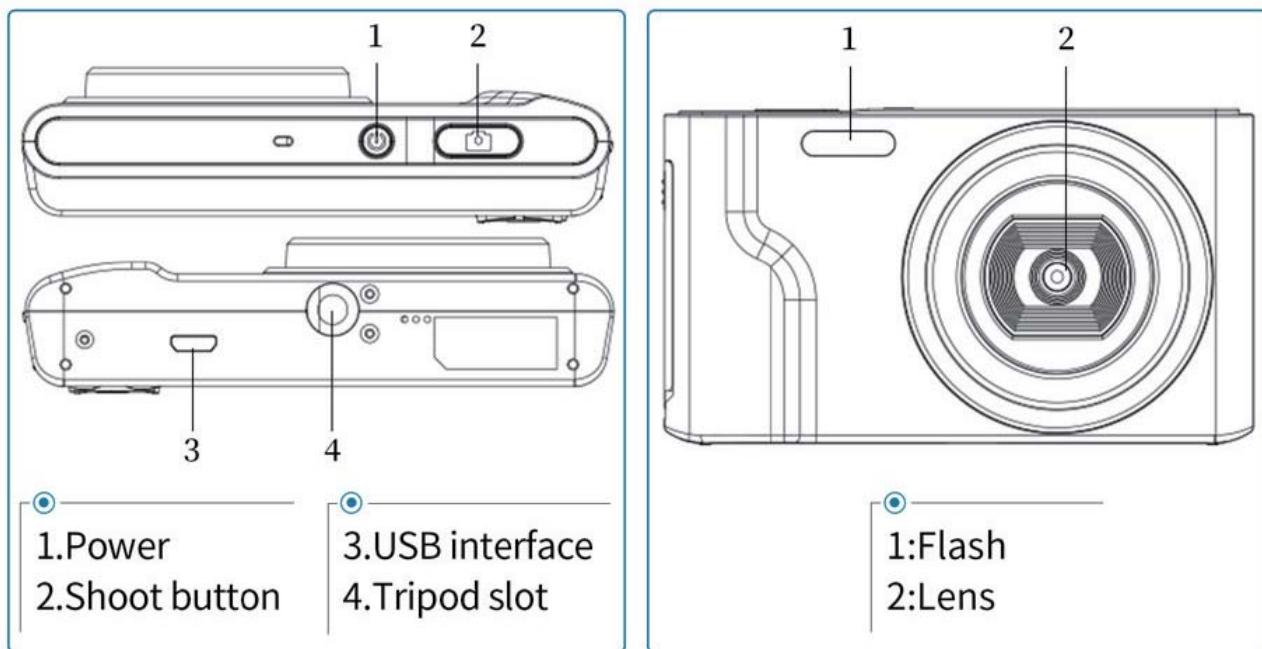

Shooting mode

Press the Mode button to select the appropriate mode, then press the Menu button to navigate to the submenu - Record (Photo) Mode. The reference information corresponding to this mode is as follows.

Icon	Mode button	Mode	Illustrate
	Shooting video	Normal	Normal recording mode
	Slowly	Slow motion shooting	
	Loop	Loop shooting	
	Lapse	Fast action shooting	
	Take still images	Normal	Take a single photo normally
	Timer	Take a single photo after a specified number	
	Burst	Take a specified number of photos continuously	
	Auto	Automatically cycle to take pictures after a specified number of seconds	
	Playback		Play the video or photo



Shooting menu settings

After selecting the corresponding mode, press the menu button to enter the shooting mode setting menu.

Sub-menu	Menu content
Record Mode	Normal / Slowly / Loop / Lapse
Recording Sound	Open/Close
Lapse video	Open/Close
Loop	Open/Close
Slow Motion	Open/Close

Take still images menu

Sub-menu	Menu content
Timed	Close/3S/5S/10S/20S
Auto	Open/Close
DramaShot	Open/Close
Photo Quality	General/good/very good

Slow Motion/Time-Lapse mode

It is used to capture moments that cannot be discerned by the naked eye (slow-motion shooting) or to condense a lengthy phenomenon into a shorter time span for recording (time-lapse shooting). It enables the recording of intense sports scenes, the instant of birds taking flight, the emergence of flower buds, and the transformation of clouds and stars. Note that sound is not recorded. Select the Slowly motion mode / Time-Lapse mode, and press the shoot button to start recording. To stop recording, press the shoot button again.

■ Video pause

This camera supports video pause. During recording, press the power button to pause the recording, and press it again to resume recording. If you press the shoot button, the recording will end.

Tip: The recorded long video will be automatically saved on the memory card in segments, each file named as ***0000-***000X.

■ PlayBack mode

Press the Mode button to enter playback mode, and then use the Left or Right button to navigate through the photos or videos. Press the delete button to select whether to delete the currently displayed photo or video.

■ Power OFF

Long press the POWER button to turn off the digital camera. If you enable the auto shut-off feature in the menu, the digital camera will automatically turn off after more than 3 minutes/5 minutes/10 minutes of inactivity, helping to conserve power when not in use.

■ Connect computer and webcam

Connect the camera to an available USB port on the computer using the micro USB cable. Upon insertion, the camera will power on automatically. Use the up and down buttons to select between Charging Mode, Storage Mode, or PC Mode, and press OK to enter the selected mode.

■ Charging mode

In Charging Mode, all functions of the camera can be used normally. Additionally, the camera supports recording videos while being charged in Storage Mode.

When the storage mode is selected, a new removable storage device will appear in the "My Computer" window, allowing for the transfer of photos and video files from the camera to the computer.

Note: Do not disconnect the USB connection while downloading the file. Avoid plugging and unplugging the memory card while the USB is connected to prevent data loss.



PC mode

When PC mode is selected, the camera can be used as a webcam.

Tip: If the camera fails to activate after connection, please navigate to the Device Manager on your computer. Locate the Imaging Devices section or the Camera menu, and check if a "UVC Camera" device is listed among the connected devices. If you're using a laptop equipped with an integrated webcam, you'll need to disable that webcam first before you can use the external camera as a webcam.

Usage notice

Safety Precautions

- (1) Do not disassemble or modify the product.
- (2) If you notice smoke or an unpleasant odor emanating from any part of the camera, cease all operation immediately to prevent the risk of fire or electric shock. Promptly switch off the camera, remove its battery, or disconnect the power cord from the outlet. Ensure that the camera has ceased emitting smoke or the unpleasant odor before proceeding further.
- (3) Do not expose the camera to water or any other liquids, as it is not waterproof. In case the camera case comes into contact with liquid or saltwater, please dry it off immediately with a soft cloth. If water or any other material enters the camera, shut it down immediately and remove the battery or unplug the power cord from the outlet to prevent damage.
- (4) Avoid triggering the flash too close to human or animal eyes, as prolonged exposure to intense light from close range can potentially damage vision. Please exercise caution and maintain a distance of at least 1 meter (39 inches) away from babies specifically.
- (5) Keep the camera and battery out of the reach of children.
- (6) Do not heat the battery or expose it to sources of ignition, as it may explode.

Camera cleaning and maintenance

- (1) If you do not use the camera for an extended period, please remove the battery and store it in a dust-free, dry location where the temperature does not exceed 30 °C.
- (2) To prolong the battery's lifespan, please ensure it is fully discharged prior to storage.
- (3) Please fully discharge the battery at least once every three months, following a full charge.
- (4) If there is dust or dirt on the lens or screen, gently wipe it with a clean, soft lens cleaning cloth.
- (5) As this machine is a precision instrument, please avoid dropping it or exposing it to strong impacts or vibrations.

Troubleshooting

◎ Unable to charge

- (1) If the charging indicator is not illuminated, it indicates that the charger is not properly plugged in. Please check if the charger is connected normally.
- (2) The battery is recommended for charging within a temperature range of 10°C to 30°C

◎ Insufficient battery duration

- (1) Check whether the battery is fully charged.
- (2) If the ambient temperature falls below 10°C, the battery will drain quickly.
- (3) Depending on the usage mode, the battery life will vary.

◎ Unrecognized Memory Card

- (1) Please check whether the memory card conforms to Class 10 SD card specifications, with a capacity of up to 128GB.
- (2) Please check if the memory card is inserted correctly.
- (3) The memory card was used in the camera for the first time without being formatted.



◎Unable to Format Memory Card

(1)If the SD card cannot be formatted in the camera, you can try formatting it on a computer before inserting it back into the camera.

(2)The memory card is not Class 10. You can try replacing it.

◎Fails to focus

(1)Avoid shaking the camera and keep it steady. The camera will automatically focus within 1-3 seconds.

(2)When the shooting distance is less than 3.3 feet, you can manually half-press the shutter button to focus. When shooting video, you need to keep pressing and holding it down.

◎Unable to connect to computer

(1)Please check whether the USB data cable is connected correctly.

(2)Please check whether the USB interface on the computer is working properly.

(3)Please check the compatibility of the computer system.

Dear customer:

Thank you very much for your support!

Customer satisfaction is our top priority, and we hope you are satisfied with our products. If you have any questions or need help, our professional customer service team will be happy to assist you.

You can contact us through the following email

E-mail:support@icirro.com

Follow us

Get more instructions!

www.icirro.com

■ 前書き

このデジタルカメラをお買い上げいただきまして、ありがとうございます。製品の操作をする前に、必ず本マニュアルをお読みください。本マニュアルの閲覧を終了したら、将来の参考のために安全な場所に保管してください。

本ユーザーマニュアルの内容は、開発時点での最新の情報を正確に反映しています。本書に含まれるスクリーンショット、イラスト、および補足資料は、カメラの操作をナビゲートする際の包括的なガイドとして機能します。しかしながら、技術の継続的な進歩および生産ランにおける若干の変動により、本マニュアルの記述とデジタルカメラの実際の外観または機能にわずかな不一致が生じる場合がありますので、ご了承ください。

免责声明（免責条項）： 本マニュアルの正確性と包括性を維持するために、大きな努力を払ってきましたが、完全に誤りや省略がないことを絶対的に保証することはできま

目次

入門を始める

カメラとアクセサリーをチェックしてください

標準アクセサリー 18

電池の取り付け/ バッテリ充電の取り外しと取り付け 18

バッテリ充電 20

電池の使用上の注意事項 20

メモリーカード

メモリーカードの設置 21

メモリーカードの使用 21

メモリーカードのフォーマット化 21

カメラの設定を変更する

電源をオンにする 23

日付/時間を設定する 23

言語の設定 23

システム設定のサブメニュー 23

写真を撮る

静止画を撮る 24

ビデオを録画する 24

カメラの基本操作

外観説明 25

撮影モード 26

撮影メニューの設定.....	26
静止画撮影メニュー	27
スローモーション/タイムラプスモード	27
ビデオを一時停止する.....	27
再生モード.....	27
電源を切る.....	27
パソコンとウェブカメラを接続する.....	28
充電モード.....	28
PC mode書面.....	28
使用上の注意事項	
安全上の注意事項.....	28
カメラの掃除とメンテナンス.....	29
故障の診断と対処	
充電できない.....	29
バッテリーの持続時間が不足している.....	29
認識できないメモリカード.....	30
メモリカードをフォーマットできない	30
フォーカスできない.....	30
コンピューターに接続できない.....	30
カスタマーサポート.....	31

入門を始める

■ カメラとアクセサリーをチェックしてください

◎ 標準アクセサリー

デジタルカメラ*1	USBケーブル*1
電池（でんち）*1	説明書（せつめいしょ）*1

ヒント:販売地域の違いにより、アクセサリーは異なる場合があります。詳細については、販売店までお問い合わせください。

■ 電池の取り付け/ バッテリ充電の取り外しと取り付け

◎ 電池の装着/取り外し



1. 引き下げてバッテリー室を開けます



2. バッテリーのバックルを引き下げる。



3. 画像に示すように、バッテリーをカメラの正面と同じ方向に向けておき（バッテリーを逆方向に装着すると充電できなくなります）、そしてバッテリーを装着してください。



4. “上に押してバッテリー室を閉じます”

◎ バッテリ充電

(1) ラを接続してください。充電中は赤いライトが点灯し続け、バッテリーが完全に充電されると自動的に消灯します。



ヒント:充電中にカメラは自動的に電源をオンにします。しかし、充電中にカメラをオフにすると、バッテリーの充電速度が速くなります。

(2) バッテリーの充電時間(推定)

通常の環境下では、バッテリーを完全に充電するには2時間かかります。

(3) 連続作業時間(推定)

工場出荷時のデフォルト設定であれば、[システム]は約1時間動作できます。

◎電池の使用上の注意事項

電池の充電は、温度範囲10°Cから30°Cの内で開始することをお勧めします。低温では、電池は完全に充電できないか、または追加の時間を必要とするかもしれません。高温で充電すると、電池の寿命に悪影響を及ぼす可能性があります。

満充電のバッテリーは時間の経過とともに電気を自然に消費します。十分な電力を確保するために、事前にバッテリーを充電することをお勧めします。

カメラを長期間使用しない場合は、3ヶ月ごとにバッテリーを充電し、その後完全に放電させるようにしてください。これによってバッテリーの寿命を維持できます

メモリーカード

◎メモリーカードの設置



SDカードをカードスロットに正しく挿入してください。間違ったカードを挿入したり、挿入方法が正しくないと、SDカードとカードスロットの両方にダメージを与える可能性があります。


ヒント:SDカードの「ラベル面」を図示に示すようにカメラレンズの方向と合わせて、SDカードの取り付けを続けてください。

◎メモリーカードの使用

このカメラは、SDHC（クラス10）とSDXC（クラス10）の2種類のメモリカードと互換性があり、最大128GBの容量をサポートします。

◎メモリーカードのフォーマット化

このカメラで初めて使用する前にメモリカードをフォーマットすることをお勧めします。フォーマットをせずに使用すると、録画できないなどの問題が発生する可能性があります。メモリカードを初めてこのカメラに挿入すると、フォーマットウィンドウが自動的にポップアップ表示されます。図に示すように。

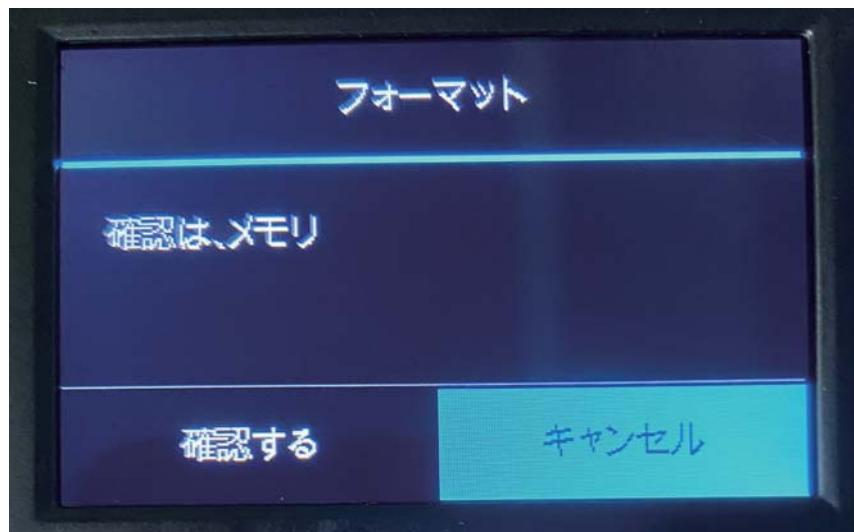


また、このカメラのシステムメニューにアクセスし、サブメニューの「フォーマット」に移動し、OKボタンを押して、上記に示すフォーマットウィンドウに進み、フォーマットを実行することもできます。また、コンピューターでメモリカードをフォーマットすることもできます。

■ カメラの設定を変更する

◎ 電源をオンにする

電源ボタンを押すと、作業インジケータライトが点灯し、画面がオンになります。カメラが起動します。

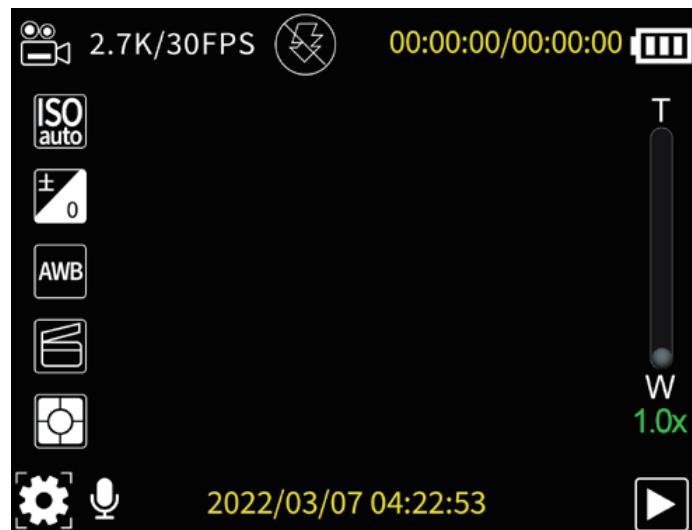

◎ 日付/時間を設定する

「MENU」を二度押して、システム設定メニューに入ります。ダウンボタンを使って「時間設定/日付設定」のサブメニューに移動し、対応する日付と時間を設定するには「OK」を押してください。

◎ 言語の設定

システム設定に移動し、ダウンボタンを押して「言語」サブメニューを探し、その後「OK」ボタンを押して適切な言語を選択してください。

◎ システム設定のサブメニュー

サブメニュー	メニューの内容
ろしゅつする	-3/-2/-1/0/1/2/3
ホワイトバランス	じどうしゃ/からりと開けた/曇りがち/白熱した/蛍光
シーン	じどうしゃ/うんどう/フィギュア/風景/たそがれ/ピーチ
測光モード	へいきんそっこう/ちゅうしんそっこう/てんそくこう/マトリックス測光
ISO	じどうしゃ/100/200/400/800/1600/3200
画像の反転	開く/オフ(OKキーを押して切り替え)
光源周波数	じどうしゃ/50Hz/60Hz
LEDインジケータ	開く/オフ(OKキーを押して切り替え)
じどうスクリーン セーバー	オフ/30S/1分/2分
キュートーン	音量を大きくする/音量を適度に調節する/音量を小さくする/閉じる
電源を入れる音	開く/オフ
自動シャットダウ	オフ/3分/5分/10分
時間透かし	開く/オフ(OKキーを押して切り替え)
言語	簡体字中国語/繁体字中国語/英語/日本語/韓国語/ロシア語/ドイツ語/フランス語/イタリア語/スペイン語/ポルトガル語/タイ語
日付-時間	YYYY/MM/DD 00:00:00
書式設定	書式設定/キャンセル
ソフトウェアバ ージョン	製品型番/バージョン番号
出荷時設定	確認/キャンセル

写真を撮る

◎ 静止画を撮る


このセクションでは、通常のカメラモードでカメラは自動的にシーンを認識し、露出やその他の設定を決定することを説明しています。モードボタンを使って写真モードを選択し、シャッターボタンを半分押ししてフォーカスを合わせます。ディスプレイ上のフォーカスフレームが緑色に変わったら、シャッターボタンを完全に押して写真を撮ります。


◎ 日付/時間を設定する

このセクションでは、通常の録画モードでカメラは自動的にシーンを認識し、露出やその他の設定を決定することを説明しています。モードボタンを使って撮影モードを選択し、録画ボタンを押して録画を開始します。録画ボタンを再び押してビデオ録画を停止します。

カメラの基本操作

外観説明

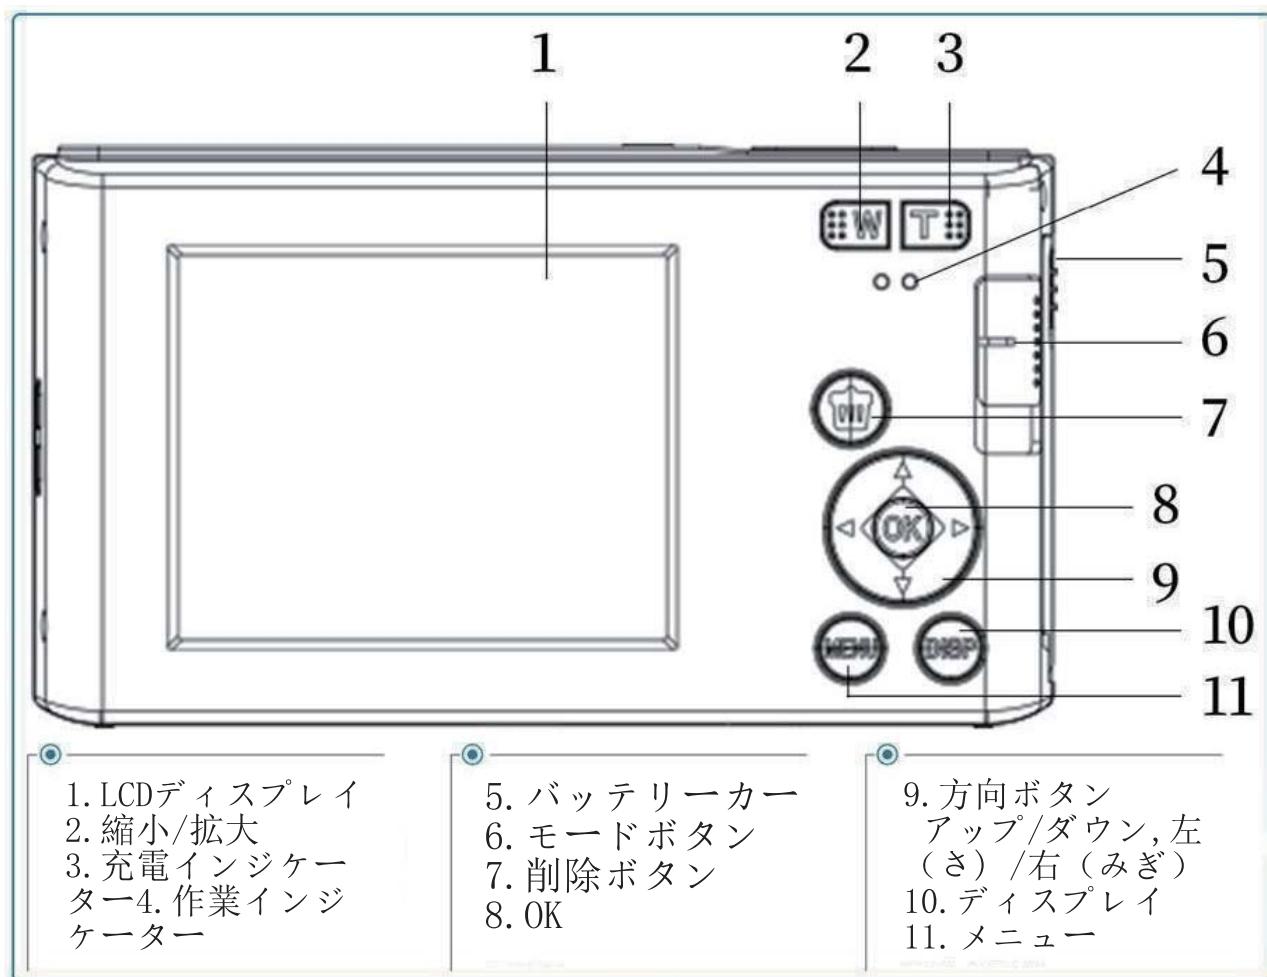

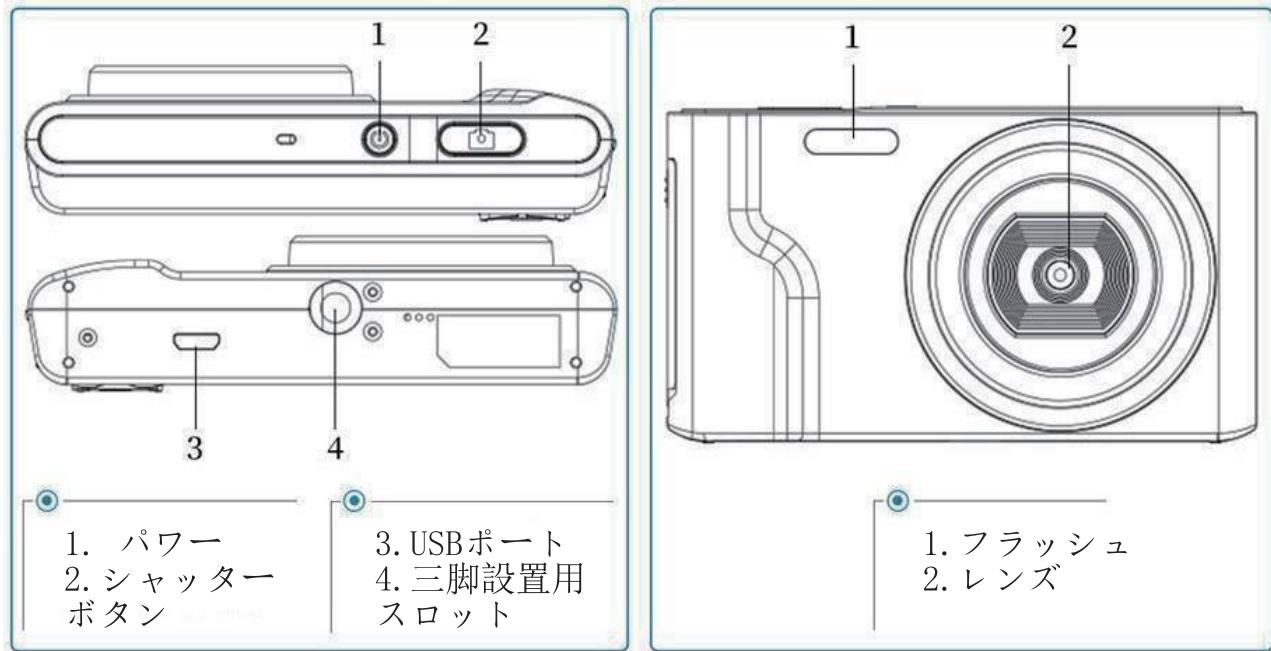

撮影モード

モードボタンを押して適切なモードを選択し、次にメニュー ボタンを押してサブメニュー「記録（写真）モード」に移動します。このモードに対応する参照情報は以下のとおりです。•

アイコン	キーを押す	パターン#パターン#	説明
	ビデオ録画	通常	通常の録画モード
		スローモーション	スローモーション録画
		ループオーバーレイ	ループオーバーレイ録画
		ディレイ撮影	ディレイ撮影
	写真を撮る	通常	通常の1枚の写真撮影
		定時撮影	設定した時間後に写真を1枚撮る
		れんぞくしゃしん	設定数の写真を連続撮影する
		じどうしゃしん	設定した時間後に自動的に写真を撮る
	再生		ビデオや画像の再生

■ 撮影メニューの設定

選択したモードの後、メニューボタンを押して撮影モード設定メニューに入ります。

サブメニュー	メニューの内容
録画モード	通常/スローモーション/ループオーバーレイ/ディレイ撮影
ビデオサウンド	開く/閉じる
ちえんしゃしん	開く/閉じる
ループオーバーレイ録画	開く/閉じる
スローモーション録画	開く/閉じる

■ 静止画撮影メニュー

サブメニュー	メニューの内容
定時撮影	閉じる/3S/5S/10S/20S
じどうしゃしん	開く/閉じる
れんぞくしゃしん	開く/閉じる
画像の品質	一般/よし/すばらしい

■ スローモーション/タイムラプスモード

これは肉眼で見分けられない瞬間（スローモーション撮影）をキャプチャーする、または長時間の現象を短時間に圧縮して記録する（タイムラプス撮影）ために使用されます。それは激しいスポーツシーン、鳥の飛び立ちの瞬間、花蕾の出現、雲や星の変化などを記録することができます。ただし、音声は録音されません。スローモーションモード/タイムラプスモードを選択し、撮影ボタンを押して録画を開始します。録画を停止するには、もう一度撮影ボタンを押します。

■ ビデオを一時停止する

このカメラはビデオの一時停止をサポートしています。録画中に電源ボタンを押すと録画を一時停止し、再び押すと録画を再開できます。もし撮影ボタンを押すと、録画は終了します。

ヒント:録画された長いビデオは自動的にメモリーカードに区切りごとに保存され、各ファイルは* **0000-***000Xとして名前が付けられます。

■ 再生モード

モードボタンを押して再生モードに入り、左または右ボタンを使って写真やビデオを閲覧します。削除ボタンを押して、現在表示されている写真またはビデオを削除するかどうかを選択します。

■ 電源を切る

電源ボタンを長押ししてデジタルカメラをオフにします。メニューで自動電源オフ機能を有効にすると、デジタルカメラは3分/5分/10分以上操作されないと自動的にオフになります。使用中でないときに電力を節約できます。

■ パソコンとウェブカメラを接続する

マイクロUSBケーブルを使用して、カメラをコンピューターの空きUSBポートに接続します。挿入すると、カメラは自動的に電源をオンになります。上下ボタンを使って、充電モード、ストレージモード、またはPCモードのいずれかを選択し、OKを押して選択したモードに入ります。

■ 充電モード

充電モードでは、カメラのすべての機能を通常通り使用できます。さらに、ストレージモードで充電中でもビデオの録画をサポートしています。

ストレージモードを選択すると、「マイコンピューター」ウィンドウに新しい取り外し可能なストレージデバイスが表示され、カメラからコンピューターへの写真やビデオファイルの転送が可能になります。

注意: ファイルをダウンロード中はUSB接続を切斷しないでください。USBが接続されている間にメモリーカードを挿入または抜き差しをしないようにして、データの損失を防ぎます。

PC mode書面

PCモードを選択すると、カメラはウェブカメラとして使用できます。

ヒント:もし接続後カメラが起動しない場合は、コンピューターのデバイスマネージャーに移動してください。イメージングデバイスセクションまたはカメラメニューを見つけ、接続されたデバイスの中に「UVCカメラ」デバイスがリストされているかどうかを確認してください。もしラップトップを使用していて、内蔵のウェブカメラを装備している場合は、外部カメラをウェブカメラとして使用する前に、まずそのウェブカメラを無効にする必要があります。

使用上の注意事項

全上の注意事項

- (1) 製品を分解または改造しないでください。
- (2) カメラのどこから煙が出るか不快なにおいが漂っているのを発見した場合は、火災や電気ショックのリスクを防ぐするためにすぐに操作を中止してください。カメラを早めにオフにし、バッテリーを取り外し、または電源コードをアウトレットから抜き差しをしてください。さらに操作を進める前に、カメラが煙や不快なにおいを放出を止めていることを確認してください。
- (3) カメラは防水機能を持たないため、水やその他の液体にさらすことはできません。もしカメラケースに液体や塩水が触れた場合は、すぐに柔らかい布で拭き干してください。もし水や他の物質がカメラに入り込んだ場合は、すぐにカメラをシャットダウンし、バッテリーを取り外し、または電源コードをアウトレットから抜き差しをして、損傷を防ぎます。
- (4) 人間や動物の目の近くでフラッシュを発火しないように注意してください。近距離での強光に長時間さらされると、視力に悪影響を与える可能性があります。特に赤ちゃんの場合は、少なくとも1メートル(39インチ)の距離を保ちますよう注意してください。
- (5) カメラとバッテリーを子供の手が届かない所に保管してください。
- (6) バッテリーを熱くするか、火源にさらすことはできません。そうするとバッテリーが爆発する可能性があります。

■ カメラの掃除とメンテナンス

- (1) カメラを長期間使用しない場合は、バッテリーを取り外し、塵のない乾燥場所で温度30°Cを超えない所に保管してください。
- (2) バッテリーの寿命を延ばすために、保管する前にバッテリーを完全に放電しておくようにしてください。
- (3) 満充電の後、少なくとも3ヶ月ごとにバッテリーを完全に放電してください。
- (4) レンズやスクリーンに塵や汚れが付着している場合は、きれいで柔らかいレンズクリーニングクロスで軽く拭き取ってください。
- (5) この機械は精密機器であるため、落下や強い衝撃や振動にさらさないように注意してください。

■ 故障の診断と対処

◎ 充電できない

- (1) 充電インジケータが点灯しない場合は、充電器が正しく差し込まれていないことを示唆しています。充電器の接続が正常かどうかを確認してください。
- (2) バッテリーは、10°Cから30°Cの温度範囲内で充電することをお勧めします。

◎ バッテリーの持続時間が不足している

- (1) バッテリーが完全に充電されているかどうかを確認してください。
- (2) 環境温度が10°Cを下回る場合は、バッテリーは急速に消費されます。
- (3) 使用モードに依存して、バッテリーの寿命は変わります。

◎ 認識できないメモリカード

- (1) メモリーカードは、クラス10 SDカードの仕様に適合し、最大128GBの容量を持つかどうかを確認してください。
- (2) メモリーカードが正しく挿入されているかどうかを確認してください。
- (3) このメモリーカードは、初めてカメラで使用され、フォーマットされていませんでした。

◎ メモリカードをフォーマットできない

- (1) SDカードがカメラでフォーマットできない場合は、カメラに挿入する前に、コンピューターでフォーマットしてみてください。
- (2) メモリーカードはクラス10ではありません。交換してみてください。

◎ フォーカスできない

- (1) カメラを揺らさず安定させてください。カメラは自動的に1-3秒以内にフォーカスを合わせます。
- (2) 撮影距離が3.3フィート未満の場合は、シャッターボタンを手動で半押ししてフォーカスを合わせることができます。ビデオ撮影の場合は、シャッターボタンを押し続けて押し留めする必要があります。

◎ コンピューターに接続できない

- (1) USBデータケーブルが正しく接続されているかどうかを確認してください。
- (2) コンピューターのUSBインターフェースが正常に動作しているかどうかを確認してください。
- (3) コンピューターシステムの互換性を確認してください。

親愛なるお客様:

ご支援をいただき、ありがとうございます! お客様の満足度は弊社の最優先事項であり、弊社の製品にご満足いただけたことを願っております。何かご質問やお手伝いが必要な場合は、弊社のプロのカスタマーサービスチームが喜んでお手伝いいたします。

以下のメールアドレスを通じてご連絡いただけます

E-mail:support@icirro.com

フォローをお願いします。
もっと多くのインストラクションを入手できます

www.icirro.com

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

*RF warning for portable device:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator & your body.

The FCC certification of this device refers to RF exposure testing performed in typical operating conditions, where a person is no closer than 0 centimeters from the device surface at all times, except for non-repetitive patterns with transient time intervals in the order of a second. Only in the stated conditions, the device is shown to fully comply with the FCC RF Exposure requirements of KDB 447498.