


InTOUCH04A-AllyW

FEATURES

- ▶ Hardened antiglare glass for easy cleaning
- ▶ Mounts with brackets
- ▶ Lightweight plastic chassis construction
- ▶ USB-C power in
- ▶
- WIFI2.4G+WIFI5G(B1+B4)
- ▶ Bluetooth
- ▶ AF camera 5 MP
- ▶ Android 13 MTK 8183 4+32G

GENERAL SPECS

Resolution	480 x 480 pixels
Viewing angle	80/80/80/80/ degrees
Brightness	350 cd/m2
Video input	N/A
Data input/output	USB-C, WiFi, BT
OSD	N/A
Unit color	Black or white

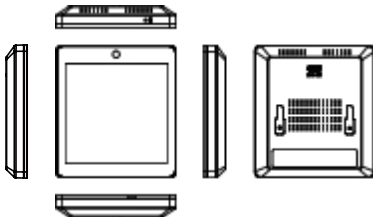

MONITOR SPECS

Display size	4 inch
View area	71.86 x 70.18
Touch technology	PCAP
Ppi	0.150 x 0.146 mm
Aspect ratio	1:1
Resolution	480 x 480 pixels
Response time	25 ms
Color support	16.7 M
Refresh rate	60 Hz
Brightness	350 cd/m2
Contrast ratio	800:1
Protective glass	Hardened
LED lifetime	30 000 h

UNITSPECS

Touch interface	10 Point PCAP 10 ms response
Power consumption	10W MAX
Power input	5V 2A
Unit dimensions	86 x 95 x 15 mm
Unit weight	0.15 kg
Operating temp.	0°C to 50°C / 32°F to 122°F
Operating humidity	20% to 90%, relative
Mounting options	Brackets X2, portrait landscape flat
Package dimensions	142 x 120 x 50 mm
Shipping weight	0.315 kg
Storage temp.	-20°C to 60°C / -4°F to 140°F
Storage humidity	5% to 90%, relative

IN THE BOX

Unit	InAIO00A
Video cables	N/A
Touch cables	N/A
Power supply	USB-C 5V 2A

WARRANTY

Standard	1-year return to depot
Extended	Optional

CERTIFICATIONS

Unit	CE, FCC, ROHS
Power supply	CE, FCC, ROHS, UL



Usage: Plug in 5V DC~ Wait for Welcome to click get started, enter connect to wifi, enter the wifi password, and then slide the screen up. The return key, origin key and square key will appear. Swipe up again and enter the main page. The home page can carry out emails, web browsers, albums, settings and searches.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly

approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

FCC Warning