




FEITUKEJI											
Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-3.97	-4.62	-3.88	-3.85	-4.00	-3.01	-3.27	-2.81	-3.08	-3.53	-2.63
Peak EIRP (dBm)	1.90	1.36	2.01	1.86	2.01	2.06	1.99	1.96	1.87	1.52	1.95
Directivity (dBi)	5.87	5.98	5.89	5.71	6.01	5.07	5.26	4.77	4.95	5.05	4.58
Efficiency (dB)	-3.97	-4.62	-3.88	-3.85	-4.00	-3.01	-3.27	-2.81	-3.08	-3.53	-2.63
Efficiency (%)	40.10	34.50	41.00	41.20	39.80	50.00	47.00	52.40	49.20	44.30	54.50
Gain (dBi)	1.90	1.36	2.01	1.86	2.01	2.06	1.99	1.96	1.87	1.52	1.95
NHPRP $\pm\pi/4$ (dBm)	-4.42	-4.87	-3.93	-3.72	-3.92	-2.95	-3.35	-3.18	-3.84	-4.33	-3.40
NHPRP $\pm\pi/6$ (dBm)	-5.97	-6.41	-5.46	-5.25	-5.45	-4.47	-4.86	-4.68	-5.33	-5.81	-4.88
NHPRP $\pm\pi/8$ (dBm)	-8.40	-8.81	-7.86	-7.64	-7.84	-6.83	-7.21	-6.99	-7.62	-8.09	-7.15
Upper Hem. PRP (dBm)	-6.50	-7.05	-6.32	-6.27	-6.43	-5.41	-5.67	-5.20	-5.46	-5.92	-5.03
Lower Hem. PRP (dBm)	-7.53	-8.28	-7.54	-7.56	-7.69	-6.73	-7.00	-6.54	-6.84	-7.28	-6.35
Upper Hem. PRP (%)	22.41	19.70	23.33	23.62	22.77	28.79	27.10	30.20	28.44	25.61	31.39
Lower Hem. PRP (%)	17.65	14.85	17.62	17.54	17.00	21.23	19.94	22.19	20.71	18.70	23.15

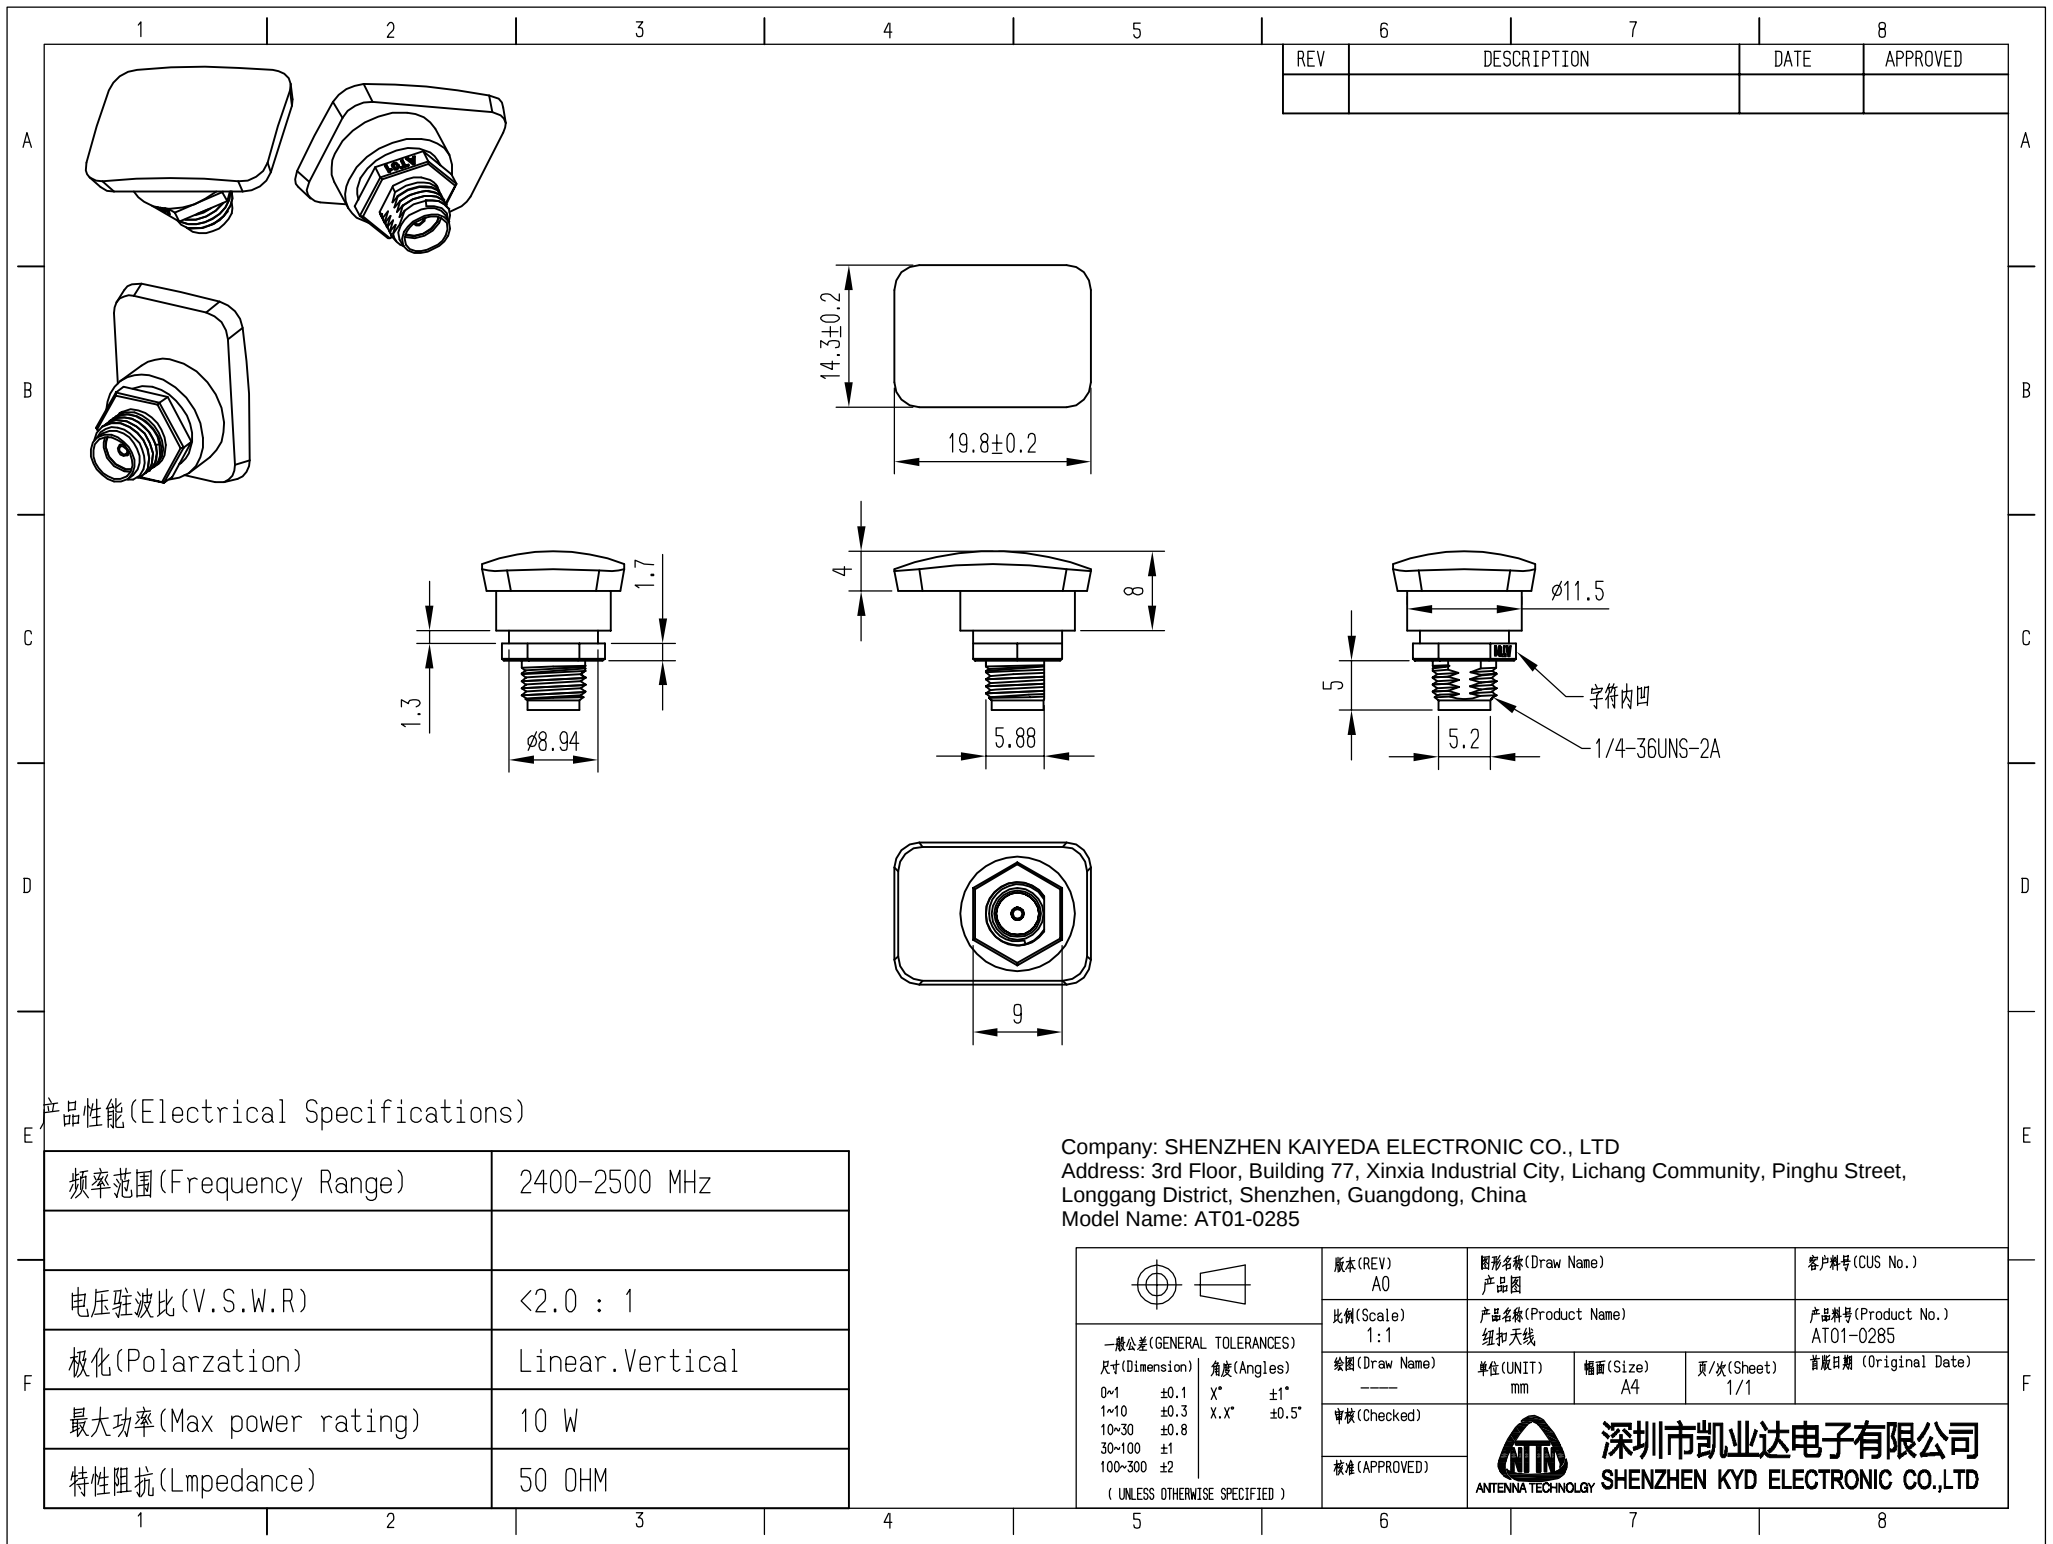