

## Unpack and Check Accessories

Please remove the product from the pack box carefully, please check whether the box contains all items listed in the table below before the pack box. If any items is lost or damaged during delivery, please contact seller.

### All Items

Ite	Unit	Quantity
Advanced Bluetooth Headset	PCS	1
Two Way Radio Bluetooth Adapter	PCS	1
Silicone Ear Tips	PCS	2
Charging Cable	PCS	1
User Manual	PCS	1


## Product description

### Walkie talkie bluetooth headset(Enhanced version)

This product can adapt two devices at the same time. It is equipped with built-in walkie-talkie dedicated wireless "PTT" button and environmental noise reduction function. It achieves simultaneous dual standby and radio priority calls when the bluetooth headset is in a mobile phone call or multimedia audio playing mode. When the two way radio receives a signal, it enters the intercom call state automatically. When intercom call ends, it returns to multimedia mode automatically after 8 seconds.

When a bluetooth headset is connected to a walkie-talkie and it needs to be connected with a mobile phone at the same time, please turn off the bluetooth headset, pair the bluetooth headset and the mobile phone. When the bluetooth headset connects with the mobile phone successfully, restart the bluetooth headset. It will connect the walkie-talkie and the mobile phone automatically.


1. Walkie talkie "PTT" button ( )
2. On/Off button ( )
  - Long press 2 seconds to turn on, then long press 2 seconds to turn off.
  - Long press 6 seconds to enter bluetooth pairing.
  - Press to pause and continue when you are listening to music. ( )
  - Press to answer the phone call. Then press again to end the call. ( )
3. Volume up button
  - Press the button to turn up the volume.
  - Long press 2 seconds to previous song.
4. Volume down button
  - Press the button to turn down the volume. ①
  - Long press 2 seconds to next song.
5. Headset earphone
6. USB charging port
7. Indicator
8. More functions
  - Noise reduction: press Power and Volume + button (②+④) simultaneously.
  - Language switching: press Power and Volume - button (②+③) simultaneously.
  - Pairing elimination: press Volume + and Volume - button (②+③) simultaneously. You will hear beep.



### Walkie -Talkie wireless adapter

#### Two Way Radio Bluetooth Adapter Pairing

- 1: On/Off  
Long press Multi-function button for 2 seconds, blue light glints, power on. Then long press Multi-function button for 3 seconds, red light glints, power off.
2. Pairing  
When the bluetooth adapter is TURNED OFF, long press the Multi-function button for about 7 seconds to enter pairing status. ( Red and blue light glint alternately. )
3. Put the wireless PTT key and the bluetooth adapter together. Press the wireless PTT key's button for about 1 second. The Bluetooth adapter's red light disappear. It Means the wireless PTT key is paired with bluetooth adapter successfully.
4. Put the bluetooth adapter and the bluetooth headset together(both are red and blue lights glint alternately). Wait for about 40 seconds(first pairing). When their alternant red and blue lights disappear and only blue light glints. It means the bluetooth earpiece is paired with bluetooth adapter successfully.



## Indicator Light

**Blue light flashes slowly:** power on, in standby mode.

**Blue light flashes fast :** the bluetooth connection is interrupted, please check whether the bluetooth earphone is turned on or has exceeded the bluetooth connection distance


**Red light on:** device is transmitting. When it is over, red light off.

**Low battery tips:** In standby mode, the red light flashes means low battery, please charge in time.

### Installation/ Removal

**Installation:** Insert the adapter into the intercom port. (figure 1)


**Removal :** unplug the adapter from the intercom port.(figure 2)

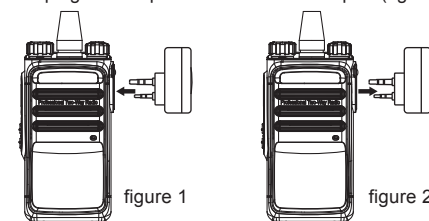

### Wireless PTT key

Indicator light

PTT Button  
( Press PPT button to transmit;  
PTT Pairing Refer Page 5)

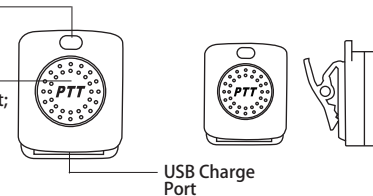

### Charging Instructions:

This product uses MINI USB charging port. It can be charged by standard DC 5V power supply(computer's USB port, power bank).When it is charging--red light on. If it is full charged-- red light off.

# Walkie talkie bluetooth headset

## 对讲机蓝牙耳机挂 K/M口

**FCC Warning:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**Caution:** Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.