


ANT Report

Manufacturer:	Shenzhen shenyue Technology Co., Ltd.
Add:	Room 6c2, Meipeng Business Center, No.11, Changfa Middle Road, Bantian Street, Longgang
Model:	RF-108
Date:	October 11, 2024
Versions:	V1.0



1. Ant Size:

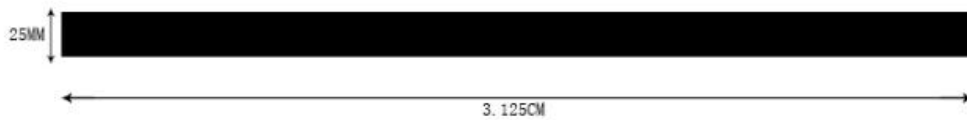

2. Test equipment list

name	Manufacturer	Model
Network analyzer	KEYSIGHT	E5071C
Network analyzer	KEYSIGHT	E5071C
Comprehensive Measuring Instrument	R&S	CWM500
OTA test system	GTS	RayZone-5000

3. Test setup

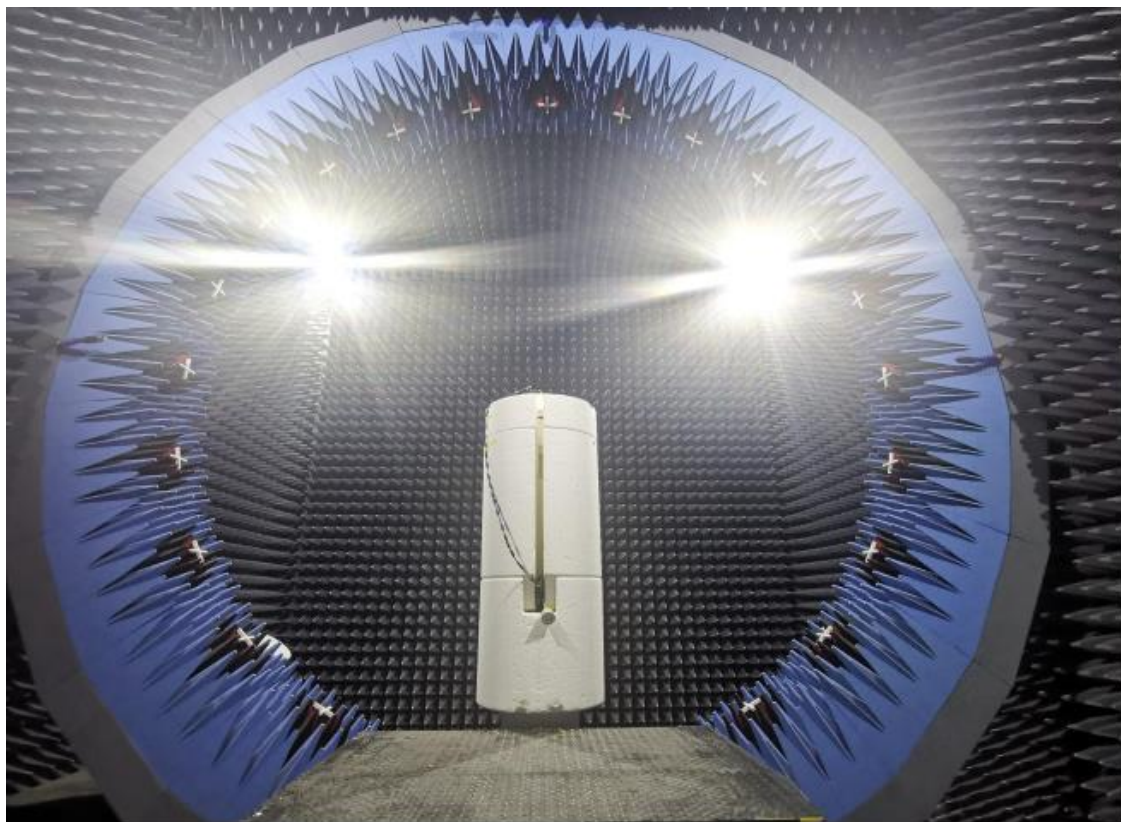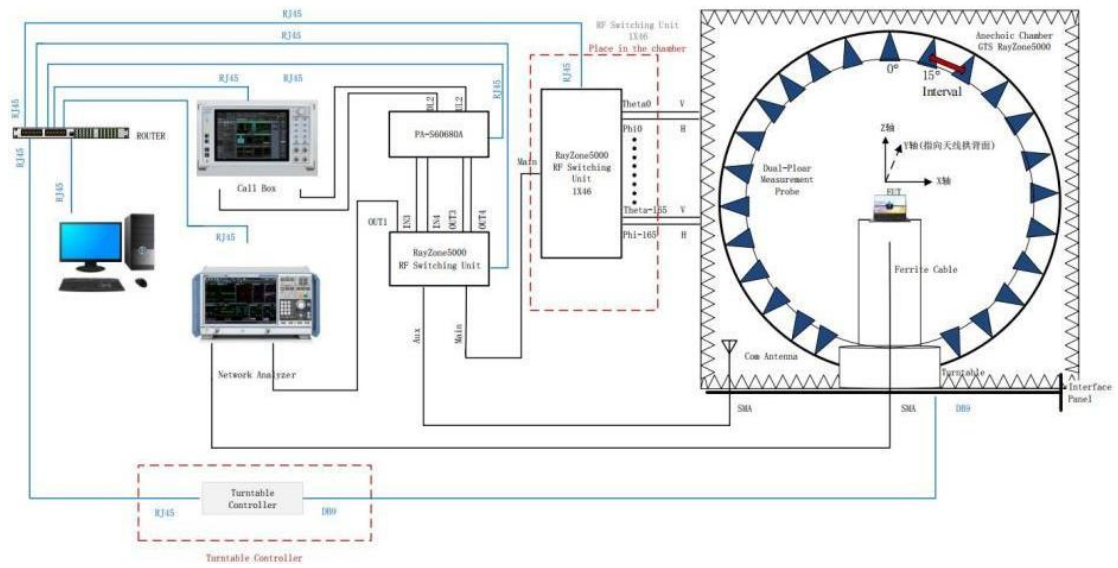



4. Performance parameter

Frequency range	2400-2500MHz
VSWR	≤ 7.0
Input impedance	50 Ω
Peak Gain(dBi)	1.65
Antenna type	Wire Antenna
Temperature	-40~80

5. VSWR Test Data

Frequency(MHz)	Return Loss	VSWR
2400	-8.11	2.14
2450	-10.87	1.82
2500	-10.84	2.18

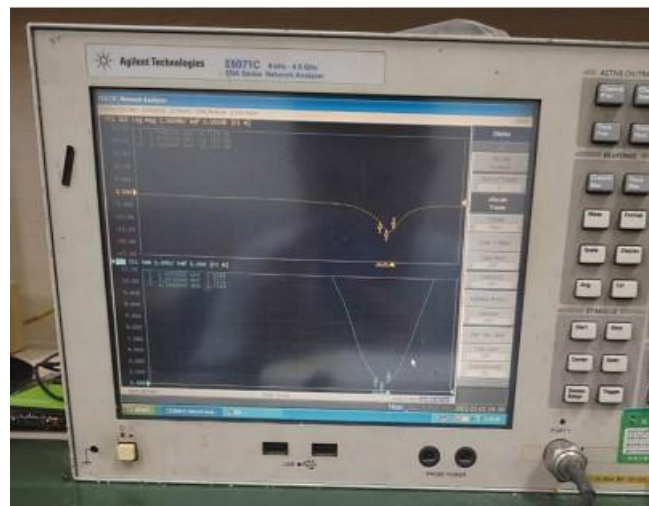


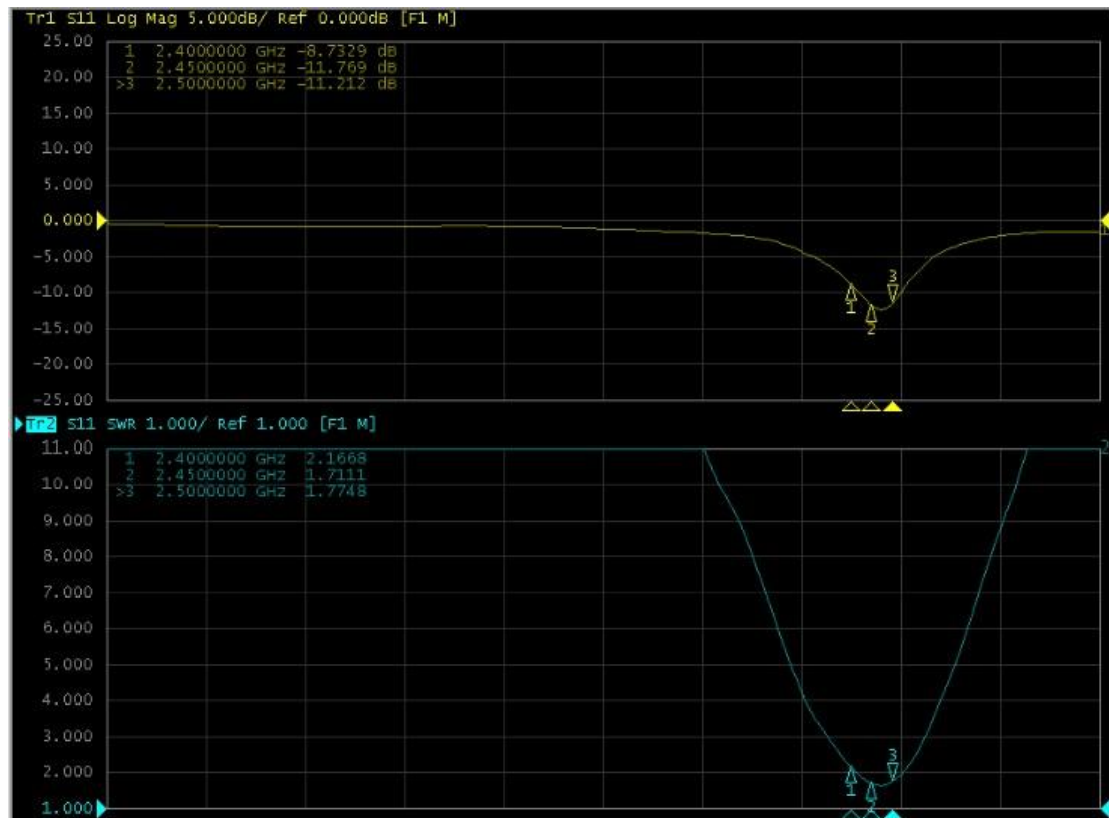


6. Gain and Effi

Frequency(MHz)	Effi	Peak Gain
2400	1.60	1.65
2410	1.26	1.29
2420	1.68	1.16
2430	1.36	1.04
2440	1.52	1.25
2450	1.24	1.33
2460	1.24	1.04
2470	1.53	0.90
2480	1.64	1.30
2490	1.26	0.94
2500	1.67	0.97


7. Test Directional diagram

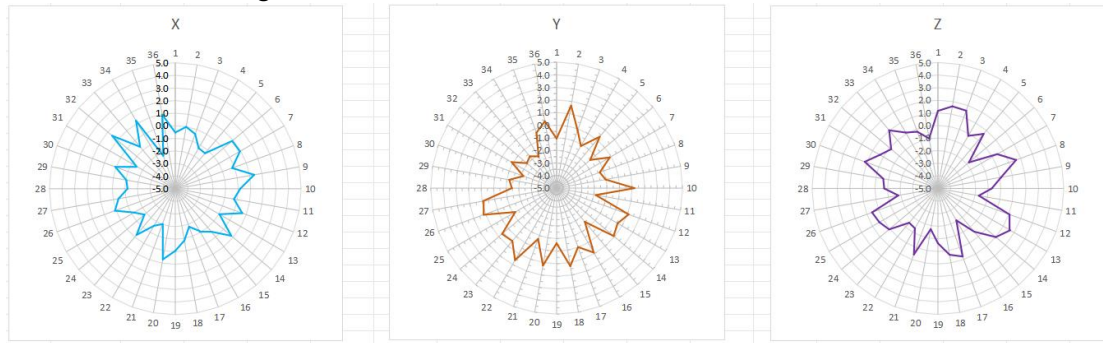

2400MHz

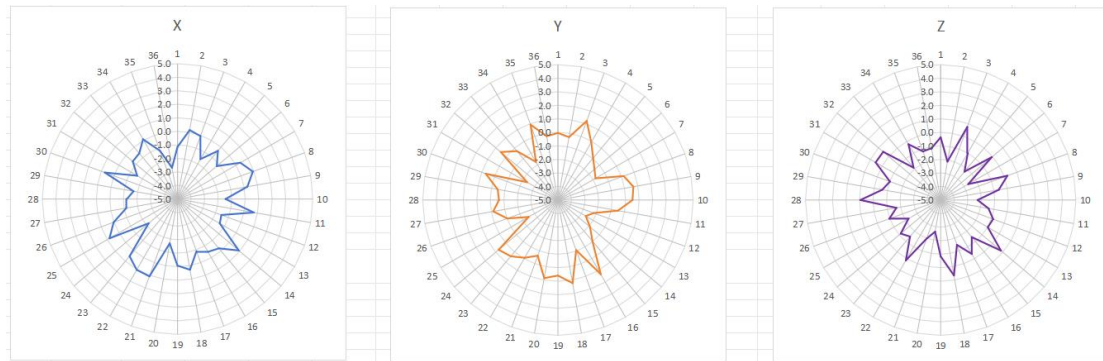

2440MHz

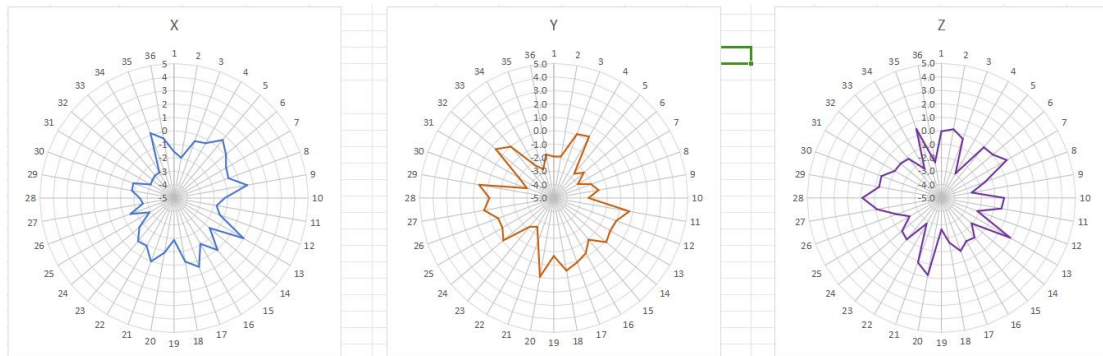

2500MHz

-----The end-----