



FCC TEST REPORT

FCC ID: 2BMAL-QL955

Applicant: Yiwu Zhuangmei Technology Co., Ltd

Address: First floor, No. 44 Chengian Mingtang, Sikou, Shangxi Town, Yiwu City, Jinhua City, Zhejiang Province

Manufacturer: Yiwu Zhuangmei Technology Co., Ltd

Address: First floor, No. 44 Chengian Mingtang, Sikou, Shangxi Town, Yiwu City, Jinhua City, Zhejiang Province

EUT: radio

Trade Mark: N/A

Model Number: QL-955
QL-06, QL-07, QL-08, QL-09, BC-R21, -R60, BC-R119

Date of Receipt: Nov. 06, 2024

Test Date: Nov. 06, 2024 - Nov. 15, 2024

Date of Report: Nov. 15, 2024

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC Part 15 Subpart B
ANSI C63.4:2014

Test Result: Pass

Report Number: DL-241106018ER

Prepared (Test Engineer): Dimon Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY.....	3
3. GENERAL INFORMATION.....	4
4. TEST INSTRUMENT USED.....	5
5. CONDUCTED EMISSION TEST.....	6
6. RADIATION EMISSION TEST.....	8
7. TEST SEUUP PHOTO.....	18
8. EUT PHOTOGRAPHS.....	18

**1. VERSION**

Version No.	Date	Description
00	Nov. 15, 2024	Original

2. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Result	Remark
FCC PART 15 B	Conducted Emission at power ports	Class B	N/A	
	Radiated Emission below 1GHz	Class B	PASS	
	Radiated Emission above 1GHz	Class B	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

(2) Test Facility: Shenzhen DL Testing Technology Co., Ltd.

(3) Address:101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

(4) The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing DL Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the DL Testing, responsible for this Test Report.



3. GENERAL INFORMATION

3.1 Description of Device (EUT)

EUT: radio

Trade Mark: N/A

Model Number: QL-955
QL-06, QL-07, QL-08, QL-09, BC-R21, -R60, BC-R119

Test Model: QL-955

Model Difference: All models except model name and appearance color, size. The internal structure is the same as the circuit.

Power Supply: DC 3V from battery

Working Frequency: FM: 87-108MHz
AM: 520-1710KHz

NOTE:

(1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(2) The EUT's all information provided by client.

3.2 Tested System Details

None.

3.3 Block Diagram of Test Set-up



3.4 Test Mode Description

Mode1.: On Mode(FM)

Mode2.: On Mode(AM)

3.5 Test Auxiliary Equipment

None.

3.6 Test Uncertainty

Conducted Emission Uncertainty : $\pm 2.56\text{dB}$

Radiated Emission Uncertainty below 1GHz : $\pm 3.24\text{dB}$

Radiated Emission Uncertainty above 1GHz : $\pm 4.89\text{dB}$



4. TEST INSTRUMENT USED

For Conducted Emission Test (843 Shielded Room)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
Clamp	COM-POWER	CLA-050	431072	Nov. 01, 2024	Oct. 31, 2025
3-Loop Antenna	DAZE	ZN30401	13021	Nov. 01, 2024	Oct. 31, 2025
ISN T8	Schwarzbeck	NTFM 8158	101135	Nov. 01, 2024	Oct. 31, 2025
ISN T5	Schwarzbeck	NTFM 8158	101136	Nov. 01, 2024	Oct. 31, 2025
843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025
843 Cable 1#	ChengYu	CE Cable	002	Nov. 01, 2024	Oct. 31, 2025

For Radiated Emission Test (966 chamber)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
966 chamber	YIHENG	966 Room	966	Nov. 06, 2023	Nov. 05, 2026
Spectrum Analyzer	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
EMI Receiver	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
Amplifier	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
Amplifier	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Nov. 01, 2024	Oct. 31, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Nov. 01, 2024	Oct. 31, 2025
966 Cable 1#	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
966 Cable 2#	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025


Other

Name	Manufacturer	Model	Software version
EMC Conduction Test System	FALA	EZ_EMG	EMC-CON 3A1.1
EMC radiation test system	FALA	EZ_EMG	FA-03A2

5. CONDUCTED EMISSION TEST

5.1 Block Diagram of Test Setup

For Mains Terminals Test

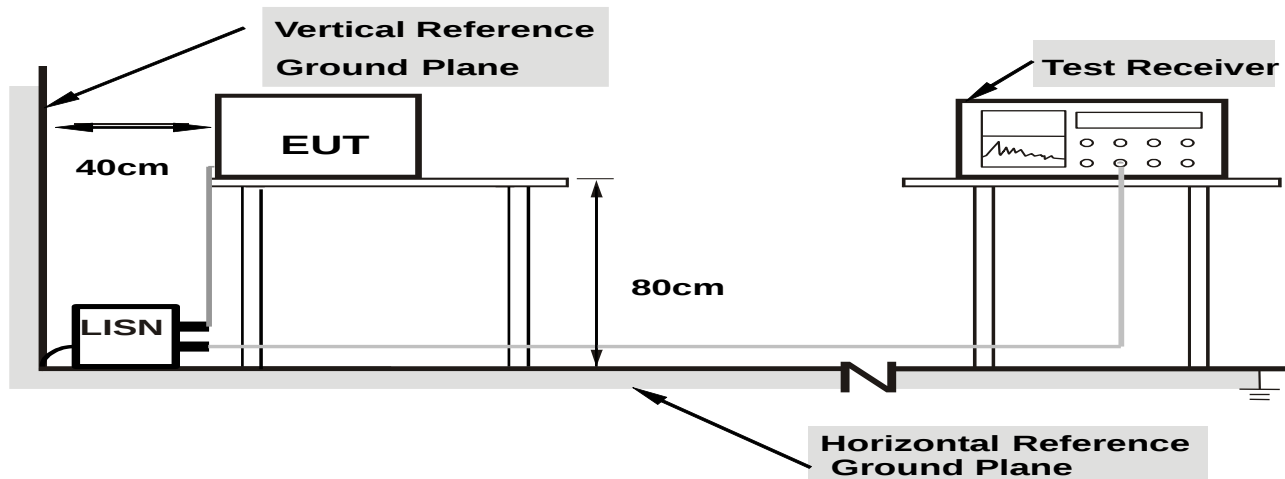

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.2 Test Standard and Limit

FCC PART 15 B

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15~0.50	66 ~ 56*	55 ~ 46*
0.50~5.00	56	46
5.00~30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

5.3 EUT Configuration on Test

The following equipment's are installed on conducted emission test to meet FCC PART 15 B requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4 Operating Condition of EUT

5.4.1 Setup the EUT and simulators as shown in Section 5.1.

5.4.2 Turn on the power of all equipments.

5.4.3 Let the EUT work in test modes and test it.



5.5 Test Procedure

The EUT is put on the table and connected to the AC mains through a Artificial Mains Network (AMN) or ISN. This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **ANSI C63.4** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 10KHz.

The frequency range from 150 KHz to 30 MHz is investigated.

5.6 Test Result


The EUT is powered by DC, no requirements for this item.




6. RADIATION EMISSION TEST

6.1 Block Diagram of Test Setup

Below 1GHz

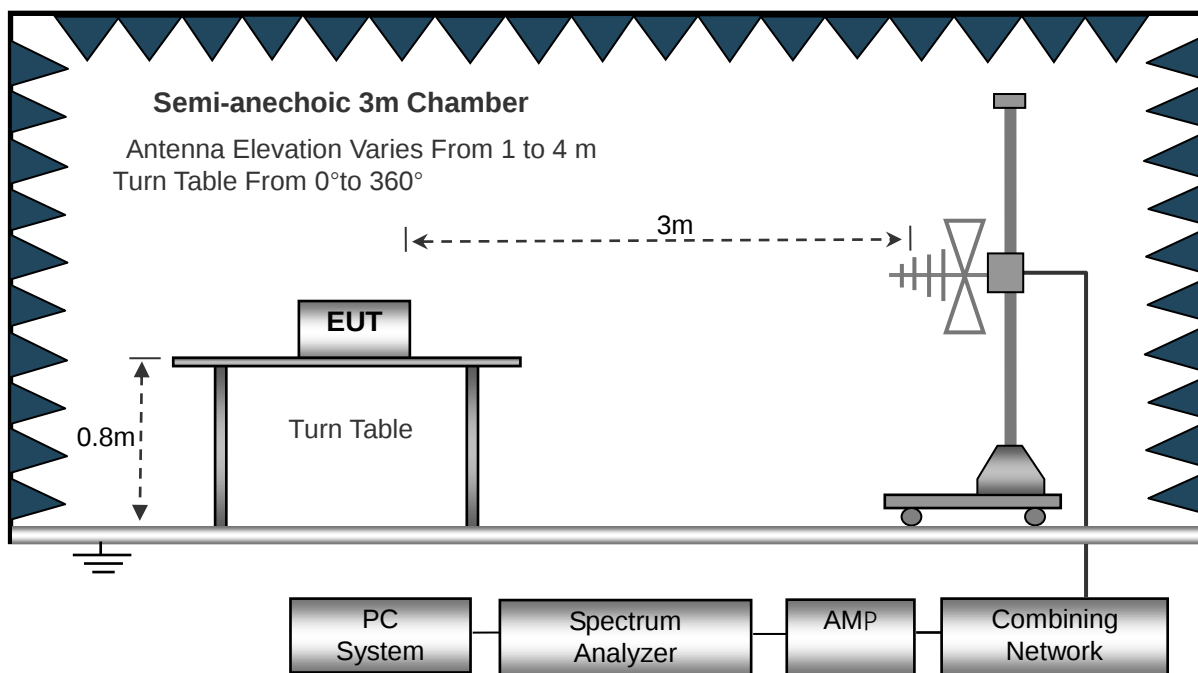

Above 1GHz

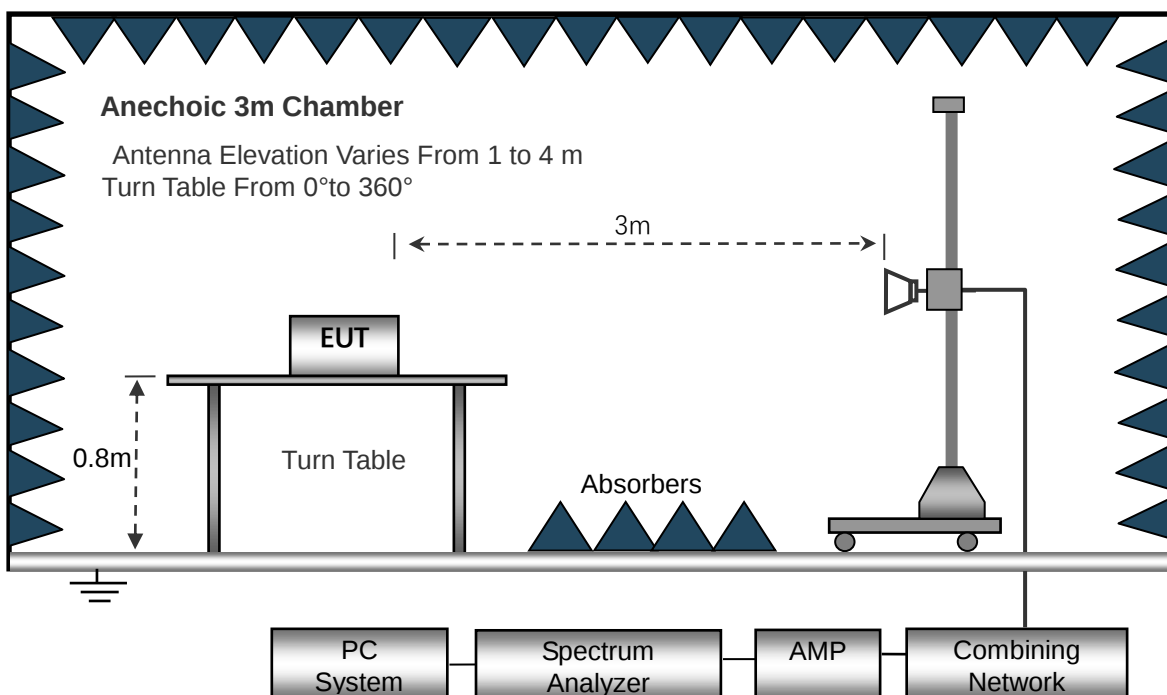

6.2 Test Standard and Limit



FCC PART 15 B

Below 1GHz

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m)
30 ~ 88	3	40.0
88 ~ 216	3	43.5
216 ~ 960	3	46.0
960 ~ 1000	3	54.0

Above 1GHz

Frequency MHz	Distance (Meters)	Field Strengths Limits dB(μ V)/m	Detector
1000~6000	3	74.0	PEAK
1000~6000	3	54.0	AVERAGE

Remark:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

6.3 EUT Configuration on Test

The FCC PART 15 B regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 5.3.

6.4 Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.4 except the test set up replaced as Section 6.2.

6.5 Test Procedure

1) The radiated emissions test was conducted in a semi-anechoic chamber.

2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.8m of insulation.

3) Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.

4) The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

5) The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.

6) The frequency range from 30MHz to 1000MHz is checked.


6.6 Test Result

PASS

Please refer to the following page.



Radiation Emission Test Data(Below 1GHz)			
Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	DC 3V	Test Mode:	Mode 1

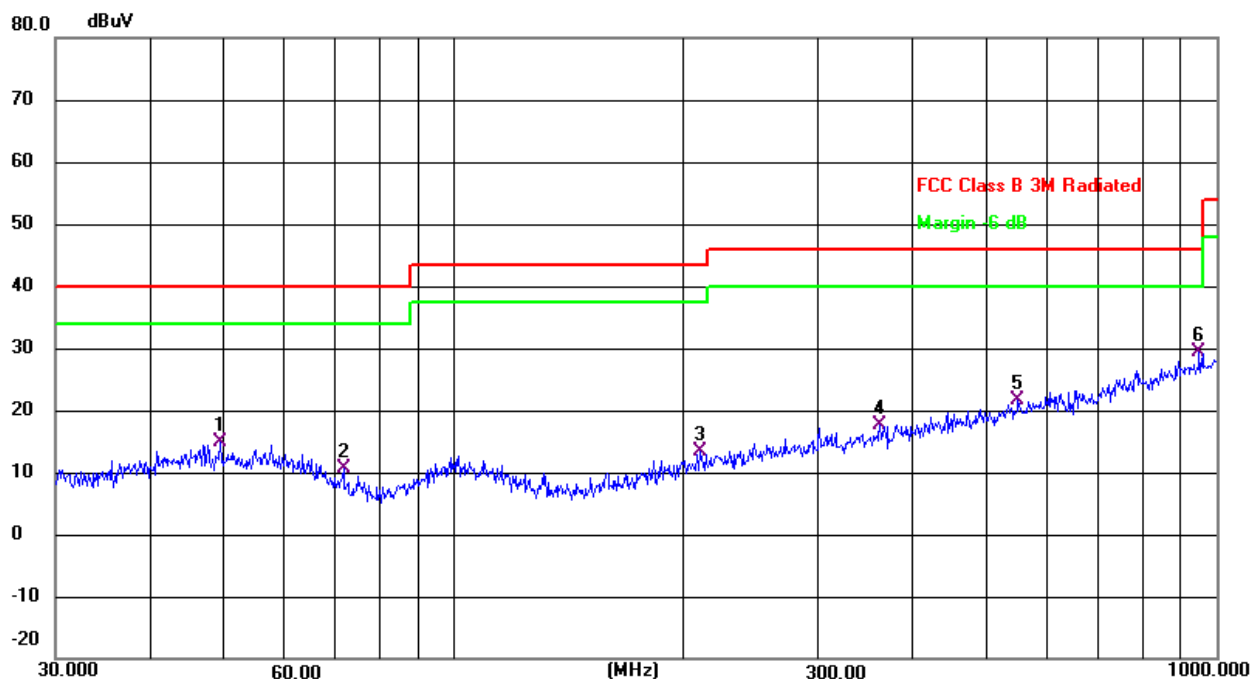

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dB	dB	
1		49.3594	27.74	-12.89	14.85	40.00	-25.15	QP
2		71.5806	27.90	-17.35	10.55	40.00	-29.45	QP
3		210.0482	27.91	-14.42	13.49	43.50	-30.01	QP
4		361.7139	27.99	-10.29	17.70	46.00	-28.30	QP
5		549.0195	27.75	-6.15	21.60	46.00	-24.40	QP
6	*	948.7610	29.76	-0.27	29.49	46.00	-16.51	QP


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



Radiation Emission Test Data(Below 1GHz)			
Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	DC 3V	Test Mode:	Mode 1

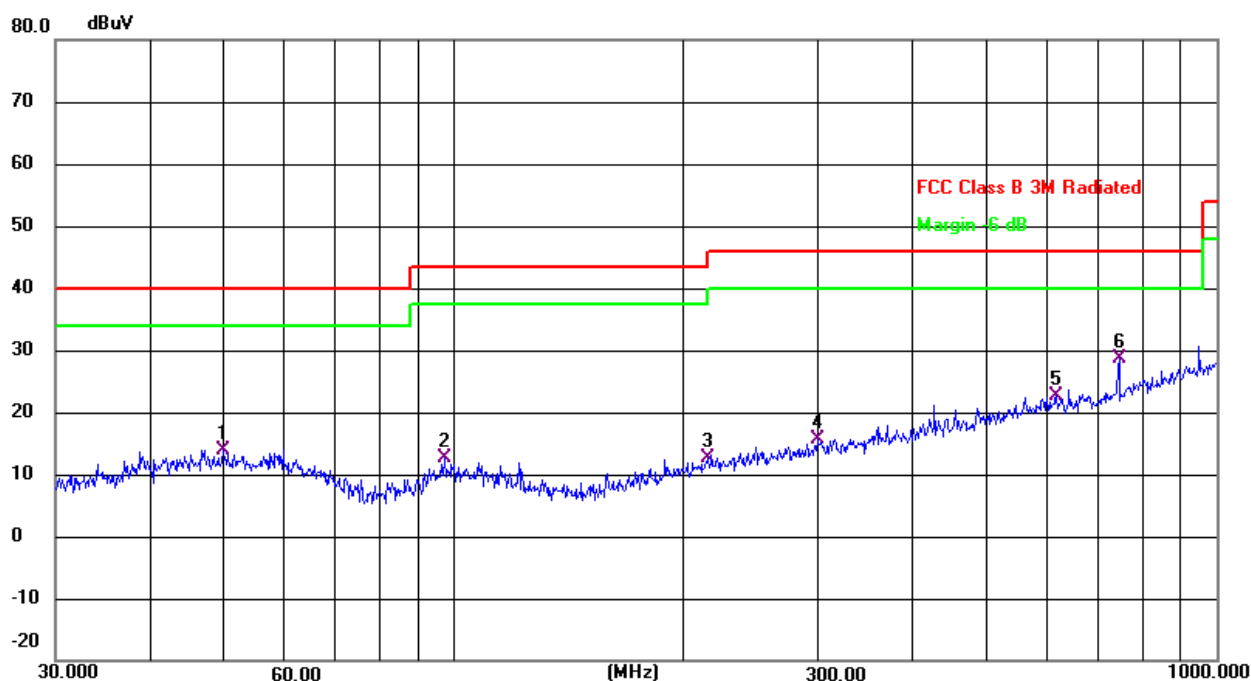

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		49.7068	26.84	-12.87	13.97	40.00	-26.03	QP
2		97.1148	28.11	-15.52	12.59	43.50	-30.91	QP
3		215.2678	27.02	-14.28	12.74	43.50	-30.76	QP
4		299.3158	27.42	-11.68	15.74	46.00	-30.26	QP
5		616.3718	27.74	-5.11	22.63	46.00	-23.37	QP
6	*	744.8661	31.78	-3.25	28.53	46.00	-17.47	QP


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



Radiation Emission Test Data(Below 1GHz)			
Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	DC 3V	Test Mode:	Mode 2

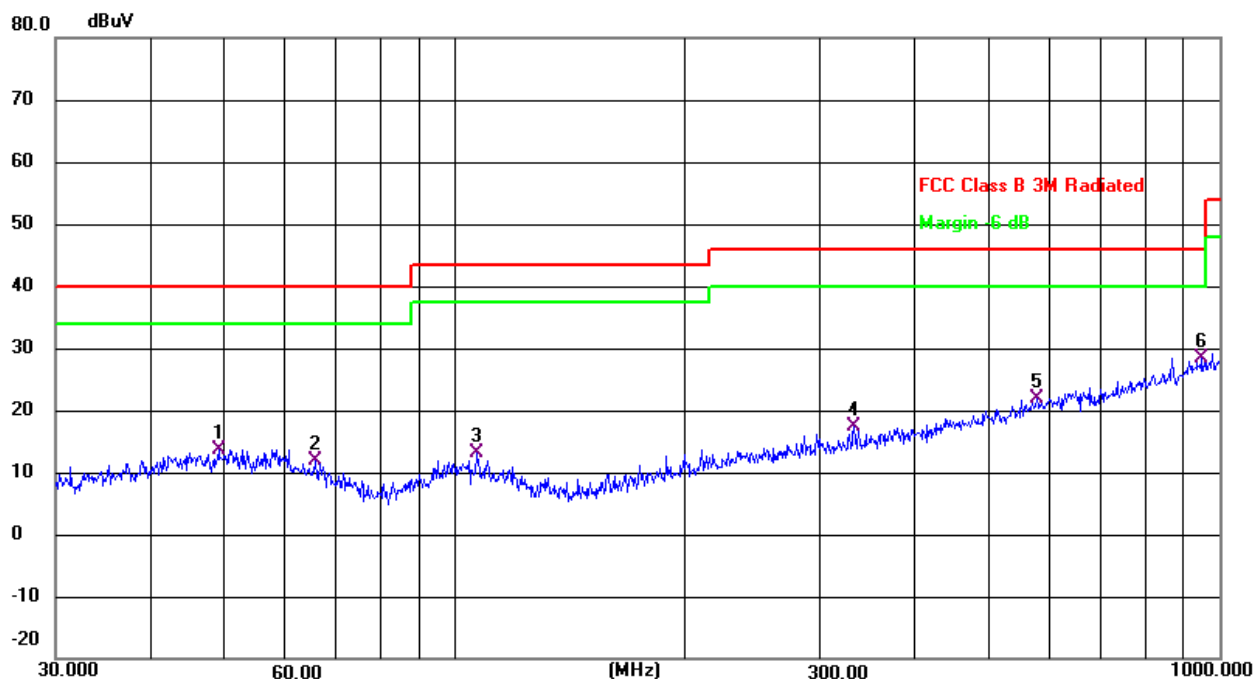

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		49.0145	26.68	-12.94	13.74	40.00	-26.26	QP
2		65.5727	27.02	-15.11	11.91	40.00	-28.09	QP
3		106.7587	27.93	-14.73	13.20	43.50	-30.30	QP
4		332.5187	28.55	-11.16	17.39	46.00	-28.61	QP
5		576.6443	27.56	-5.79	21.77	46.00	-24.23	QP
6	*	948.7610	28.66	-0.27	28.39	46.00	-17.61	QP

Remark:


Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



Radiation Emission Test Data(Below 1GHz)

Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	DC 3V	Test Mode:	Mode 2

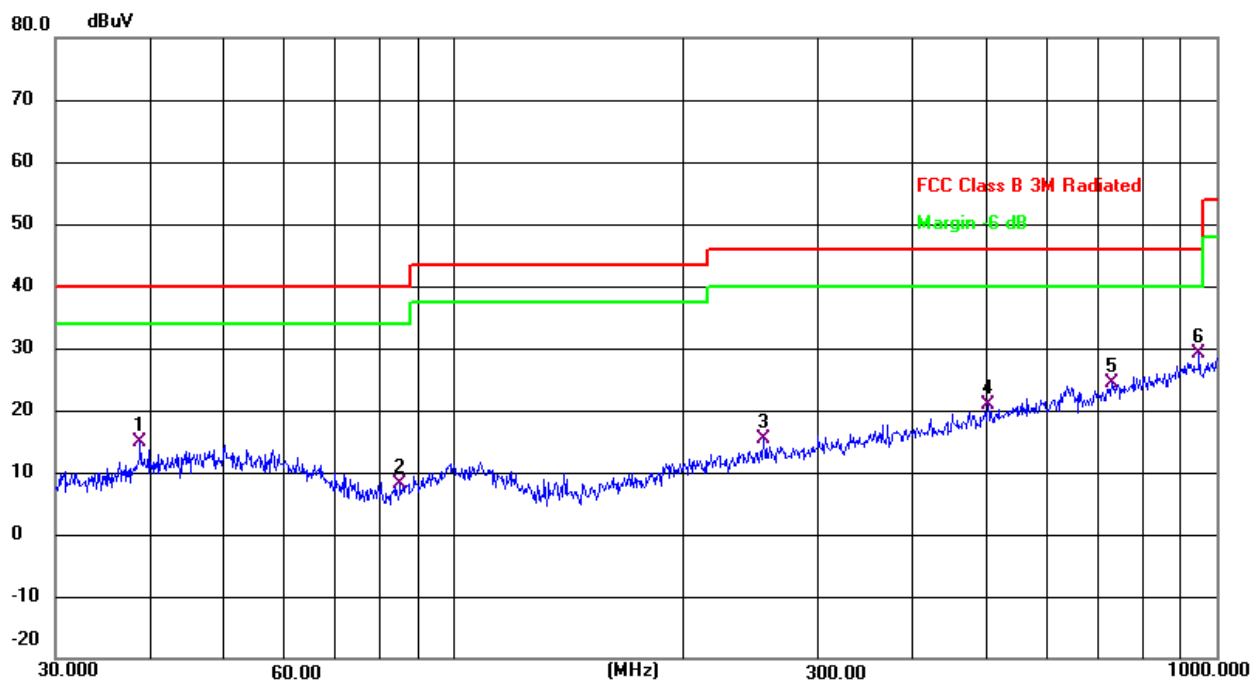

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		38.7518	29.25	-14.40	14.85	40.00	-25.15	QP
2		84.9995	26.21	-18.01	8.20	40.00	-31.80	QP
3		254.7284	28.51	-13.19	15.32	46.00	-30.68	QP
4		501.1790	28.35	-7.37	20.98	46.00	-25.02	QP
5		729.3583	28.06	-3.56	24.50	46.00	-21.50	QP
6	*	948.7610	29.34	-0.27	29.07	46.00	-16.93	QP


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



Radiation Emission Test Data(Above 1GHz)			
Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	DC 3V	Test Mode:	Mode 1

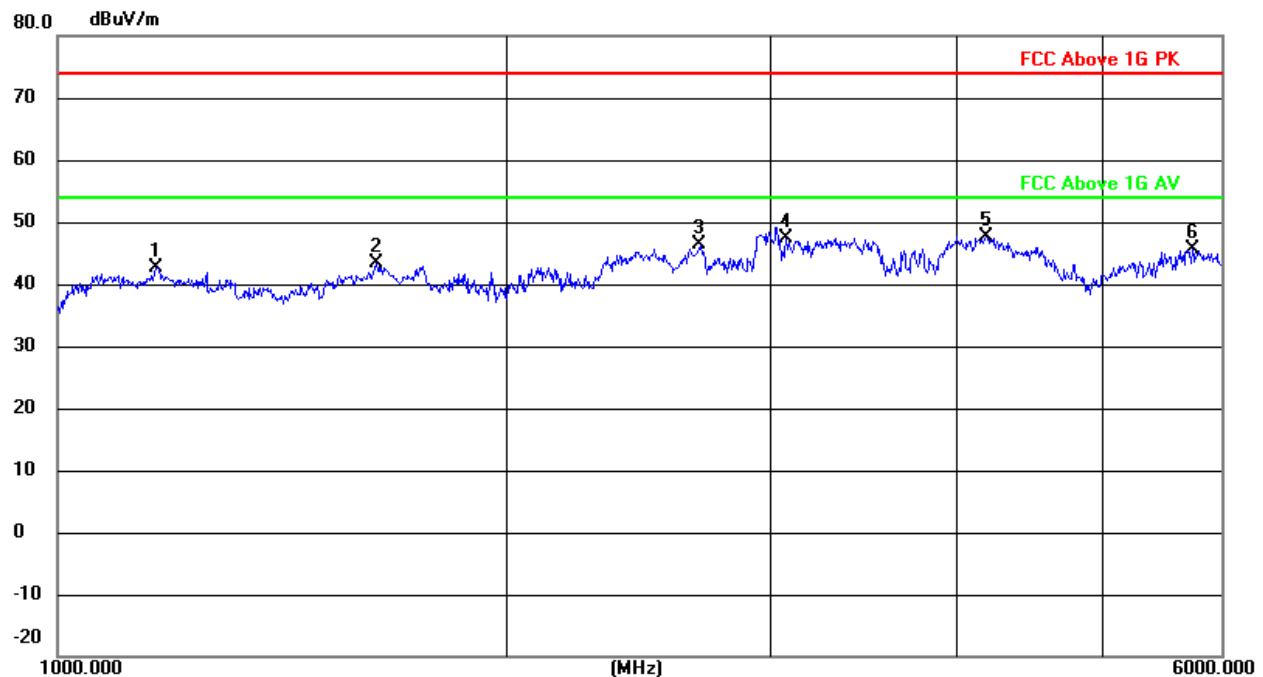

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		1164.509	65.50	-22.87	42.63	74.00	-31.37	peak
2		1633.855	64.50	-21.21	43.29	74.00	-30.71	peak
3		2688.682	66.64	-20.17	46.47	74.00	-27.53	peak
4		3069.889	64.40	-17.12	47.28	74.00	-26.72	peak
5	*	4177.964	62.12	-14.56	47.56	74.00	-26.44	peak
6		5737.167	55.56	-10.03	45.53	74.00	-28.47	peak


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



Radiation Emission Test Data(Above 1GHz)			
Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	DC 3V	Test Mode:	Mode 1

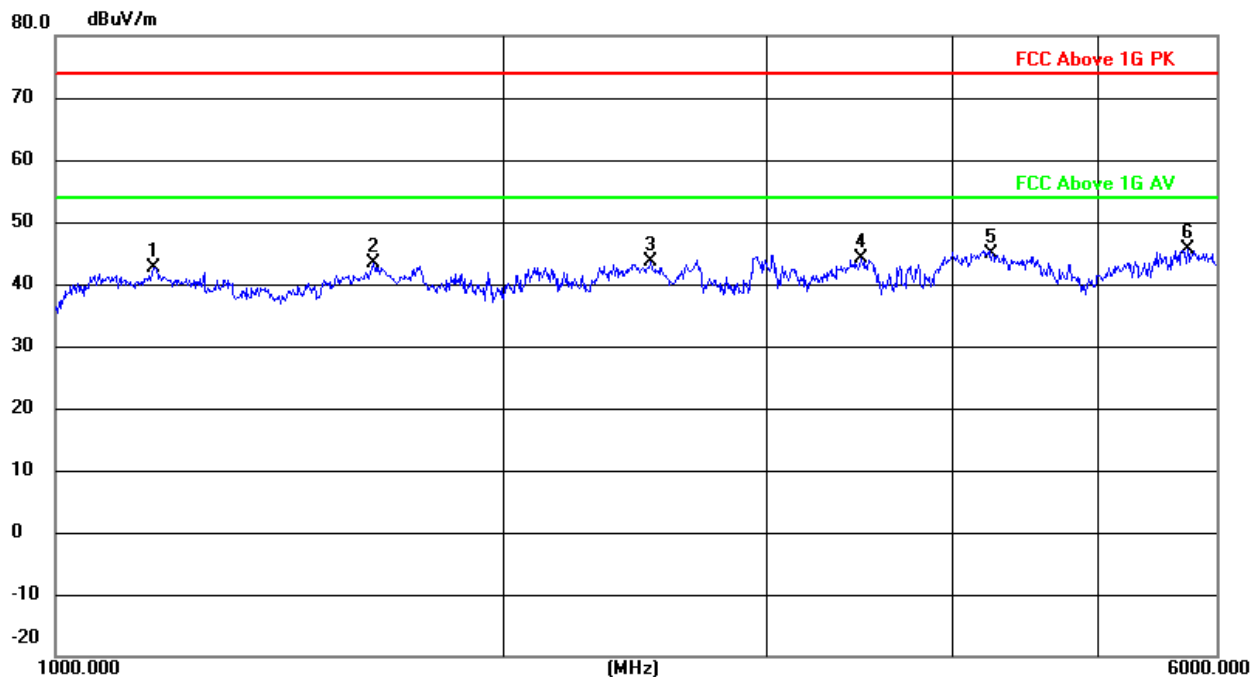

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		1164.509	65.50	-22.87	42.63	74.00	-31.37	peak
2		1633.855	64.50	-21.21	43.29	74.00	-30.71	peak
3		2507.215	63.92	-20.24	43.68	74.00	-30.32	peak
4		3467.664	60.50	-16.34	44.16	74.00	-29.84	peak
5		4245.883	59.12	-14.31	44.81	74.00	-29.19	peak
6	*	5737.167	55.56	-10.03	45.53	74.00	-28.47	peak


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



Radiation Emission Test Data(Above 1GHz)			
Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	DC 3V	Test Mode:	Mode 2

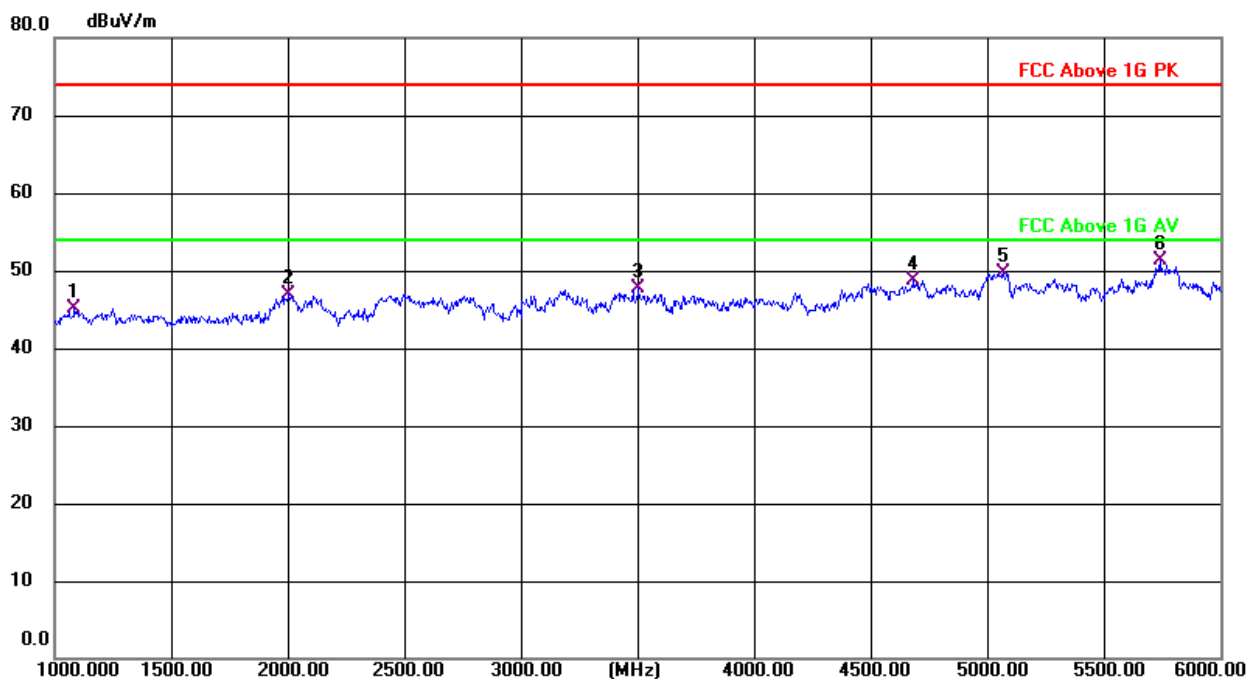

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		1085.000	57.97	-12.96	45.01	74.00	-28.99	peak
2		2005.000	55.21	-8.39	46.82	74.00	-27.18	peak
3		3505.000	54.04	-6.42	47.62	74.00	-26.38	peak
4		4685.000	54.79	-6.06	48.73	74.00	-25.27	peak
5		5070.000	55.15	-5.48	49.67	74.00	-24.33	peak
6	*	5740.000	56.49	-5.26	51.23	74.00	-22.77	peak


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;

**Radiation Emission Test Data(Above 1GHz)**

Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	DC 3V	Test Mode:	Mode 2

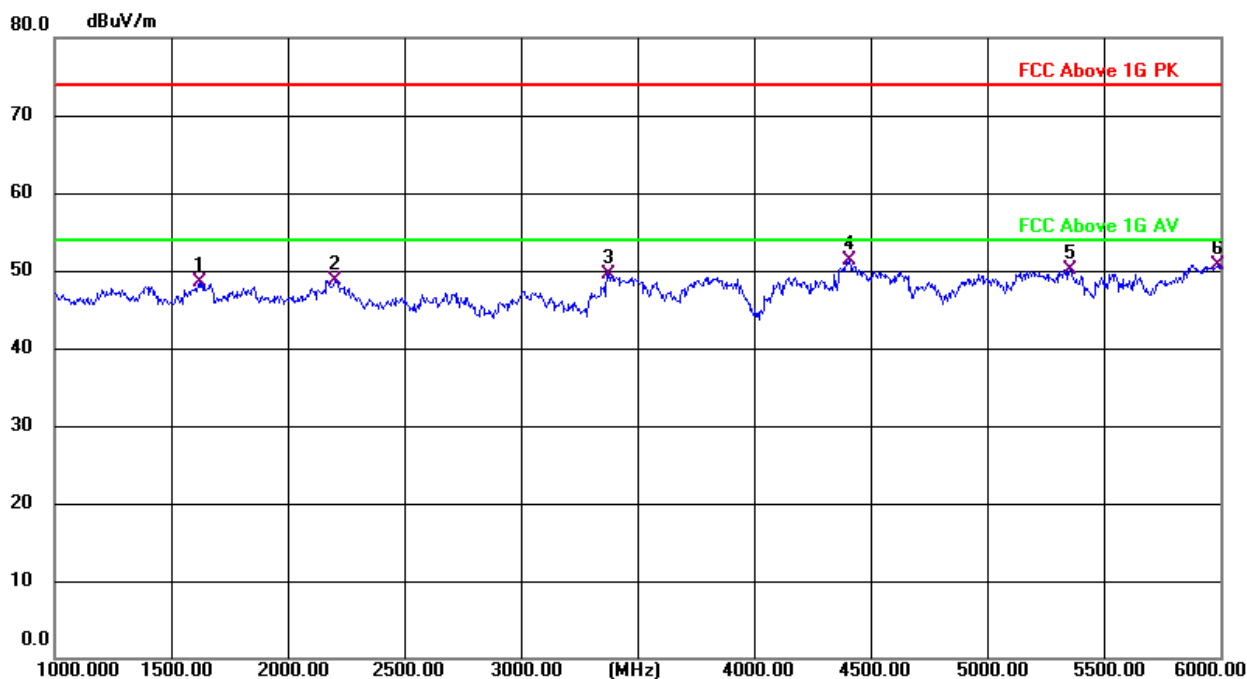

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		1625.000	58.09	-9.59	48.50	74.00	-25.50	peak
2		2200.000	56.97	-8.18	48.79	74.00	-25.21	peak
3		3375.000	56.03	-6.48	49.55	74.00	-24.45	peak
4	*	4410.000	57.79	-6.54	51.25	74.00	-22.75	peak
5		5355.000	55.37	-5.30	50.07	74.00	-23.93	peak
6		5990.000	56.11	-5.33	50.78	74.00	-23.22	peak

Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



7. TEST SEUUP PHOTO

Reference to the appendix I for details.

8. EUT PHOTOGRAPHS

Reference to the appendix II for details.

******* END OF REPORT *******