

JFIND® JF327

OBDII SCANNER BLE

User Manual

Content

I .Product Specification	1
II .Vehicle Compatibility&OBDII Protocols	2
III .Supported APPs	3
IV .Connection Steps	4
V .FAQ and Trouble Shooting	14
VI .Support and Warranty	17

I .Product Specifications

Communication:	Bluetooth 5.1
Master Chip:	PIC18F25K80
Hardware Version:	V1.5 (the best)
Support System:	Android & IOS
Working Voltage:	9v~16v
Working Current:	35mA
Standby Current:	25mA
Operating Temperature:	-40℃~85℃
Working Humidity:	less than 60%



- ① Connect Successfully
- ② OBD Data
- ③ Power

- 1 -

II . Supported OBDII Protocols

SAE J1850PWM	(41.6Kbaud)
SAE J1850VPW	(10.4Kbaud)
ISO9141-2	(5baudinit,10.4Kbaud)
ISO 14230-4KWP	(5baudinit,10.4Kbaud)
ISO 14230-4KWP	(fastinit,10.4Kbaud)
ISO 15765-4CAN	(11bitID,500Kbaud)
ISO 15765-4CAN	(29bitID,500Kbaud)
ISO 15765-4CAN	(11bitID,250Kbaud)
ISO 15765-4CAN	(29bitID,250Kbaud)

Vehicle Compatibility

Cars and light trucks since the following year:

USA	1996-NOW
EU	2001-NOW
JP/KR	2010-NOW
RU	2012-NOW

- 2 -

III. Supported APPs

Car Scanner/OBD Auto Doctor/Torque/
DashCommand/ELM327 Identifier /...



Car Scanner



OBD Auto Doctor



Torque



ELM327 Identifier



Dash Command



- 3 -

IV . Connection Steps

1.Download the app from phone store



2.Start the engine and plug in the device to OBD2 port



- 4 -

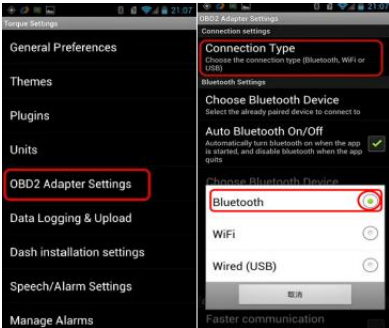
How to use device of Android-Torque?

- 1.Turn on the phone Bluetooth and connect to "JFIND JF327", the password is 1234 or 0000
2. Click Settings button → Settings



- 5 -


3 . Click OBD II Adapter Settings



- 6 -

4 . Select Bluetooth according to product type

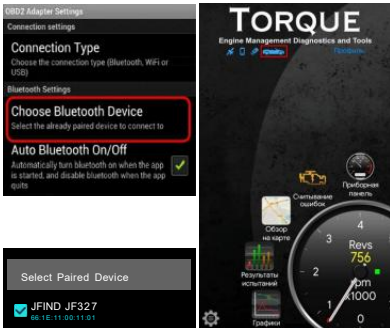5 . For Bluetooth device. please select "JFIND JF327"










- 7 -

6 . The car icon appears and stops flashing means connected successfully

7. Realtime information display



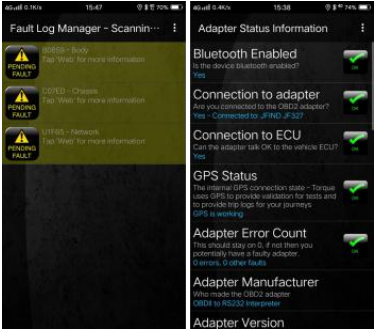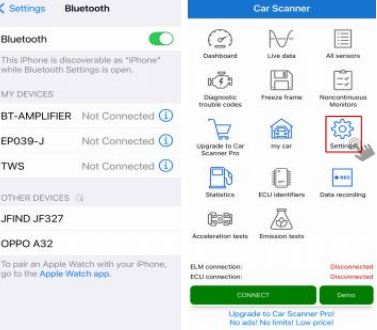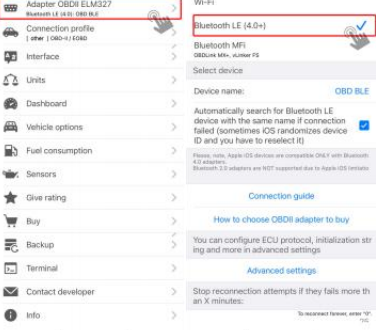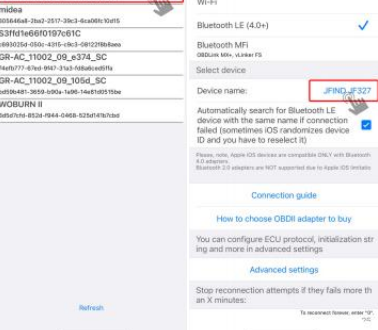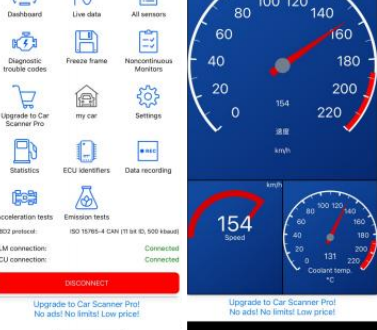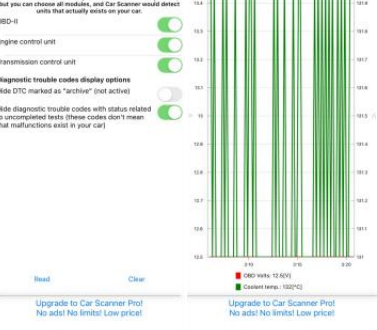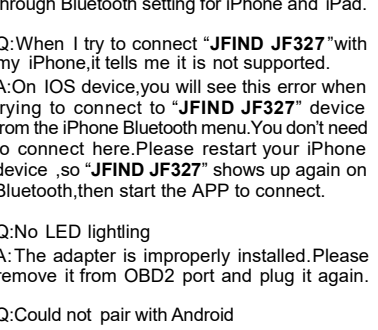- 8 -

9. Read & clear trouble codes  - 9 -	10.Adapter status information  - 10 -	How to use device of IOS Car Scanner 1.Turn on bluetooth of your iPhone ,do not press connect 2.Open"Car Scanner" Choose "Settings"  - 11 -	3.Click"Adapter OBDII ELM327"-Bluetooth LE(4.0+)  - 12 -	4.Choose "JFIND JF327",  - 13 -	5.Connect successfully  - 14 -	6. Function display  - 15 -	VI. FAQ and TroubleShooting Q:Which device dose it support? A:It works with IOS ,Android and Windows device Via Bluetooth. Remember not to pair with "JFIND JF327" through Bluetooth setting for iPhone and iPad. Q:When I try to connect "JFIND JF327"with my iPhone,it tells me it is not supported. A:On IOS device,you will see this error when trying to connect to "JFIND JF327" device from the iPhone Bluetooth menu.You don't need to connect here.Please restart your iPhone device ,so "JFIND JF327" shows up again on Bluetooth,then start the APP to connect. Q:No LED lightling A:The adapter is improperly installed.Please remove it from OBD2 port and plug it again. Q:Could not pair with Android A:Turn off Bluetooth and turn it back on - 16 -	(sometimes a few times);restart your phone, disconnect any other Bluetooth devices from your phone;clear Bluetooth cache/storage: Setting-Apps(show system)-Bluetooth-Storage & Cache,clear and restart the phone. Q:APP does not connect to the "JFIND JF327" device. A:Make sure the APP is compatible and the correct connection setting is made.Remove and re-install the app;then try with another app. Q:Pair with Android phone,but disconnects quickly. A:If it stays connected for only a few seconds then becomes previously connected device, don't worry,normally it's still connected.You just start the app and see if you select "JFIND JF327" as the Bluetooth device to connect. Q:Can i leave the device plugged in all the time? A:OBD2 connector is always powered for most vehicles,As it use low energy Bluetooth,you can leave the device plugged in days to 3 weeks depending on the battery condition, However ,it's always recommended to remove it when it's not in use . - 17 -	VI.Support and Warranty One Year Warranty We promise to provide warranty service for 1 Year from the date of original purchase ,which must meet the following conditions: 1)The warranty are limited to repairing or replacing new equipment,without additional cost ,but need to mention for order number or invoices. 2)The warranty does not cover any damages caused by use ,misuse or installation and testing. For technical support or warranty service , please contact distributor. Please describe your issue in as many details as possible,and include a screenshot if you get any error message . It usually will be answered within 24hours. - 18 -
--	--	---	---	--	---	--	---	--	---

Warning Statement This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: -Reorient or relocate the receiving antenna. -Increase the separation between the equipment and receiver. -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -Consult the dealer or an experienced radio/TV technician for help. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. - 19 -
